



PHONES

(044) 360-7-130
 (050) 336-0-130
 (063) 788-0-130
 (067) 233-0-130
 (068) 282-0-130

130

COM.UA

Internet store of autogoods



ICQ

294-0-130
 597-0-130

SKYPE
 km-130

CAR RECEIVERS — Receivers • Media receivers and stations • Native receivers • CD/DVD changers • FM-modulators/USB adapters • Flash memory • Facia plates and adapters • Antennas • Accessories |
 CAR AUDIO — Car audio speakers • Amplifiers • Subwoofers • Processors • Crossovers • Headphones • Accessories | TRIP COMPUTERS — Universal computers • Model computers • Accessories |
 GPS NAVIGATORS — Portable GPS • Built-in GPS • GPS modules • GPS trackers • Antennas for GPS navigators • Accessories | VIDEO — DVR • TV sets and monitors • Car TV tuners • Cameras • Videomodules • Transcoders • Car TV antennas • Accessories | SECURITY SYSTEMS — Car alarms • Bike alarms • Mechanical blockers • Immobilizers • Sensors • Accessories | OPTIC AND LIGHT — Xenon • Bixenon • Lamps • LED • Stroboscopes • Optic and Headlights • Washers • Light, rain sensors • Accessories | PARKTRONICS AND MIRRORS — Rear parktronic • Front parktronic • Combined parktronic • Rear-view mirrors • Accessories | HEATING AND COOLING — Seat heaters • Mirrors heaters • Screen-wipers heaters • Engine heaters • Auto-refrigerators • Air conditioning units • Accessories | TUNING — Vibro-isolation • Noise-isolation • Tint films • Accessories | ACCESSORIES — Radar-detectors • Handsfree, Bluetooth • Windowlifters • Compressors • Beeps, loudspeakers • Measuring instruments • Cleaners • Carsits • Miscellaneous | MOUNTING — Installation kits • Upholstery • Grilles • Tubes • Cable and wire • Tools • Miscellaneous | POWER — Batteries • Converters • Start-charging equipment • Capacitors • Accessories | MARINE AUDIO AND ELECTRONICS — Marine receivers • Marine audio speakers • Marine subwoofers • Marine amplifiers • Accessories | CAR CARE PRODUCTS — Additives • Washer fluid • Care accessories • Car polish • Flavors • Adhesives and sealants | LIQUID AND OIL — Motor oil • Transmission oil • Brake fluid • Antifreeze • Technical lubricant



In store "130" you can find and buy almost all necessary goods for your auto in Kyiv and other cities, delivery by ground and postal services. Our experienced consultants will provide you with exhaustive information and help you to chose the very particular thing. We are waiting for you at the address

<http://130.com.ua>

audison

www.audison.com

ADVANCED MANUAL


SRx3

540W Power Amplifier
Three Channel Power Amplifier with crossover



Specifications

Control panel and terminals

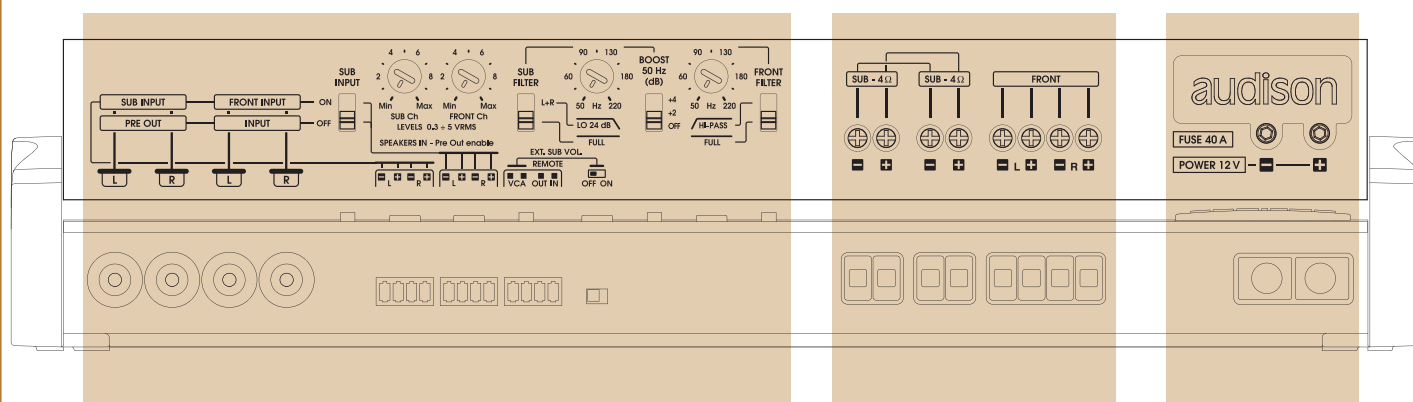

Inputs / Outputs / Functions

Power Outputs

Power Supply


Specifications

Configuration table


Conf.	AMP	FRONT Ch	SUB Ch	PRE OUT only with SUB IN OFF
1				
2				
3				
4				

	FRONT Ch	SUB Ch	PRE OUT
SUB INPUT ON	FRONT IN	SUB IN	OFF
SUB INPUT OFF	FRONT IN	FRONT IN	ON (FRONT)


Pre in

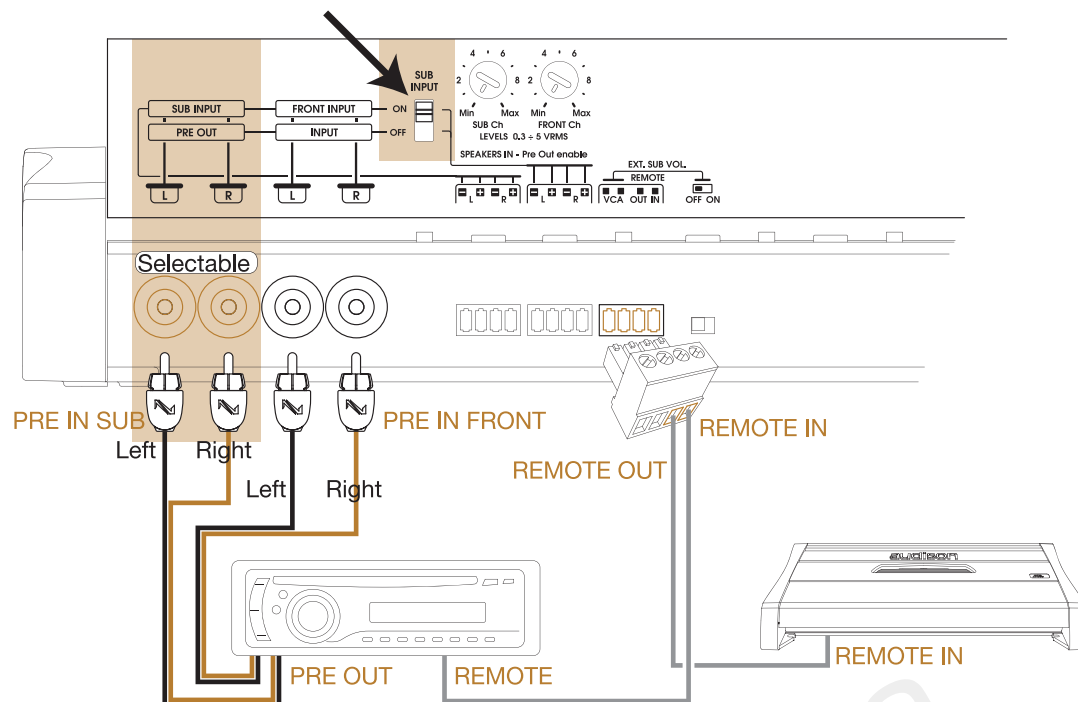


Speaker in

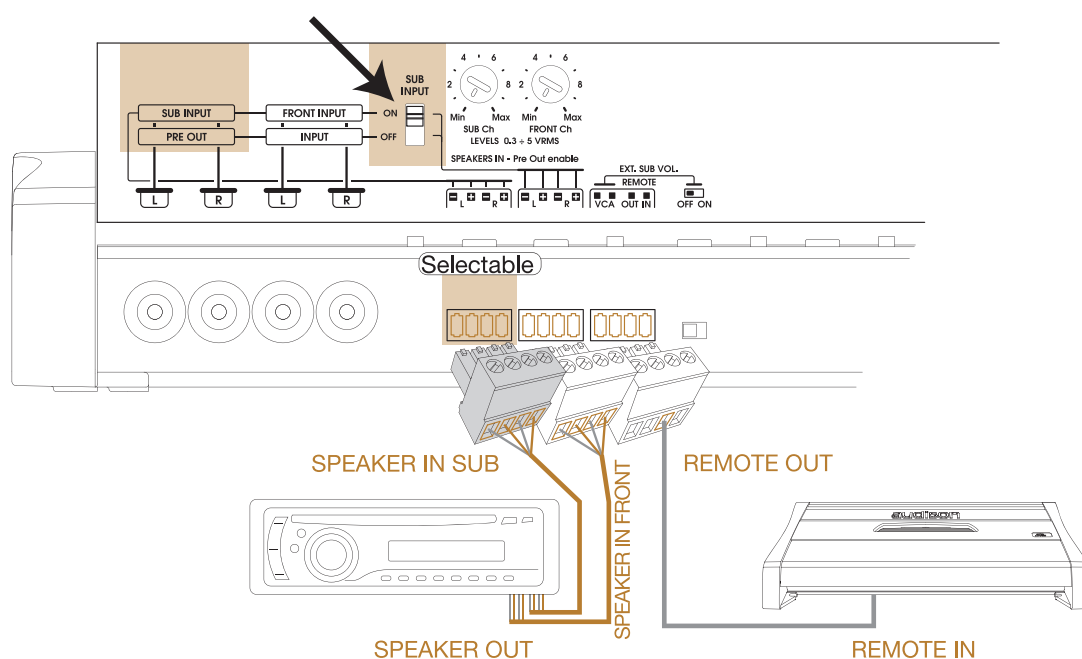

Remote

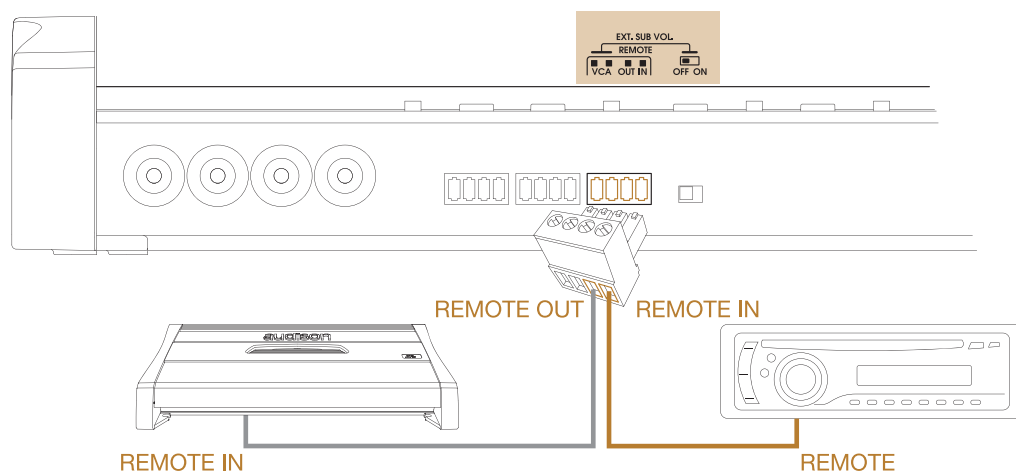


Subwoofer remote control



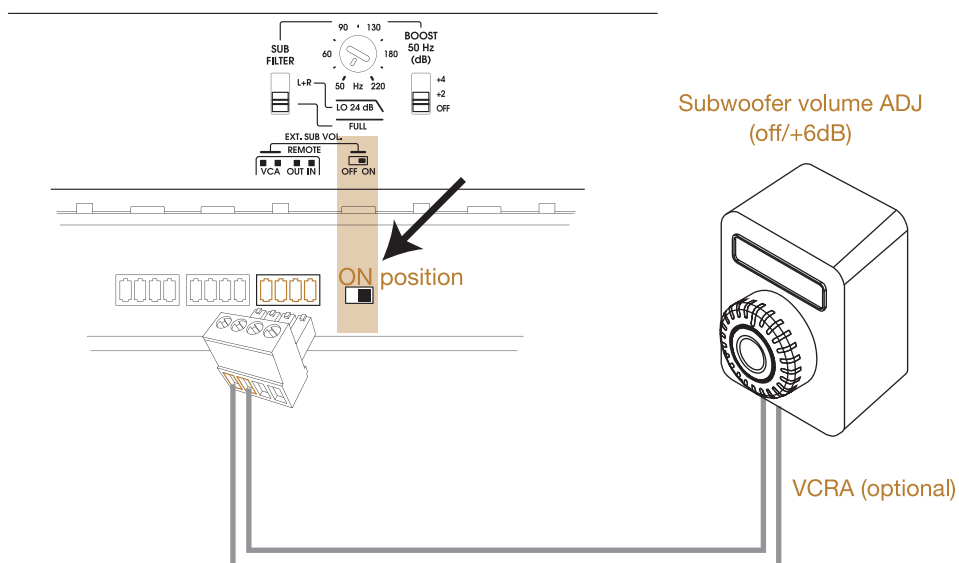


Power outputs

Front + Subwoofer

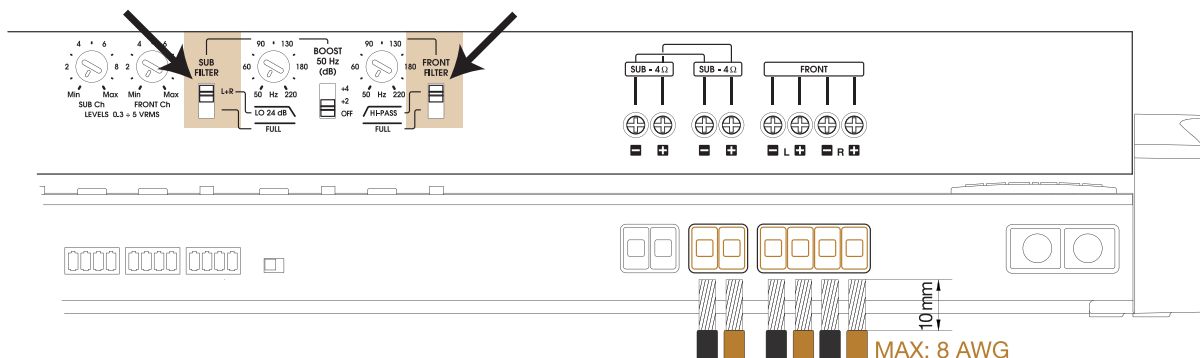


Boost

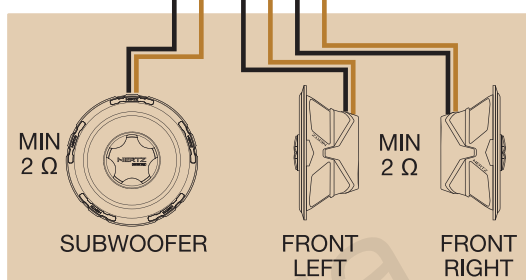




Power outputs

Front + Subwoofer (more than one)

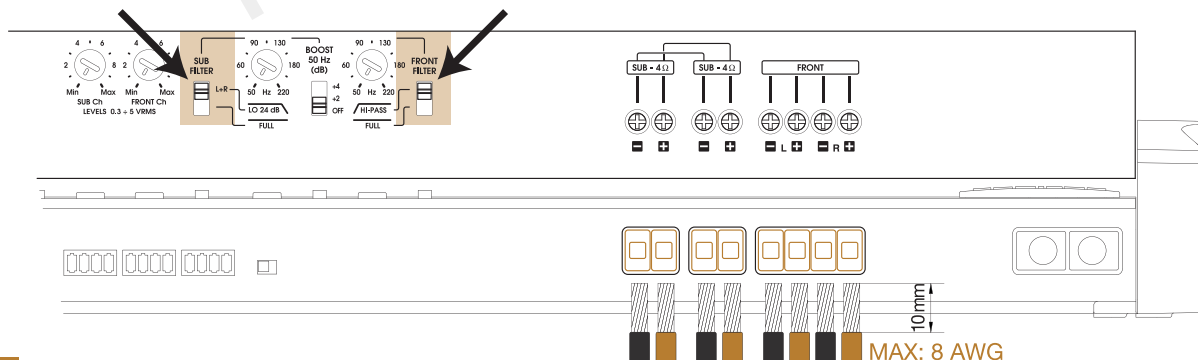


Boost

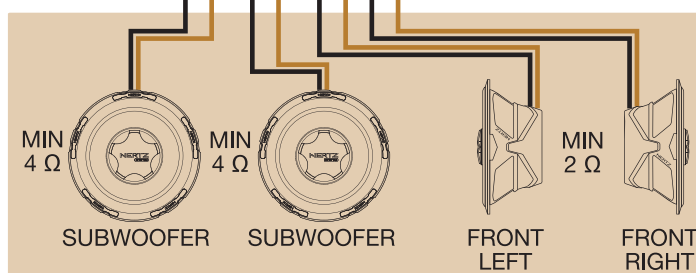


OUTPUTS

Pre Out with Speaker in

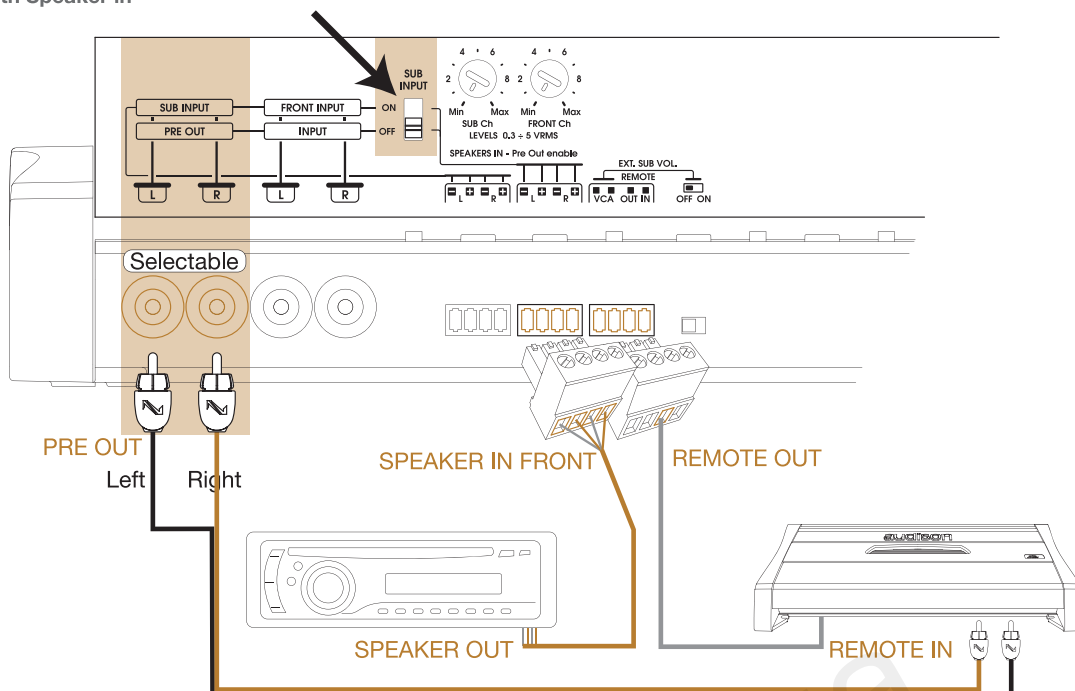

Caution

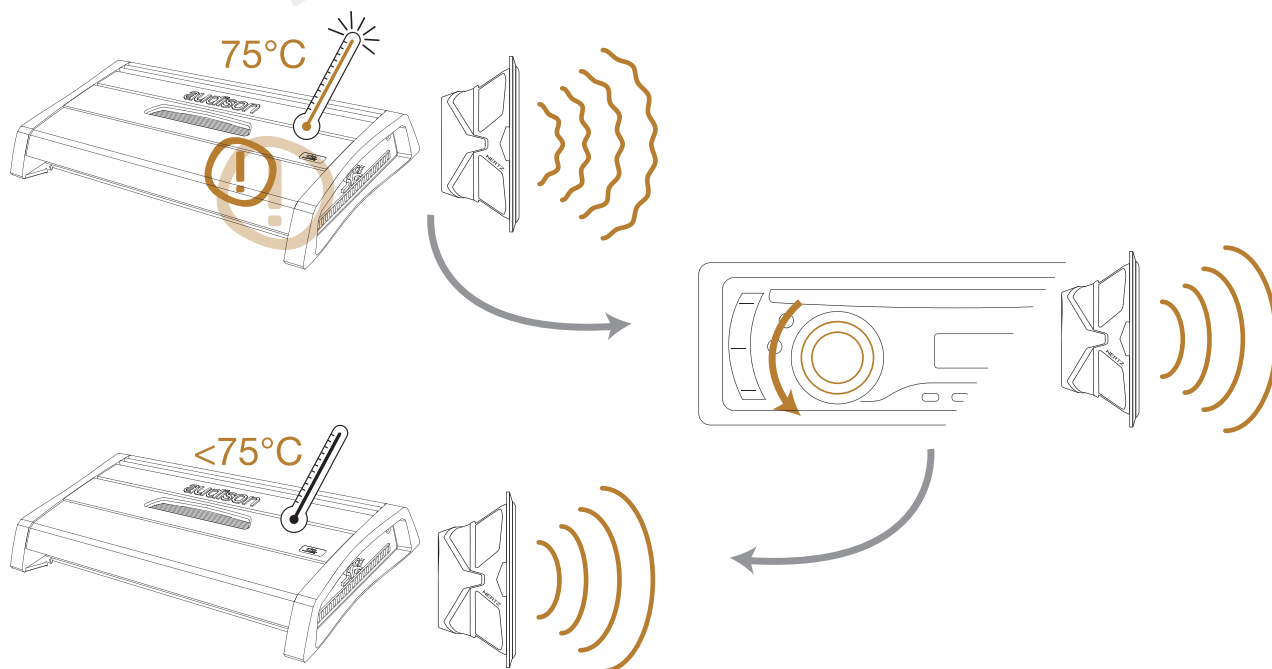

Technical Specifications

Power Supply

Voltage:	11÷15 VDC
Minimum idling current:	1.2 A
Idling current when off:	0.02 mA
Remote IN Voltage:	7÷15 VDC (1 mA)
Remote OUT Voltage:	12 VDC (15 mA)
Internal Fuse (AFS):	40 A
Consumption @ 14.4 VDC (Max Musical Power):	39 A

Inputs/Outputs/Filters

Inputs	Pre / Speaker
Outputs	Pre
Front Ch Filter	Bypass / Hi-pass: 50 ÷ 220 Hz @ 12 dB/Oct.
SUB Ch Filter	Bypass / Lo-pass: 50 ÷ 220 Hz @ 24 dB/Oct.
Boost 50 Hz	OFF / +2dB / +4 dB @ 50 Hz
Sub remote volume control	OFF / 0dB / +6dB

Size

BxLxH mm / inches	216 x 470 x 56 / 8 ^{11/2} x 18 ^{11/2} x 2 ^{11/4}
Weight (kg/lb)	4,55 / 10.03

Amplifier stage

Distortion Front Ch -THD (1 kHz@4Ω):	0.03 %
Distortion SUB Ch -THD (100 Hz@4Ω):	0.04 %
Bandwidth Front / SUB Ch (-3 dB):	5 ÷ 50k / 5 ÷ 500 Hz
S/N ratio (A weighted@1V):	98 dB
Damping factor Front Ch (1 kHz@4Ω):	200
Damping factor SUB Ch (100 Hz@4Ω):	300
Pre-In sensitivity:	0.3 ÷ 5 V
Speaker-In sensitivity:	1 ÷ 15 V
Pre-In impedance:	15k Ω
Speaker-In impedance:	100 Ω
Load impedance (MIN):	
3 Ch	3 x 2 Ω
Output power (RMS) @14.4 VDC; THD 1%:	
3 Ch	75 W x 2 (4Ω) + 270 W x 1 (4Ω)
3 Ch	65 W x 2 (4Ω) + 380 W x 1 (2Ω)
3 Ch	110 W x 2 (2Ω) + 250 W x 1 (4Ω)
3 Ch	95 W x 2 (2Ω) + 350 W x 1 (2Ω)

CEA 2006-A RATINGS

OUTPUT Power (4Ω, ≤1% THD+N, 14.4 Volts):	68 W x 2 Ch + 260 W x 1 Ch
S/N ratio (ref. 1W output):	
60 W / 260 W Channels:	79 dBA / 78 dBA

