



PHONES

(044) 360-7-130
(050) 336-0-130
(063) 788-0-130
(067) 233-0-130
(068) 282-0-130

130 Internet store of autogoods

COM.UA



ICQ
294-0-130
597-0-130

SKYPE
km-130

CAR RECEIVERS — Receivers • Media receivers and stations • Native receivers • CD/DVD changers • FM-modulators/USB adapters • Flash memory • Facia plates and adapters • Antennas • Accessories | CAR AUDIO — Car audio speakers • Amplifiers • Subwoofers • Processors • Crossovers • Headphones • Accessories | TRIP COMPUTERS — Universal computers • Model computers • Accessories | GPS NAVIGATORS — Portable GPS • Built-in GPS • GPS modules • GPS trackers • Antennas for GPS navigators • Accessories | VIDEO — DVR • TV sets and monitors • Car TV tuners • Cameras • Videomodules • Transcoders • Car TV antennas • Accessories | SECURITY SYSTEMS — Car alarms • Bike alarms • Mechanical blockers • Immobilizers • Sensors • Accessories | OPTIC AND LIGHT — Xenon • Bixenon • Lamps • LED • Stroboscopes • Optic and Headlights • Washers • Light, rain sensors • Accessories | PARKTRONICS AND MIRRORS — Rear parktronic • Front parktronic • Combined parktronic • Rear-view mirrors • Accessories | HEATING AND COOLING — Seat heaters • Mirrors heaters • Screen-wipers heaters • Engine heaters • Auto-refrigerators • Air conditioning units • Accessories | TUNING — Vibro-isolation • Noise-isolation • Tint films • Accessories | ACCESSORIES — Radar-detectors • Handsfree, Bluetooth • Windowlifters • Compressors • Beeps, loudspeakers • Measuring instruments • Cleaners • Carsits • Miscellaneous | MOUNTING — Installation kits • Upholstery • Grilles • Tubes • Cable and wire • Tools • Miscellaneous | POWER — Batteries • Converters • Start-charging equipment • Capacitors • Accessories | MARINE AUDIO AND ELECTRONICS — Marine receivers • Marine audio speakers • Marine subwoofers • Marine amplifiers • Accessories | CAR CARE PRODUCTS — Additives • Washer fluid • Care accessories • Car polish • Flavors • Adhesives and sealants | LIQUID AND OIL — Motor oil • Transmission oil • Brake fluid • Antifreeze • Technical lubricant



In store "130" you can find and buy almost all necessary goods for your auto in Kyiv and other cities, delivery by ground and postal services. Our experienced consultants will provide you with exhaustive information and help you to chose the very particular thing. We are waiting for you at the address

<http://130.com.ua>

SUB ENERGY WOOFER

ES F20.5 400 W



ULTRA flat

Technical Specifications



Component	Subwoofer	
Size	mm (inch)	200 (8")
Power handling W	peak	400
	cont. program	200
Impedance	Ω	4
Frequency response	Hz	32 ÷ 400
Sensitivity	dB/SPL	93
Outer Diameter	mm (inch)	209 (8" 1/4)
Mounting Diameter	mm (inch)	180 (7" 1/16)
Total Depth	mm (inch)	86 (3" 3/8)
Mounting Depth	mm (inch)	70 (2" 3/4)
Magnet size	mm (inch)	120 (4" 3/4)
Total Driver Displacement	l (ft³)	0,4 (0,018)
Weight of one component	kg (lb)	2,4 (5,28)
Voice Coil Diameter	mm (inch)	38 (1" 1/2)
Magnet	High density flux ferrite	
Cone	Water repellent pressed paper	
*X-mech	mm (inch)	12 (1/2")

* Xmech: maximum mechanic excursion; indicates the maximum linear motion range of the speaker in both directions.

Electro-Acoustic Parameters

D	mm	166
Xmax	mm	5
Re	Ohm	2,9
Fs	Hz	54
Vas	l	11,8
Mms	g	49,2
Cms	mm/N	0,18
BL	T m	10,6
Qts		0,40
Qes		0,42
Qms		6,88
Spl	dB	93

1. Ultra Flat design, for maximum installation flexibility.
2. Massive motor assembly, for perfect control under high power, high excursion conditions.
3. Water-repellent pressed paper cone.
4. Copper voice coil, wound on aluminium former, for startling thermal and mechanical capacity.
5. Back Vented Spider support, for perfect symmetry under high excursion and thermal dissipation.
6. Wide-wave, resin-bonded fiber spider for mechanical reliability and consistent parameters.
7. High current, tin-plated terminals.
8. Silver plated lead wires for maximum reliability and conductivity.
9. Basket and motor coupled and damped through special epoxy glue.
10. High thermal dissipation and magnetic permeability plates, providing constant, even flux.

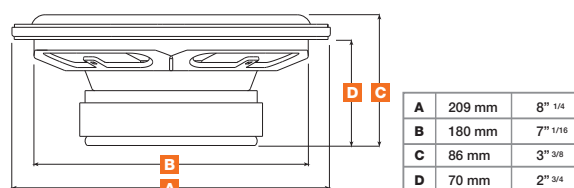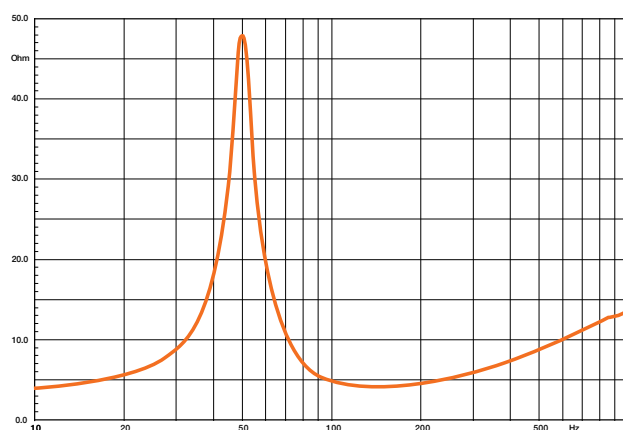

SUB energy WOOFER

ES F25.5 500 W



ULTRA flat

Technical Specifications



Component	Subwoofer	
Size	mm (inch)	250 (10")
Power handling W	peak	500
	cont. program	250
Impedance	Ω	4
Frequency response	Hz	30 ÷ 300
Sensitivity	dB/SPL	92
Outer Diameter	mm (inch)	256 (10" 1/16)
Mounting Diameter	mm (inch)	231 (9" 1/8)
Total Depth	mm (inch)	94 (3" 11/16)
Mounting Depth	mm (inch)	83 (3" 1/4)
Magnet size	mm (inch)	140 (5" 1/2)
Total Driver Displacement	l (ft ³)	0,7 (0,025)
Weight of one component	kg (lb)	3,3 (7,26)
Voice Coil Diameter	mm (inch)	60 (2" 3/8)
Magnet	High density flux ferrite	
Cone	Water repellent pressed paper	
*X-mech	mm (inch)	13 (1/2")

* Xmech: maximum mechanic excursion; indicates the maximum linear motion range of the speaker in both directions.

Electro-Acoustic Parameters

D	mm	215
Xmax	mm	6
Re	Ω	3
Fs	Hz	37
Vas	l	42,9
Mms	g	82,0
Cms	mm/N	0,23
BL	T m	10,4
Qts		0,48
Qes		0,52
Qms		5,58
Spl	dB	92

1. Ultra Flat design, for maximum installation flexibility.
2. Massive motor assembly, for perfect control under high power, high excursion conditions.
3. Water-repellent pressed paper cone.
4. Copper voice coil, wound on aluminium former, for startling thermal and mechanical capacity.
5. Back Vented Spider support, for perfect symmetry under high excursion and thermal dissipation.
6. Wide-wave, resin-bonded fiber spider for mechanical reliability and consistent parameters.
7. High current, tin-plated terminals.
8. Silver plated lead wires for maximum reliability and conductivity.
9. Basket and motor coupled and damped through special epoxy glue.
10. High thermal dissipation and magnetic permeability plates, providing constant, even flux.

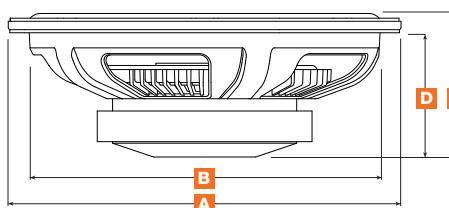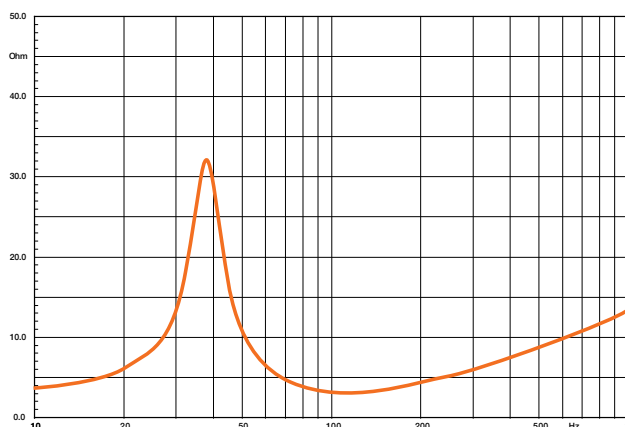

A	256 mm	10" 1/16
B	231 mm	9" 1/8
C	94 mm	3" 11/16
D	83 mm	3" 1/4