



PHONES

0 (800) 800 130
(050) 462 0 130
(063) 462 0 130
(067) 462 0 130

130
COM.UA

Internet store of
autogoods



SKYPE

km-130

CAR RECEIVERS — Receivers • Media receivers and stations • Native receivers • CD/DVD changers • FM-modulators/USB adapters • Flash memory • Facia plates and adapters • Antennas • Accessories |
CAR AUDIO — Car audio speakers • Amplifiers • Subwoofers • Processors • Crossovers • Headphones • Accessories | TRIP COMPUTERS — Universal computers • Model computers • Accessories |
GPS NAVIGATORS — Portable GPS • Built-in GPS • GPS modules • GPS trackers • Antennas for GPS navigators • Accessories | VIDEO — DVR • TV sets and monitors • Car TV tuners • Cameras • Videomodules
• Transcoders • Car TV antennas • Accessories | SECURITY SYSTEMS — Car alarms • Bike alarms • Mechanical blockers • Immobilizers • Sensors • Accessories | OPTIC AND LIGHT — Xenon • Bixenon • Lamps
• LED • Stroboscopes • Optic and Headlights • Washers • Light, rain sensors • Accessories | PARKTRONICS AND MIRRORS — Rear parktronic • Front parktronic • Combined parktronic • Rear-view mirrors
• Accessories | HEATING AND COOLING — Seat heaters • Mirrors heaters • Screen-wipers heaters • Engine heaters • Auto-refrigerators • Air conditioning units • Accessories | TUNING — Vibro-isolation
• Noise-isolation • Tint films • Accessories | ACCESSORIES — Radar-detectors • Handsfree, Bluetooth • Windowlifters • Compressors • Beeps, loudspeakers • Measuring instruments • Cleaners • Car seats
• Miscellaneous | MOUNTING — Installation kits • Upholstery • Grilles • Tubes • Cable and wire • Tools • Miscellaneous | POWER — Batteries • Converters • Start-charging equipment • Capacitors
• Accessories | MARINE AUDIO AND ELECTRONICS — Marine receivers • Marine audio speakers • Marine subwoofers • Marine amplifiers • Accessories | CAR CARE PRODUCTS — Additives • Washer fluid •
Care accessories • Car polish • Flavors • Adhesives and sealants | LIQUID AND OIL — Motor oil • Transmission oil • Brake fluid • Antifreeze • Technical lubricant



In store "130" you can find and buy almost all necessary goods for your auto in Kyiv and other cities, delivery by ground and postal services. Our experienced consultants will provide you with exhaustive information and help you to choose the very particular thing. We are waiting for you at the address

<https://130.com.ua>

ALPINE®

ALPINE ELECTRONICS, INC.
Tokyo office:
1-1-8 Nishi-Godanda, Shinagawa-ku,
Tokyo 141-8501, Japan
Phone: 81(3) 3494-1101

ALPINE ELECTRONICS MARKETING, INC.
1-7, Yabigayashi-Kamachi, Chiyu
Tokyo 145-0067, Japan
Tel: 03-5499-4531

ALPINE ELECTRONICS OF AMERICA, INC.
19145 Gramercy Place
Torrance, California 90501 U.S.A.
Tel: 1(310)325-8000

ALPINE ELECTRONICS GmbH
Wilhelm-Wagenfeld-Strasse 1-3,
80607 Munich,
Germany
Phone: 49(0)89-324264-0

ALPINE ELECTRONICS FRANCE S.A.R.L.
184 allée des Erables
CS 32016 - Villaparte
95 945 Rosisy C/O cedex
FRANCE
Phone: +33 1 46 63 89 89

ALPINE ITALIA S.p.A.
Viale C. Colombo 8,
20090 Trazzano Sul
Napoleo (MI), Italy
Tel.: 02-484781


ALPINE ELECTRONICS OF U.K., LTD.
Alpine House Earlspace Business Park,
Fletcherhead Highway,
Coventry CV4 9TW, U.K.
Phone: 44-2476-719500

ALPINE ELECTRONICS OF
AUSTRALIA PTY. LTD.
161-165 Phirose Highway, Hallam
Victoria 3803, Australia
Tel.: 03-8787-1200

ALPINE ELECTRONICS DE ESPAÑA, S.A.
Paseo de Garmiro 36, Pabellón, 32
01013 Vitoria (Alava),
4900 133, Spain
Tel.: 945-263688

ALPINE ELECTRONICS (CHINA) CO., LTD.
R2-4F, China Merchants Tower
No.115 Jiajiang Street Chaoyang District,
Beijing 100022, China
Phone:86(10)2566-0308

Printed in CHINA



Information on Disposal of Old Electrical and Electronic Equipment and Battery (applicable for countries that have adopted separate waste collection systems)

If you want to dispose this product, do not mix it with general household waste. There is a separate collection system for used electronic products in accordance with legislation that requires proper treatment, recovery and recycling. Contact your local authority for details in locating a recycle facility nearest to you. Proper recycling and waste disposal will help conserve resources whilst preventing detrimental effects on our health and the environment.

Information sur le traitement des Déchets Electriques et Electroniques (DEEE), pour les pays ayant adoptés un traitement séparés de ces déchets

Si vous possédez des appareils Electriques ou Electroniques usagés, ne les jetez pas dans le système général. Conformément à la Directive Européenne, transposée dans votre pays, il existe un système séparé de recyclage et de traitement de ces déchets. Veuillez contacter l'administration locale afin de prendre connaissance du lieu de recyclage et de traitement le plus proche de chez vous. Ce système est destiné à protéger l'environnement.

ALPINE®


X-Series SUBWOOFER
HAUT-PARLEUR D'EXTRÊMES GRAVES X-Series
APPLICATION GUIDE
GUIDE D' APPLICATION

X-W12D4


12 Inch Dual Voice Coil Subwoofer (4Ω)+(4Ω)
Haut-parleur d'extrêmes graves à double bobine 12 po (4Ω)+(4Ω)

X-W10D4


10 Inch Dual Voice Coil Subwoofer (4Ω)+(4Ω)
Haut-parleur d'extrêmes graves à double bobine 10 po (4Ω)+(4Ω)

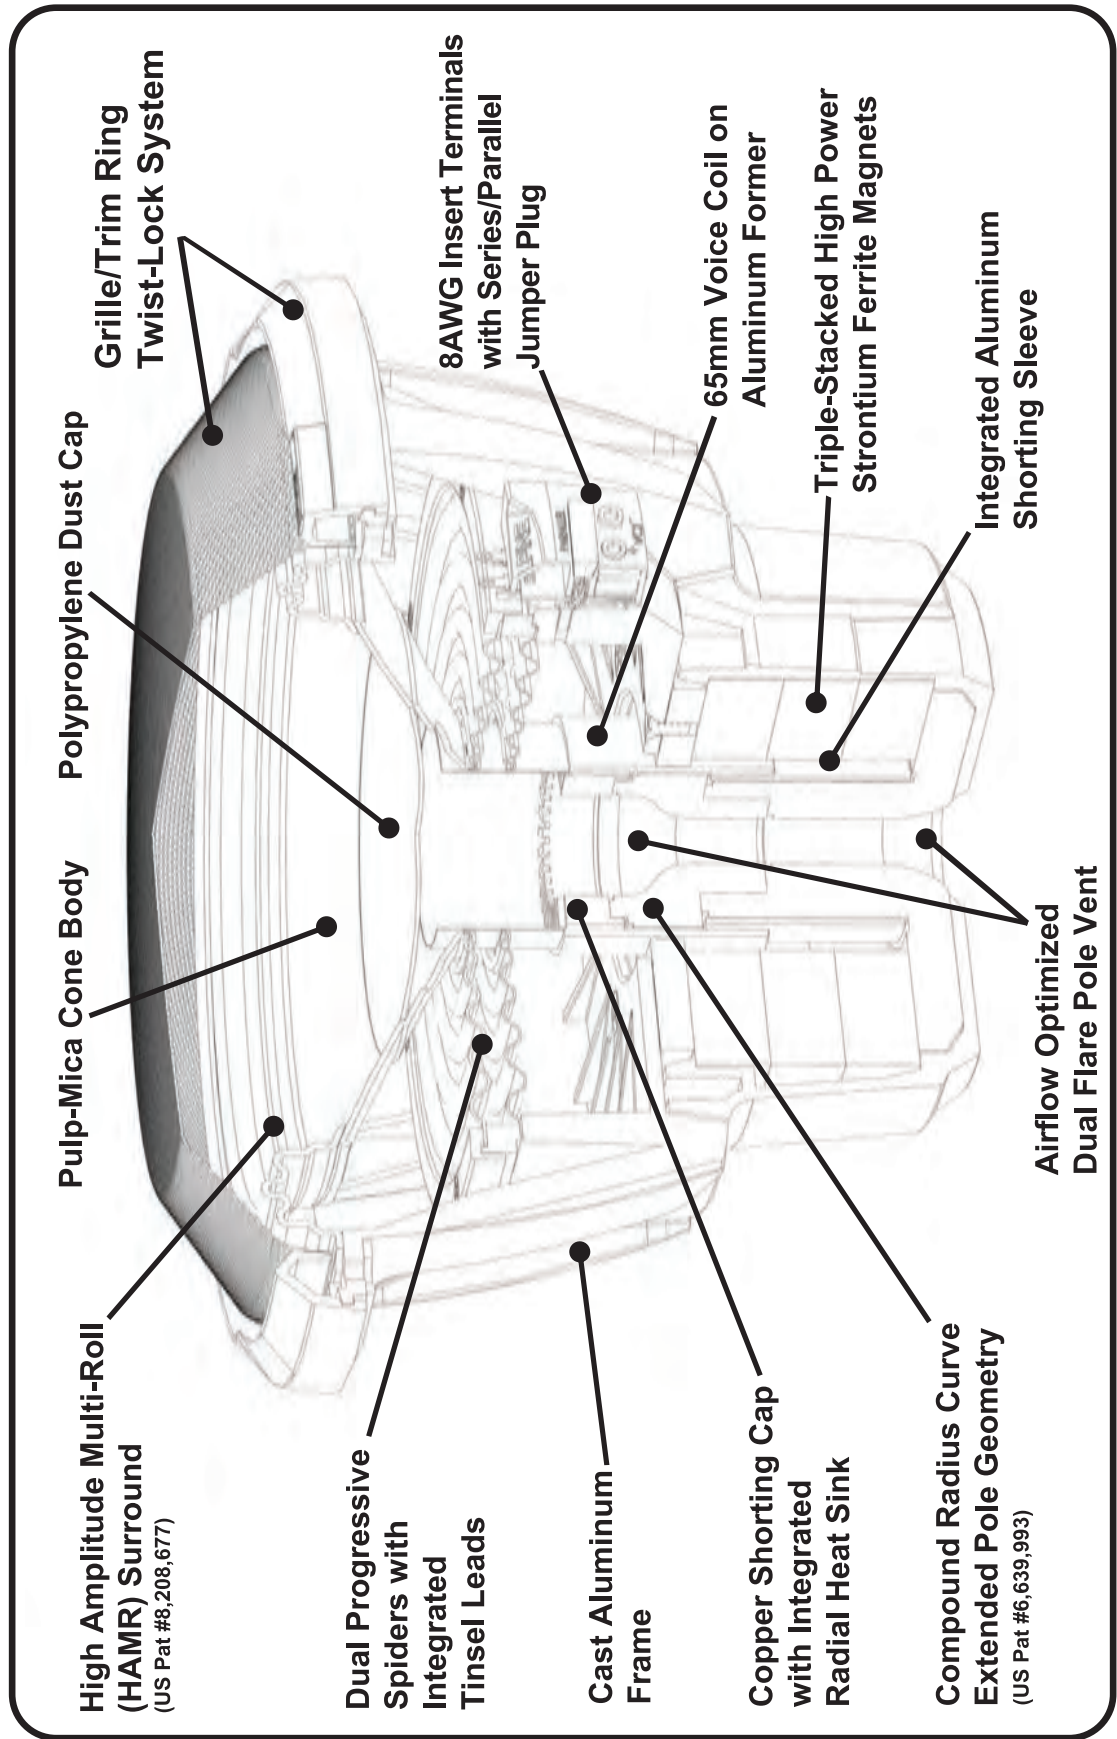

X-W12D4

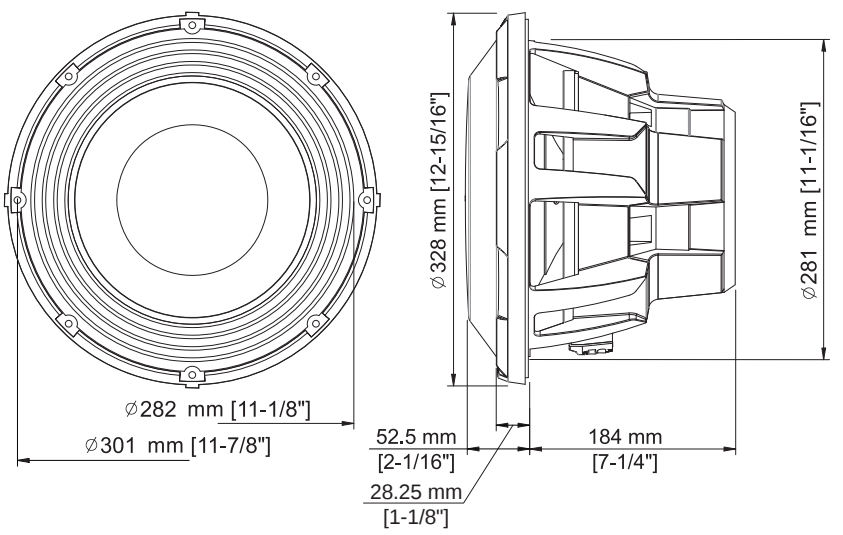

X-W10D4

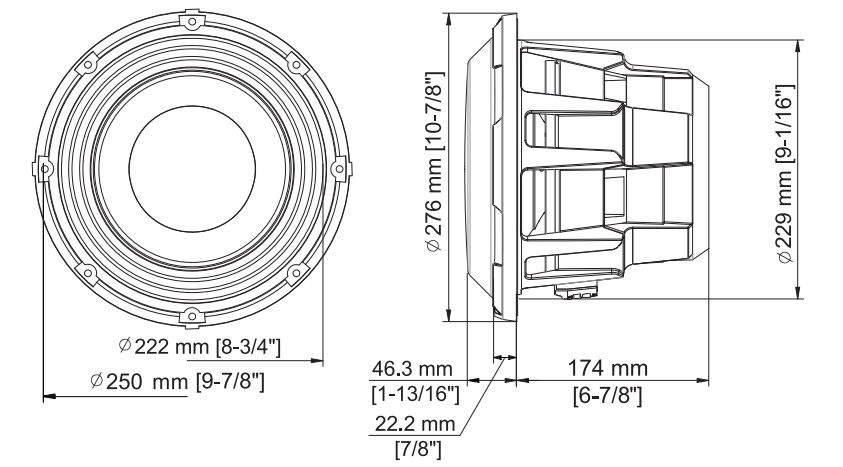


Single folding: 172 x 246 mm

General Specifications		
Size	Taille	
Frequency Response	Réponse en Fréquence	
Power Range	Plage de Puissance	
Power Handling	Puissance Admissible	
Magnet Weight	Poids de l'aimant	
Voice Coil Diameter	Diamètre de la bobine	
Thiele-Small Parameters		
Sensitivity (1W/1m)	Sensibilité (1W/1m)	SPL
DC Resistance	Résistance DC	Re
Inductance	Inductance	Le
Free Air Resonance	Résonance à l'air libre	Fs
Equivalent Stiffness	Raideur équivalente	Vas
Mechanical Q	Q Mécanique	Qms
Electrical Q	Q Électrique	Qes
Total Q	Q Total	Qts
Cone Area	Surface du diaphragme	Sd
Linear Excursion	Déplacement Linéaire	Xmax (1-way)
Mechanical Travel	Déplacement Mécanique	Xmech (P-P)

Note: Specifications subject to change without notice

X-Series	
X-W10D4	X-W12D4
4Ω+4Ω	4Ω+4Ω
10"	12"
26Hz-200Hz	23Hz-200Hz
650W-900W RMS (efficace)	
900W RMS (efficace) / 2700W PEAK (de crête)	
174 oz (x3)	
65.5 mm (2.6")	
83.3 dB	84.3 dB
3.0Ω + 3.0Ω	3.6Ω+3.6Ω
3.92 mH	4.42 mH
31 Hz	27 Hz
23 L	56 L
4.28	5.63
0.49	0.62
0.45	0.56
305 cm²	475 cm²
24 mm	
82 mm	82 mm

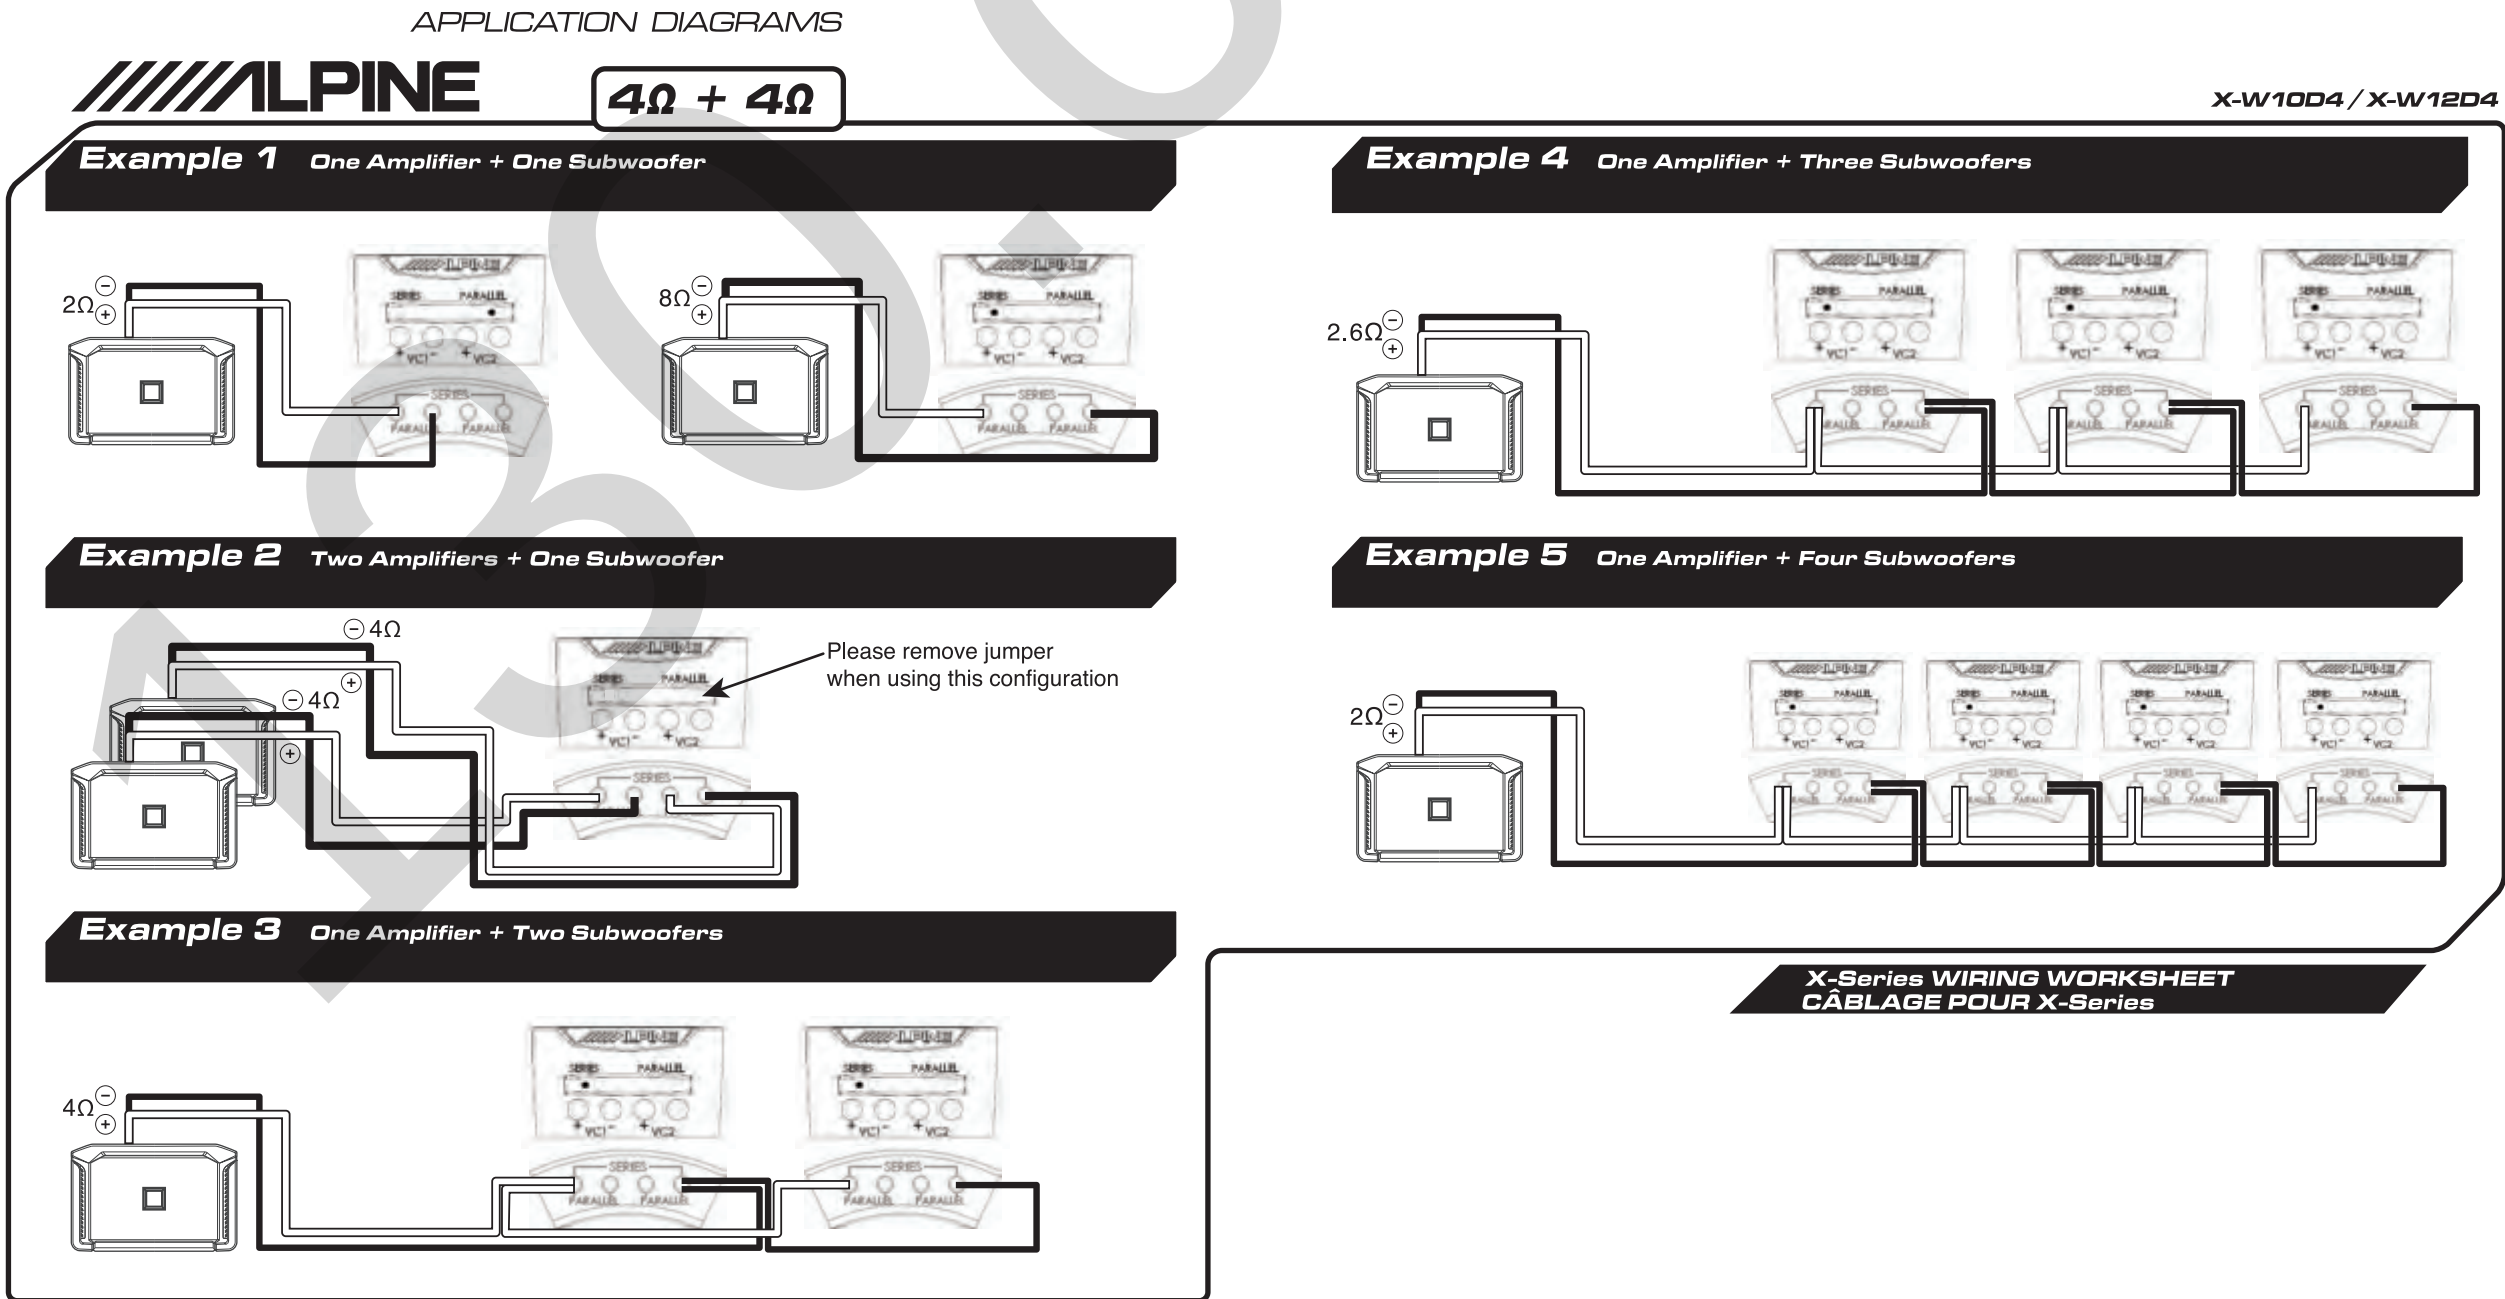

		X-W10D4	X-W12D4
Sealed Box Range	Net Internal Volume	0.4-0.75 ft³	0.4-1.25 ft³
	External Dimensions (H x W X D)	12.5" x 12.5" x 11"	14" x 14" x 12.25"
	Gross Internal Volume	0.67 ft³	0.97 ft³
	Net Internal Volume	0.55 ft³	0.85 ft³
Recommended Sealed Box	F3, Qtc	42Hz, 0.75	36Hz, 0.99
	Net Internal Volume	0.85-1.75 ft³	1.0-2.0 ft³
	Fb, Tuning	33-39 Hz	30-36 Hz
Vented Box Range	External Dimensions (H x W X D)	13" x 23.5" x 13"	14" x 23.5" x 14"
	Gross Internal Volume	1.68 ft³	1.98 ft³
	Vent Area (W x H)	15.0 in² (3.75" x 4")	15.0 in² (3.75" x 4")
	Vent Length	18"	18"
	Vent Displacement	0.21 ft³	0.21 ft³
	Net Internal Volume (Vb)	1.45 ft³	1.65 ft³
	F3, ripple, Fb	28Hz, 5.6dB, 35Hz	28Hz, 5.7dB, 33Hz

Notes:
1) Recommended enclosure net internal volume is based upon 3/4" (19mm) MDF enclosure construction.
2) Consult the table below for alternative enclosure net internal volume calculation.

Front Mount Displacement* (magnet in)	-0.120 ft³	-0.122 ft³
Reverse Mount Added Volume* (magnet out)	+0.030 ft³	+0.035 ft³

*Based upon 3/4" (19mm) baffle thickness, with opening cut approximately to gasket inner diameter

		X-W10D4	X-W12D4
Gamme Box Sealed	Volume intérieur net	0.4-0.75 pi³	0.4-1.25 pi³
	Dimensions de la boîte extérieures	12.5 po x 12.5 po x 11 po	14 po x 14 po x 12.25 po
	Volume intérieur brut	0.67 pi³	0.97 pi³
	Volume intérieur Net ***	0.55 pi³	0.85 pi³
Recommended Boîte Scellée	F3 Qtc	42Hz, 0.75	36Hz, 0.99
	Volume intérieur net	0.85-1.75 pi³	1.0-2.0 pi³
	Fb, mise au point	33-39 Hz	30-36Hz
Gamme charge bass-reflex	Dimensions de la boîte extérieures	13 po x 23.5 po x 13 po	14 po x 23.5 po x 14 po
	Volume intérieur brut	1.68 pi³	1.98 pi³
	Aire de l'évent (W x H)	15.0 po² (3.75 po x 4 po)	15.0 in² (3.75 po x 4 po)
	Longueur de l'évent	18 po	18 po
	Déplacement de l'évent	0.21 pi³	0.21 pi³
	Volume intérieur Net (Vb)***	1.45 pi³	1.65 pi³
	F3, crête, Fb	28Hz, 5.6dB, 35Hz	28Hz, 5.7dB, 33Hz

Notes:
1) Recommandé encoite volume net interne est basée sur 3/4" (19mm) de construction boîtier en MDF.
2) Consulter le tableau ci-dessous pour le calcul de fillet d'enclos alternative volume interne.

Avant le déplacement du Mont * (aimant)	-0.120 pi³	-0.122 pi³
Inverser Volume mont Ajouté * (des aimants)	+0.030 pi³	+0.035 pi³

* Sur la base de l'épaisseur du déflecteur 3/4" (19mm), avec une ouverture coupée à peu près à joint diamètre intérieur