



PHONES

0 (800) 800 130
(050) 462 0 130
(063) 462 0 130
(067) 462 0 130

130
COM.UA

Internet store of
autogoods



SKYPE

km-130

CAR RECEIVERS — Receivers • Media receivers and stations • Native receivers • CD/DVD changers • FM-modulators/USB adapters • Flash memory • Facia plates and adapters • Antennas • Accessories |
CAR AUDIO — Car audio speakers • Amplifiers • Subwoofers • Processors • Crossovers • Headphones • Accessories | TRIP COMPUTERS — Universal computers • Model computers • Accessories |
GPS NAVIGATORS — Portable GPS • Built-in GPS • GPS modules • GPS trackers • Antennas for GPS navigators • Accessories | VIDEO — DVR • TV sets and monitors • Car TV tuners • Cameras • Videomodules
• Transcoders • Car TV antennas • Accessories | SECURITY SYSTEMS — Car alarms • Bike alarms • Mechanical blockers • Immobilizers • Sensors • Accessories | OPTIC AND LIGHT — Xenon • Bixenon • Lamps
• LED • Stroboscopes • Optic and Headlights • Washers • Light, rain sensors • Accessories | PARKTRONICS AND MIRRORS — Rear parktronic • Front parktronic • Combined parktronic • Rear-view mirrors
• Accessories | HEATING AND COOLING — Seat heaters • Mirrors heaters • Screen-wipers heaters • Engine heaters • Auto-refrigerators • Air conditioning units • Accessories | TUNING — Vibro-isolation
• Noise-isolation • Tint films • Accessories | ACCESSORIES — Radar-detectors • Handsfree, Bluetooth • Windowlifters • Compressors • Beeps, loudspeakers • Measuring instruments • Cleaners • Carsits
• Miscellaneous | MOUNTING — Installation kits • Upholstery • Grilles • Tubes • Cable and wire • Tools • Miscellaneous | POWER — Batteries • Converters • Start-charging equipment • Capacitors
• Accessories | MARINE AUDIO AND ELECTRONICS — Marine receivers • Marine audio speakers • Marine subwoofers • Marine amplifiers • Accessories | CAR CARE PRODUCTS — Additives • Washer fluid •
Care accessories • Car polish • Flavors • Adhesives and sealants | LIQUID AND OIL — Motor oil • Transmission oil • Brake fluid • Antifreeze • Technical lubricant




In store "130" you can find and buy almost all necessary goods for your auto in Kyiv and other cities, delivery by ground and postal services. Our experienced consultants will provide you with exhaustive information and help you to chose the very particular thing. We are waiting for you at the address

<https://130.com.ua>

USER'S MANUAL

Инструкция по эксплуатации manual к усилителю
ARTONE PMS-3180 | PMS-3300 | PMS-1030D | PMS-1060D

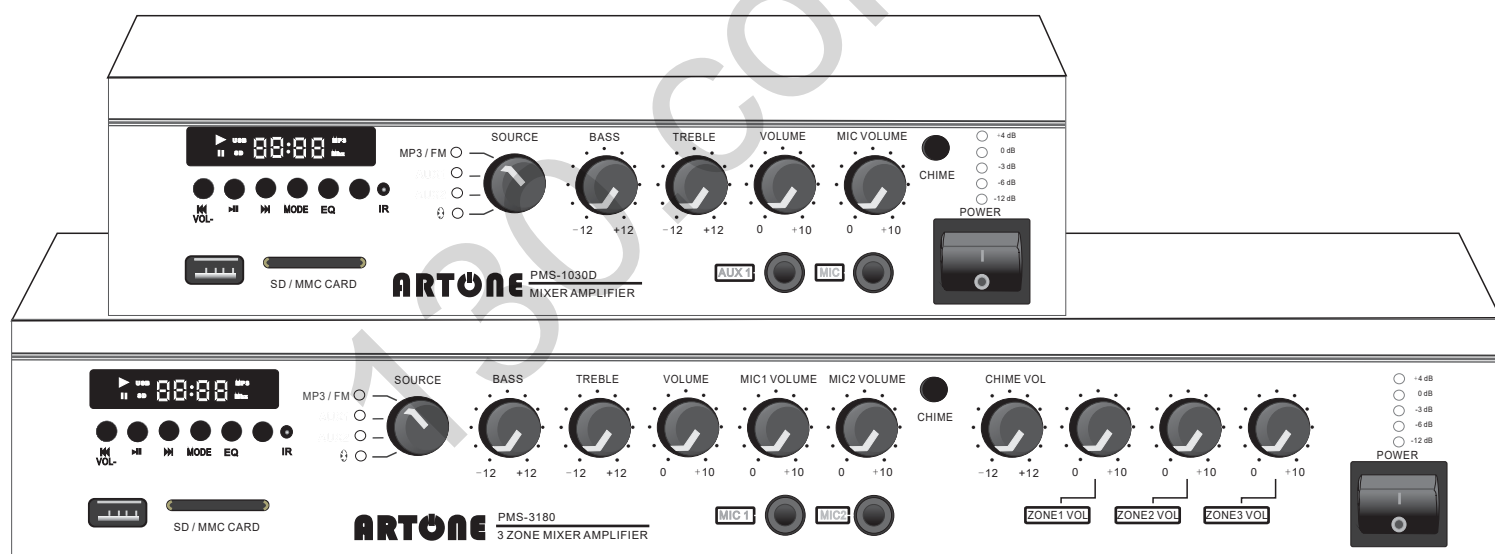

Pre caution



The lightning flash with arrowhead symbol, within an equilateral triangle is intended to alert the user to the presence of uninsulated “dangerous voltage” within the product’s enclosure that maybe of sufficient magnitude to constitute a risk of electric shock to persons.

1. Read these instructions.
2. Keep these instructions.
3. Heed all warnings.
4. Follow all instructions.
5. Do not use this apparatus near water.
6. Clean only with dry cloth.
7. Do not cover any ventilation openings.
8. Do not install near heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
9. Do not defeat the safety purpose of the polarized or the grounding-type plug.
10. Protect the power cord from being walked on or pinched particularly at plugs, convenience receptacles, and the point where they exit from the apparatus.
11. Only use attachments/accessories specified by the manufacturer.
12. Use only with the cart, tripod, bracket, or table specified by the manufacturer, or sold with the apparatus. When a cart is used, use caution when moving the cart/apparatus combination to avoid injury from tip-over.
13. Unplug this apparatus during lightning storms or when unused for a long period of time.
14. Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as power supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.
15. Do not expose this equipment to dripping or splashing and ensure that no objects filled with liquids, such as vases, are placed on the equipment.
16. To completely disconnect this equipment from the AC mains, disconnect the power supply cord plug from the AC receptacle.
17. The mains plug of the power supply cord shall remain readily operable.

Product Introduction

ARTONE Mini Mixer Amplifier PMS-1030D and PMS-1060D are product use for commercial audio system. The product include built-in audio sources USB, SD card, FM tuner and Bluetooth, 4 audio sources switchable from USB/SD/Tuner, AUX1, AUX2 and Bluetooth. It is designed in modern style with aluminium front panel, made in reliable quality for commercial applications, and delivers high level sound performance. The amplifiers can be set as standalone audio system or part of large PA system, it is ideal to adopt for various places like shops, supermarkets, restaurants, church, offices, schools, hospital, etc.

Features

- RMS 30W and 60W power;
- 4~16 ohm, 70V, 100V speaker output;
- Built-in USB, SD card, FM tuner and Bluetooth receiver;
- Audio switchable from USB/SD card/FM tuner, AUX1, AUX2 and Bluetooth audio sources;
- 6 EQ modes for Mp3 audio source;
- FM tuner frequency 88~108Hz;
- AC220~230V / 110~120V & DC12V power supply;
- Volume control for treble, bass, main volume, MIC;
- 1 MIC input jack 6.3mm;
- Chime reminder;
- LED display for MP3/FM player;
- IR remote controller;
- LED indicators for audio select and play;
- Professional and modern design;
- High temperature, over load, short circuit protection.


Front View



1. Power ON / OFF switch
2. LED indicators
3. Audio input selector (MP3/FM Tuner, AUX1, AUX2 and Bluetooth)
4. MIC volume adjuster
5. MIC input jack 6.3mm
6. AUX1 input jack 6.3mm
7. Bass volume control
8. Treble volume control
9. USB slot for Mp3 player
10. SD card slot for Mp3 player

11. IR receiver for MP3/FM player
12. MP3/FM Player display
13. MP3/FM mode switch
14. Play and pause control for MP3/FM player
15. Previous Mp3 track or tuner station
16. Next Mp3 track or tuner station
17. EQ mode adjuster for MP3
18. Mp3 loop control
19. Main volume control
20. Chime button

Rear View

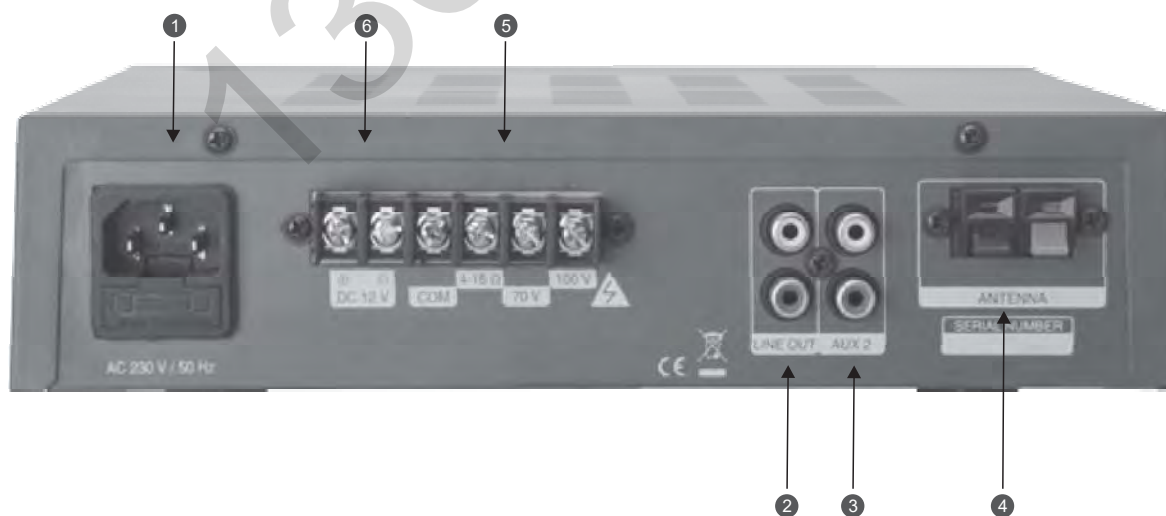

1. Power supply 110~120V 60Hz or 200~230V 60Hz
2. Line out for audio output to other amplifier or other device
3. AUX2 audio input, and select from front panel
4. FM tuner antenna

5. Speaker terminal output at 4-16 ohm, 70V, 100V
6. DC 12V power supply input


Product Introduction

ARTONE 3 Zone Mixer Amplifier PMS-3180 and PMS-3300 are product use for commercial audio system. The product include built-in audio sources USB, SD card, FM tuner and Bluetooth, 4 audio sources switchable from USB/SD/Tuner, AUX1, AUX2 and Bluetooth. It is designed in modern style with aluminium front panel, made in reliable quality for commercial applications, and delivers high level sound performance. The amplifiers can be set as standalone audio system or part of large PA system, it is ideal to adopt for various places like shops, supermarkets, restaurants, church, offices, schools, hospital, etc.

Features


- RMS180W and 300W power;
- 4~16 ohm, 70V, 100V speaker output;
- Built-in USB, SD card, FM tuner and Bluetooth receiver;
- Audio switchable from USB/SD card/FM tuner, AUX1, AUX2 and Bluetooth audio sources;
- 6 EQ modes for Mp3 audio source;
- FM tuner frequency 88~108Hz;
- 3 zone individual volume gain control independently;
- Volume control for treble, bass, main volume, chime, MIC1, MIC2;
- 2 MIC inputs jack 6.3mm;
- 1 priority input with gain control;
- Chime reminder and volume adjustable;
- LED display for MP3/FM player;
- IR remote controller;
- LED indicators for audio select and play;
- Professional and modern design;
- High temperature, over load, short circuit protection.

Front View

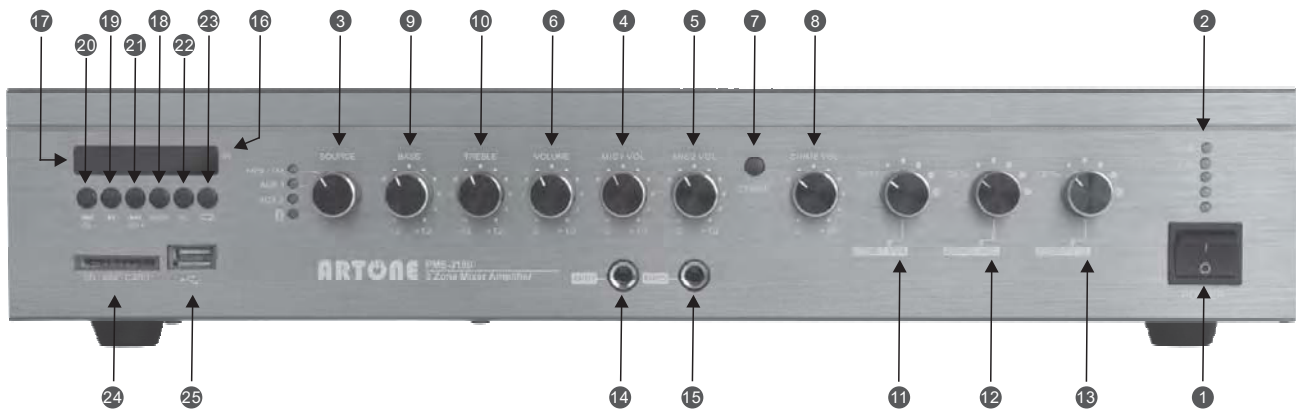

1. Power ON / OFF switch
2. LED indicators
3. Audio input selector (MP3/FM Tuner, AUX1, AUX2 and Bluetooth)
4. MIC1 volume adjustor
5. MIC2 volume adjustor
6. Main volume adjustor
7. Chime button, reminder before paging or music play
8. Chime volume adjustor
9. Bass volume control
10. Treble volume control
11. Volume control for zone 1
12. Volume control for zone 2
13. Volume control for zone 3
14. MIC1 input jack 6.3mm
15. MIC2 input jack 6.3mm
16. IR receiver for MP3/FM player
17. MP3/FM Player display
18. MP3/FM mode switch
19. Play and pause control for MP3/FM player
20. Previous Mp3 track or tuner station
21. Next Mp3 track or tuner station
22. EQ mode adjustor for MP3
23. Mp3 loop control
24. SD card slot for Mp3 player
25. USB slot for Mp3 player


Rear View

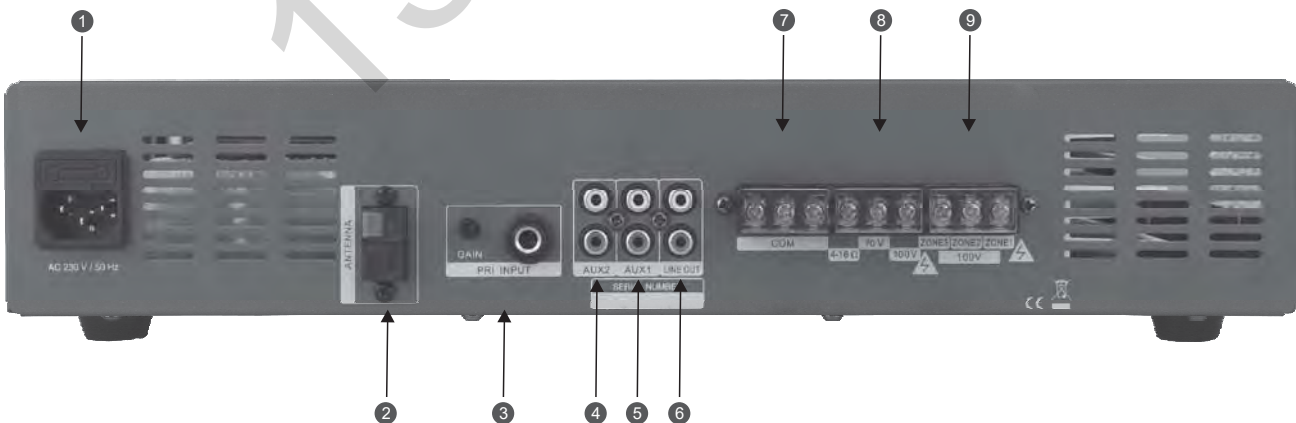

1. Power supply 110~120V 60Hz or 200~230V 60Hz
2. FM tuner antenna
3. PRI INPUT for top priority input of audio, and gain control
4. AUX2 audio input, and select from front panel
5. AUX1 audio input, and select from front panel
6. Line out for audio output to other amplifier or other device
7. COM speaker terminal
8. All zones output at 4-16 ohm, 70V, 100V
9. Zone1, zone2, zone3 speaker terminals

Remote Controller

- 1. Power - remote control for ON / OFF of Mp3 player
- 2. Mode - switch from USB, SD card and FM tuner
- 3. U/SD - USB and SD card switch
- 4. + / - volume control for MP3/FM source
- 5. mute the audio of MP3/FM source
- 6. EQ - 6 preset play modes
- 7. play and pause control for MP3/FM source
- 8. switch to previous audio file
- 9. switch to next audio file of MP3/FM source
- 10. play and repeat
- 11. audio track or tuner station select

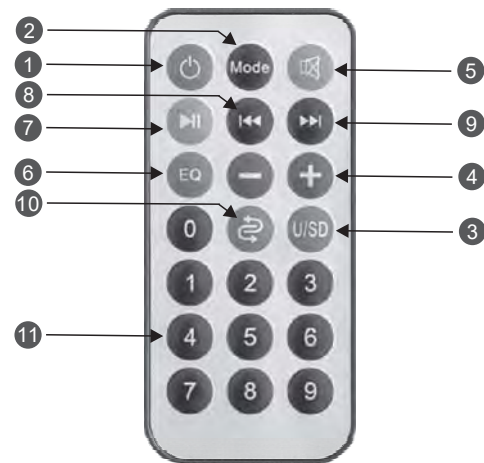

Additional Instruction

FM Tuner search radio station by press button for 3 seconds, the device will search radio signal and save the stations automatically, user is able to switch or change different tuner stations by press and button after all stations searched and saved, or use the digits on remote to select tuner stations.

Take notice of using Bluetooth player, please switch the SOURCE input to “” (the 4th source input) first, use the Bluetooth audio source (smart cell phone or any other device with Bluetooth function) search Bluetooth signal of “BL3221”, and use password of “0000” to connect audio device to play.

Specification

Model No.	PMS-1030D	PMS-1060D	PMS-3180	PMS-3300
Rated Power	30W / Max 60W	60W / Max 120W	180W / Max 300W	300W / Max 500W
Built-in Audio	USB, SD card, Mp3 Player, FM Tuner, Bluetooth			
Speaker Output	4~16 ohm, 70V, 100V			
Input Sensitivity	Mic: 5mV/600Ω unbalanced 6.3mm phone jack inputAUX:350mV/10KΩ RCA input			
Frequency Response	40~18KHz (+1dB, -1dB)			
S/N Ratio	Mic: 66dB / AUX: 80dB			
THD	Less than 0.1% at 1KHz, 1/3 rated power			
Protection	High temp, overload, short circuit			
Power Supply	AC 220~240V or 110~120V 60Hz & DC12V		AC 220~240V 60Hz or 110~120V 60Hz	
Size	240 x 270 x 70 mm		485 x 380 x 80 mm	
Weight	4.9 kg	6.2 kg	12 kg	16.5 kg

*Thanks for your purchase !
Please contact our dealer or our company if
any information or assistance may needed.*

у n

Dealer: Кликните на прямоугольник для
перехода в магазин:



Поставщик:
ИП Семенов
⇐ SEMENOVIP.RU

Due to continuous improvement, the product may be updated without notification.