



PHONES

0 (800) 800 130
(050) 462 0 130
(063) 462 0 130
(067) 462 0 130

130
COM.UA

Internet store of
autogoods



SKYPE

km-130


CAR RECEIVERS — Receivers • Media receivers and stations • Native receivers • CD/DVD changers • FM-modulators/USB adapters • Flash memory • Facia plates and adapters • Antennas • Accessories |
CAR AUDIO — Car audio speakers • Amplifiers • Subwoofers • Processors • Crossovers • Headphones • Accessories | TRIP COMPUTERS — Universal computers • Model computers • Accessories |
GPS NAVIGATORS — Portable GPS • Built-in GPS • GPS modules • GPS trackers • Antennas for GPS navigators • Accessories | VIDEO — DVR • TV sets and monitors • Car TV tuners • Cameras • Videomodules
• Transcoders • Car TV antennas • Accessories | SECURITY SYSTEMS — Car alarms • Bike alarms • Mechanical blockers • Immobilizers • Sensors • Accessories | OPTIC AND LIGHT — Xenon • Bixenon • Lamps
• LED • Stroboscopes • Optic and Headlights • Washers • Light, rain sensors • Accessories | PARKTRONICS AND MIRRORS — Rear parktronic • Front parktronic • Combined parktronic • Rear-view mirrors
• Accessories | HEATING AND COOLING — Seat heaters • Mirrors heaters • Screen-wipers heaters • Engine heaters • Auto-refrigerators • Air conditioning units • Accessories | TUNING — Vibro-isolation
• Noise-isolation • Tint films • Accessories | ACCESSORIES — Radar-detectors • Handsfree, Bluetooth • Windowlifters • Compressors • Beeps, loudspeakers • Measuring instruments • Cleaners • Carsits
• Miscellaneous | MOUNTING — Installation kits • Upholstery • Grilles • Tubes • Cable and wire • Tools • Miscellaneous | POWER — Batteries • Converters • Start-charging equipment • Capacitors
• Accessories | MARINE AUDIO AND ELECTRONICS — Marine receivers • Marine audio speakers • Marine subwoofers • Marine amplifiers • Accessories | CAR CARE PRODUCTS — Additives • Washer fluid •
Care accessories • Car polish • Flavors • Adhesives and sealants | LIQUID AND OIL — Motor oil • Transmission oil • Brake fluid • Antifreeze • Technical lubricant



In store "130" you can find and buy almost all necessary goods for your auto in Kyiv and other cities, delivery by ground and postal services. Our experienced consultants will provide you with exhaustive information and help you to chose the very particular thing. We are waiting for you at the address


<https://130.com.ua>

MP3 Module

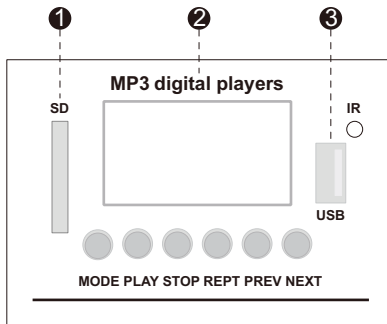

- ① SD Card Slot
Built-in player will read music once the card is inserted.
- ② USB Input
Built-in player will read music once the USB flash drive is inserted.
- ③ LCD Display
Mode Status will be shown on the display.


Function Buttons

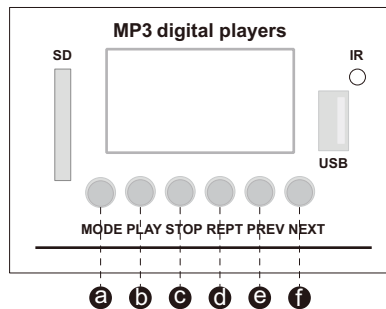


- a. **MODE**
Press "Mode" button to switch between Bluetooth, FM, USB and SD mode.
Bluetooth Mode: Press "Mode" to enter. Switch on your Bluetooth and search for the "Bluetooth" to connect it to your device.
FM Mode: Press "Mode" to enter. Press "PLAY" to auto search and save the channels.
- b. **PLAY**
Press to play or pause the track. When in FM mode, press to auto search and save channels.
- c. **STOP**
Press to stop playing. When in SD/USB mode, press to enter the menu.
- d. **REPT**
Press to switch the play mode, such as in order or shuffle.
- e. **PREV**
Short press for previous track and long press to turn down volume. When in FM mode, short press for previous channel.
- f. **NEXT**
Short press for next track and long press to turn up volume. When in FM mode, short press for next channel.

MT-PowerAUDIO MIXING AMPLIFIER USER MANUAL

PMA-180-6 / PMA-240-6
PMA-360-6 / PMA-500-6

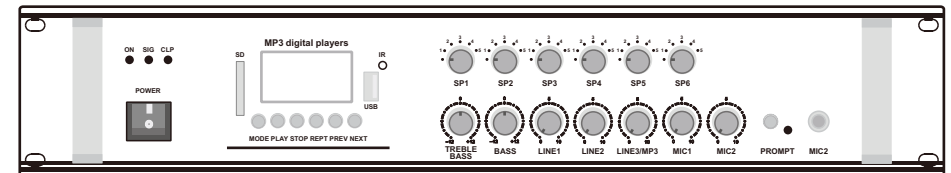

Packing List

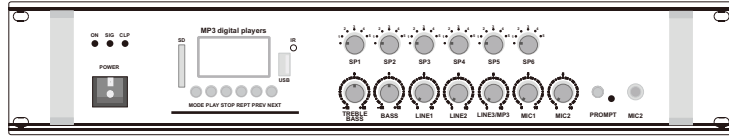

amplifier



user manual

Instruction

This machine is a professional Hi-Fi power Amplifier with transistors. It has reliable protective device for short circuit, over load and overheat. This machine features high electrical performance index, stable reliability, easy operation and other advantages. It can be used for amplifying quality language and music.

Operation Remarks


In order to protect this machine, please note the following points:

- Do not expose the product to rain, high temperature or sunlight. And avoid getting water into the product via ventilation hole.
- Use the product only with the voltage specified on the unit.
- Do not operate the product in the place with high electromagnetic field.
- Ensure the earth terminal is connected to a proper ground for safety.
- If this machine has faults, please ask qualified professional to repair it.

Specifications


Model No.	PMA-180-6	PMA-240-6	PMA-360-6	PMA-500-6
Output Power (Rated)	180W	240W	360W	500W
Total Harmonic Distortion	60Hz-16KHz<0.1%			
Signal-To-Noise Ratio	MIC: 66dB LINE: 102dB			
Input	MIC IN x2, LINE IN x3, USB/SD/Bluetooth/FM			
Input Impedance	MIC: 600Ω LINE: 10KΩ			
Input Sensitivity	MIC: 66dB LINE: -10dB			
Output	Direct outputs: 8Ω, 70V, 100V; Zone outputs: 6 zones; Monitor output/bridge signal output x1			
Frequency Response (±3dB)	60Hz - 16kHz ±0.5dB			
Power Supply	100 - 240V 50/60Hz			
Product Dimension (mm)	480x330x88	480x330x88	480x330x88	480x360x88
Product Weight	8.1kg	9.6 kg	10.8 kg	12.2kg

Operation

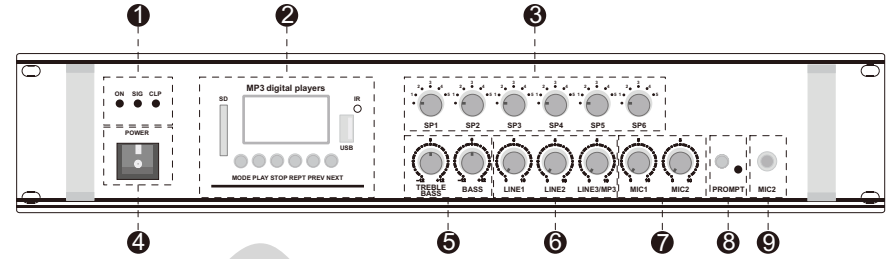

- Level Indicator and Power Indicator
- MP3 Module
- 6 Independent Speaker Volume Knob
- Power Switch
- Treble and Bass Knobs
- LINE Input Volume Knob
- MIC Volume Knob
- MIC Reminder Tone Button
- MIC 2 Input Port

Operation

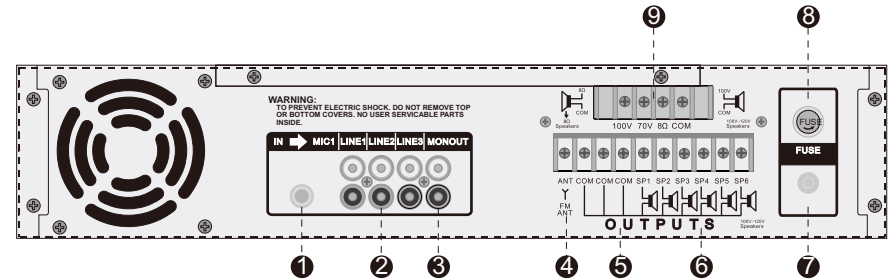

- MIC 1 Input Terminal
- LINE 1,2,3 Input Terminal
- Parallel Output Terminal
- FM Antenna Terminal
- COM Output Terminal Strip
- 6 Independent Speaker Output Terminal
- Power Cord
- Fuse Base
- 8Ω, 70V, 100V Output Terminal