



PHONES

(044) 360-7-130
(050) 336-0-130
(063) 788-0-130
(067) 233-0-130
(068) 282-0-130

130 Internet store of autogoods

COM.UA



ICQ
294-0-130
597-0-130

SKYPE
km-130

CAR RECEIVERS — Receivers • Media receivers and stations • Native receivers • CD/DVD changers • FM-modulators/USB adapters • Flash memory • Facia plates and adapters • Antennas • Accessories |
CAR AUDIO — Car audio speakers • Amplifiers • Subwoofers • Processors • Crossovers • Headphones • Accessories | TRIP COMPUTERS — Universal computers • Model computers • Accessories |
GPS NAVIGATORS — Portable GPS • Built-in GPS • GPS modules • GPS trackers • Antennas for GPS navigators • Accessories | VIDEO — DVR • TV sets and monitors • Car TV tuners • Cameras • Videomodules
• Transcoders • Car TV antennas • Accessories | SECURITY SYSTEMS — Car alarms • Bike alarms • Mechanical blockers • Immobilizers • Sensors • Accessories | OPTIC AND LIGHT — Xenon • Bixenon • Lamps
• LED • Stroboscopes • Optic and Headlights • Washers • Light, rain sensors • Accessories | PARKTRONICS AND MIRRORS — Rear parktronic • Front parktronic • Combined parktronic • Rear-view mirrors
• Accessories | HEATING AND COOLING — Seat heaters • Mirrors heaters • Screen-wipers heaters • Engine heaters • Auto-refrigerators • Air conditioning units • Accessories | TUNING — Vibro-isolation
• Noise-isolation • Tint films • Accessories | ACCESSORIES — Radar-detectors • Handsfree, Bluetooth • Windowlifters • Compressors • Beeps, loudspeakers • Measuring instruments • Cleaners • Carsits
• Miscellaneous | MOUNTING — Installation kits • Upholstery • Grilles • Tubes • Cable and wire • Tools • Miscellaneous | POWER — Batteries • Converters • Start-charging equipment • Capacitors
• Accessories | MARINE AUDIO AND ELECTRONICS — Marine receivers • Marine audio speakers • Marine subwoofers • Marine amplifiers • Accessories | CAR CARE PRODUCTS — Additives • Washer fluid •
Care accessories • Car polish • Flavors • Adhesives and sealants | LIQUID AND OIL — Motor oil • Transmission oil • Brake fluid • Antifreeze • Technical lubricant



In store "130" you can find and buy almost all necessary goods for your auto in Kyiv and other cities, delivery by ground and postal services. Our experienced consultants will provide you with exhaustive information and help you to chose the very particular thing. We are waiting for you at the address

<http://130.com.ua>



audison

www.audison.eu

SR 4


360W Power Amplifier
Four channel amplifier with crossover

ADVANCED WEB MANUAL



SPECIFICATIONS

Control panel and terminals

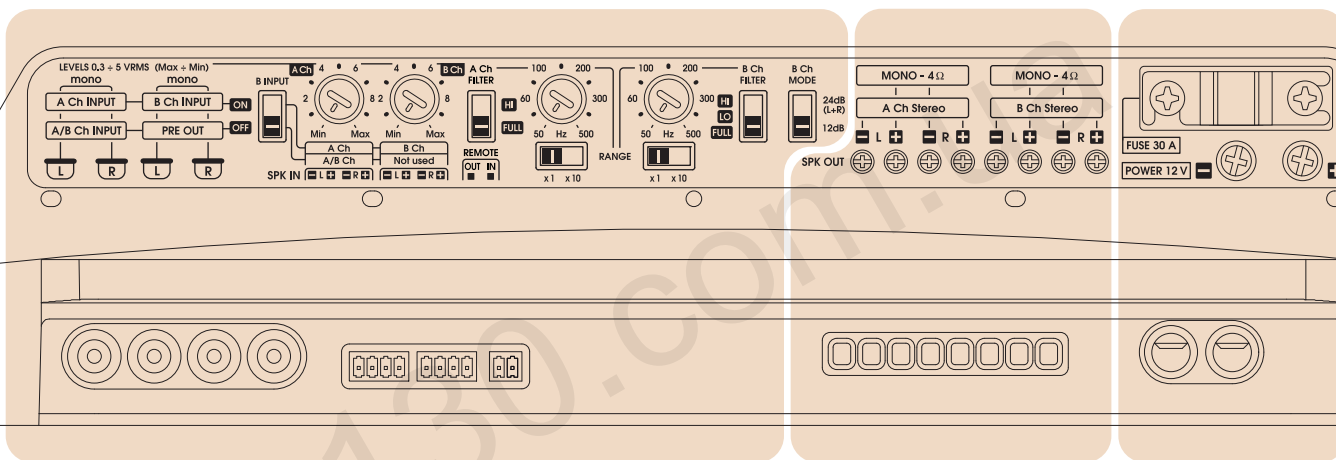


Inputs / Outputs / Functions

Power Outputs

Power Supply


INPUTS

1 PRE IN: A Ch
1 PRE OUT: B Ch

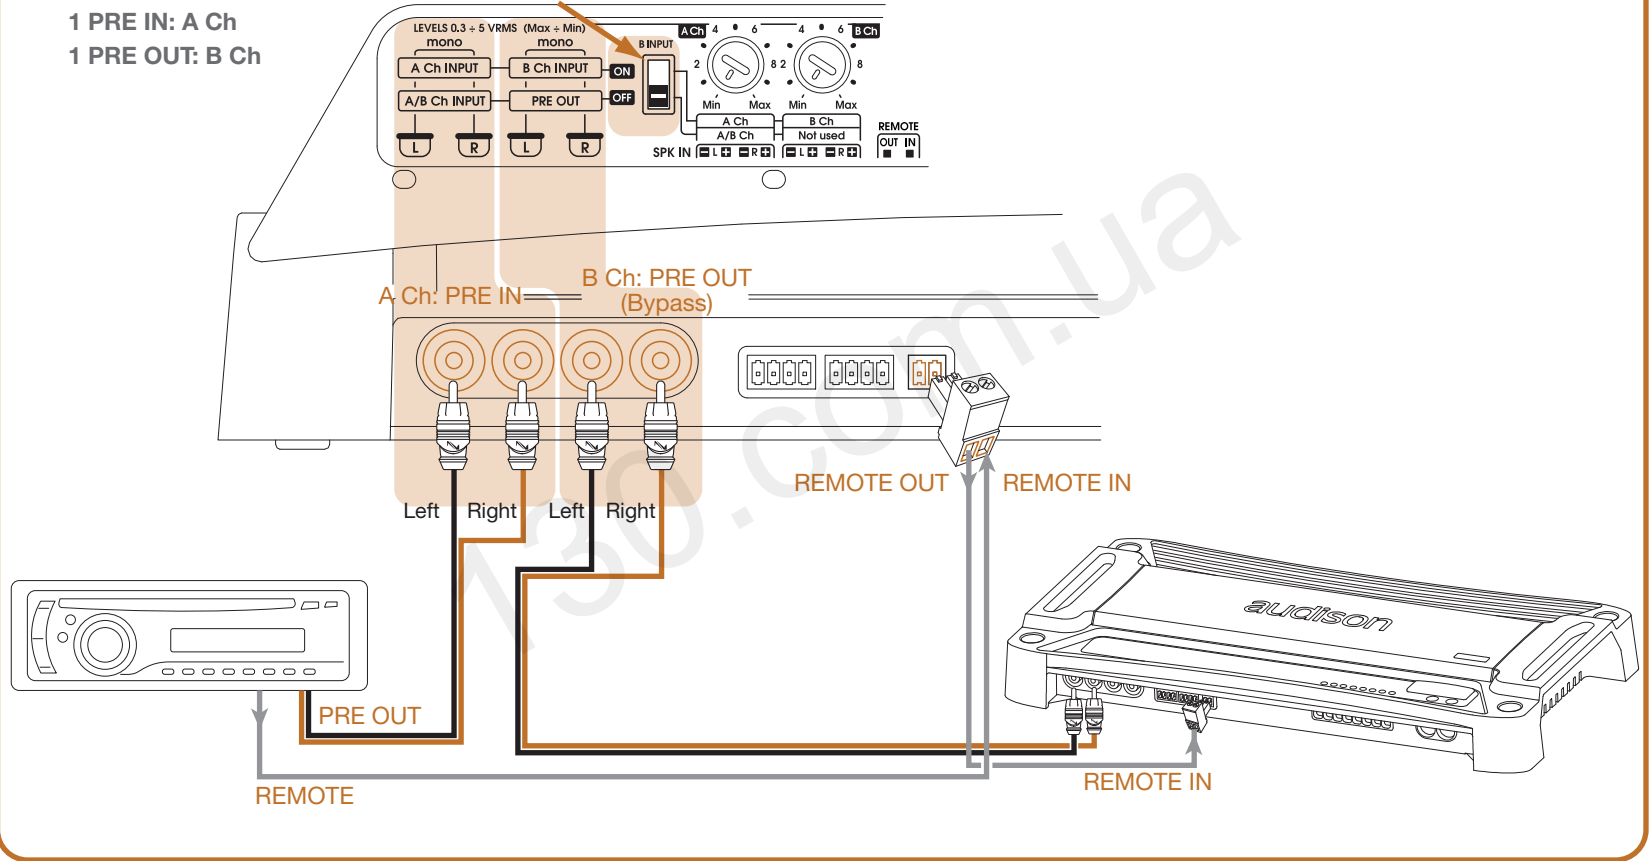


INPUTS

2 PRE IN: A and B

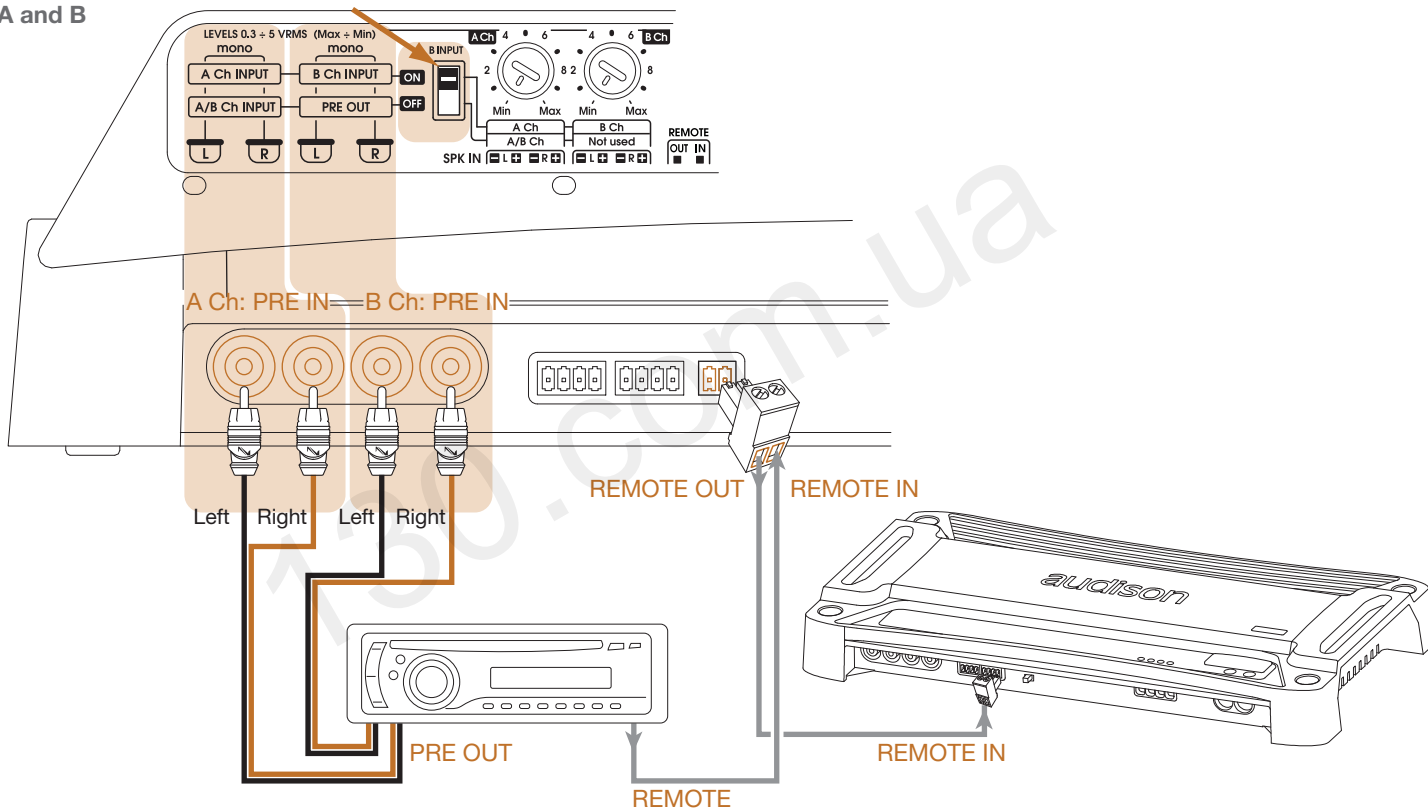


INPUTS

1 SPEAKER IN: A Ch
1 PRE OUT: B Ch

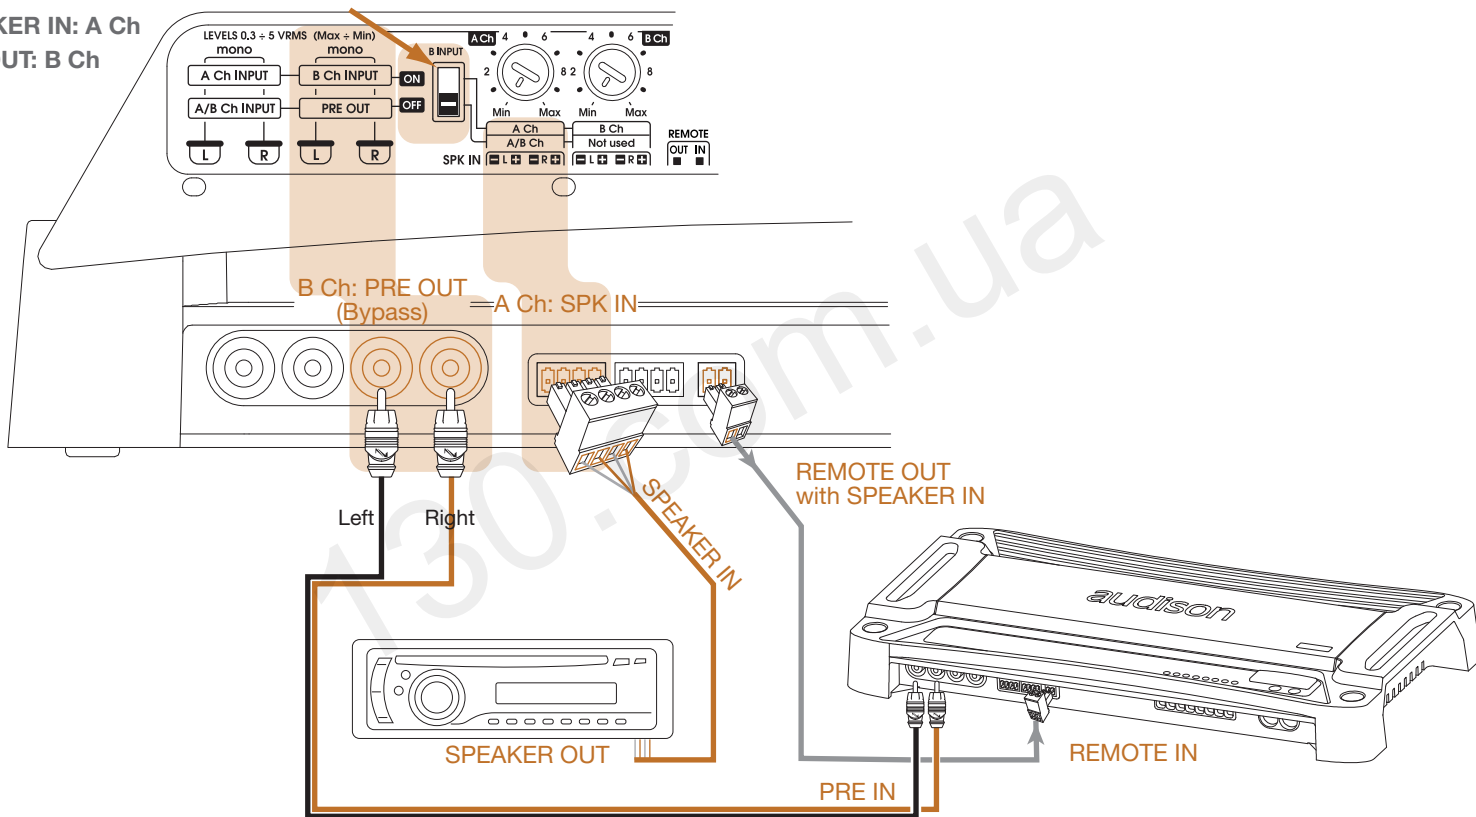




INPUTS

2 SPEAKER IN: A and B

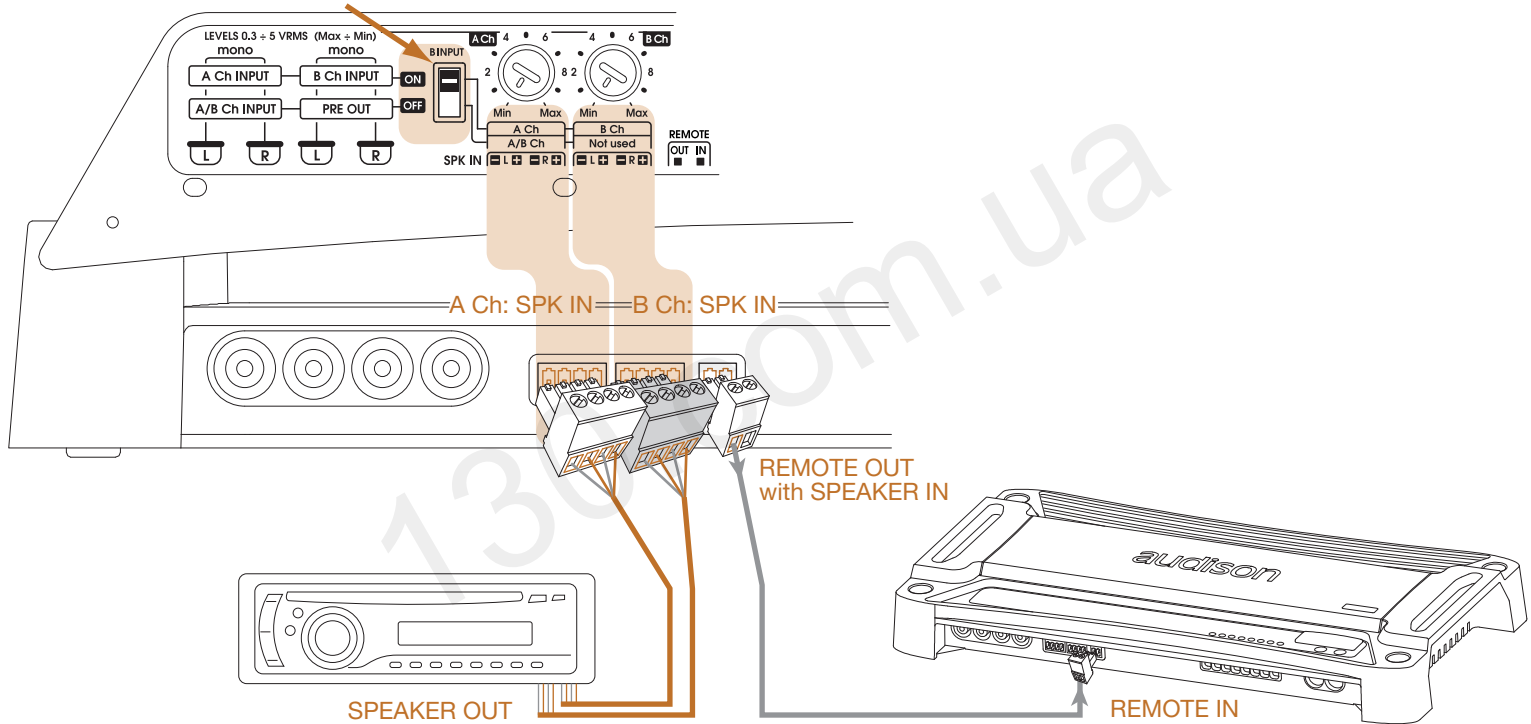

POWER OUTPUTS

4 Channels Mode

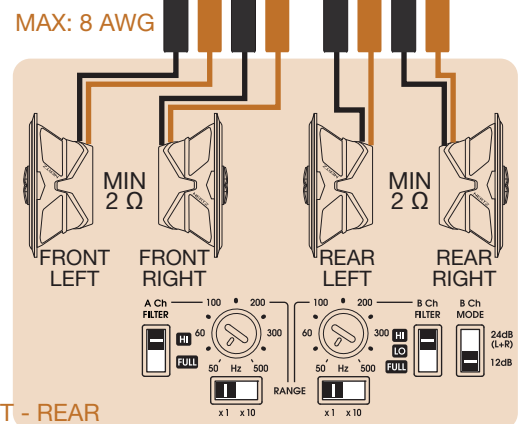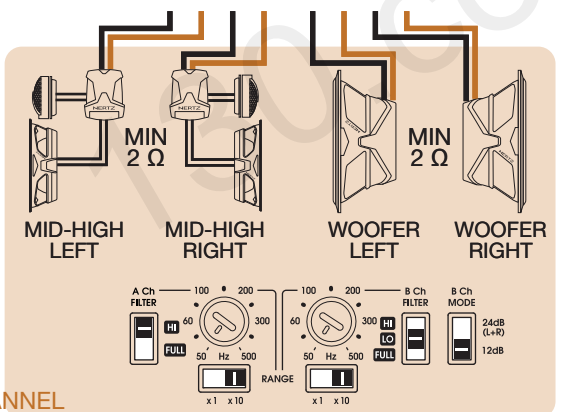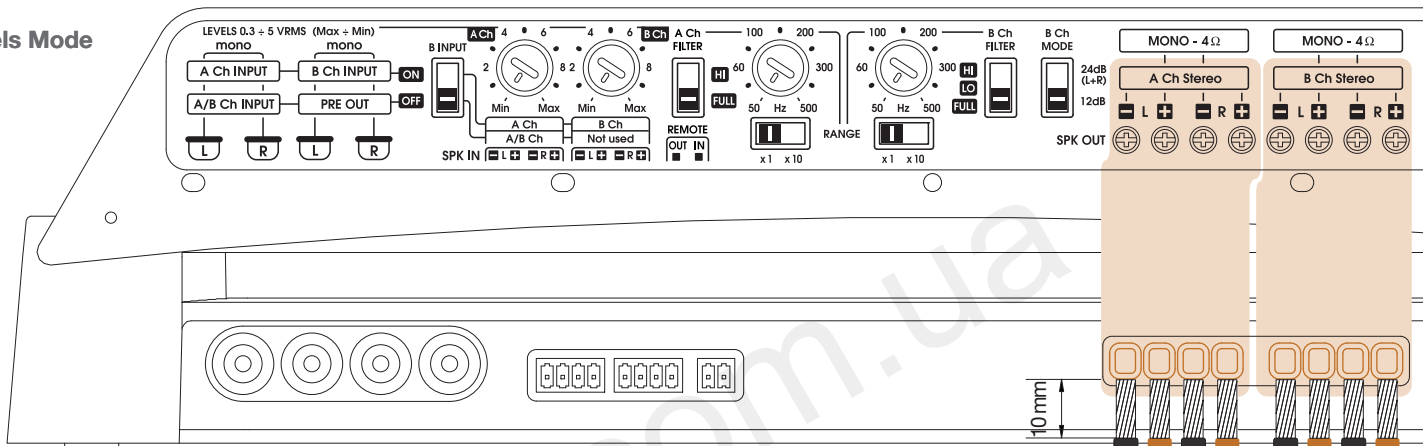


OR

MAX: 8 AWG

POWER OUTPUTS

3 Channels Mode

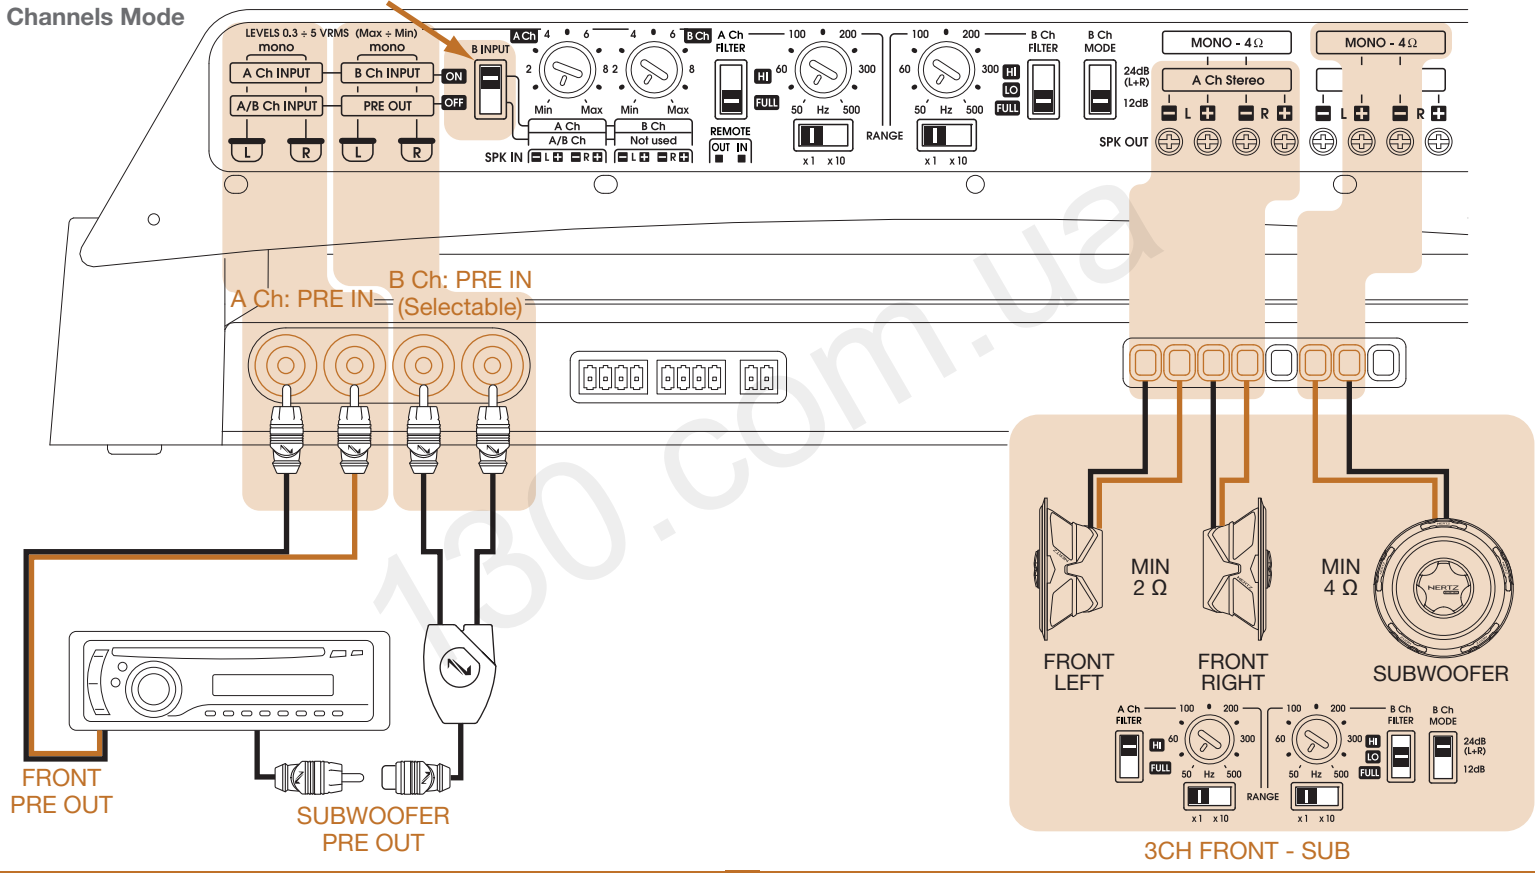

SPECIFICATIONS

Configuration table

Conf.	4CH MODE AMP	A Ch	B Ch
1		Full	Full
2		Full	Hi-pass
3		Hi-pass	Full
4		Hi-pass	Hi-pass
5		Full	Lo-pass
6		Hi-pass	Lo-pass


Conf.	3CH MODE AMP	A Ch	B Ch
1		Full	Lo-pass
2		Hi-pass	Lo-pass

Conf.	2CH MODE AMP	A Ch	B Ch
1		Full	Full
2		Hi-pass	Hi-pass
3		Full OR Hi-pass	Lo-pass

4/3 Ch	
B INPUT <input type="checkbox"/> ON <input type="checkbox"/> OFF	B INPUT <input type="checkbox"/> ON <input type="checkbox"/> OFF
A Ch Stereo A IN	A IN
B Ch St/Mo A IN	B IN L and R
B Pre Out ON	OFF

2 Ch	
B INPUT <input type="checkbox"/> ON <input type="checkbox"/> OFF	
A Ch Mono A IN L	
B Ch Mono A IN R	
B Pre Out OFF	

COVER and FUSE

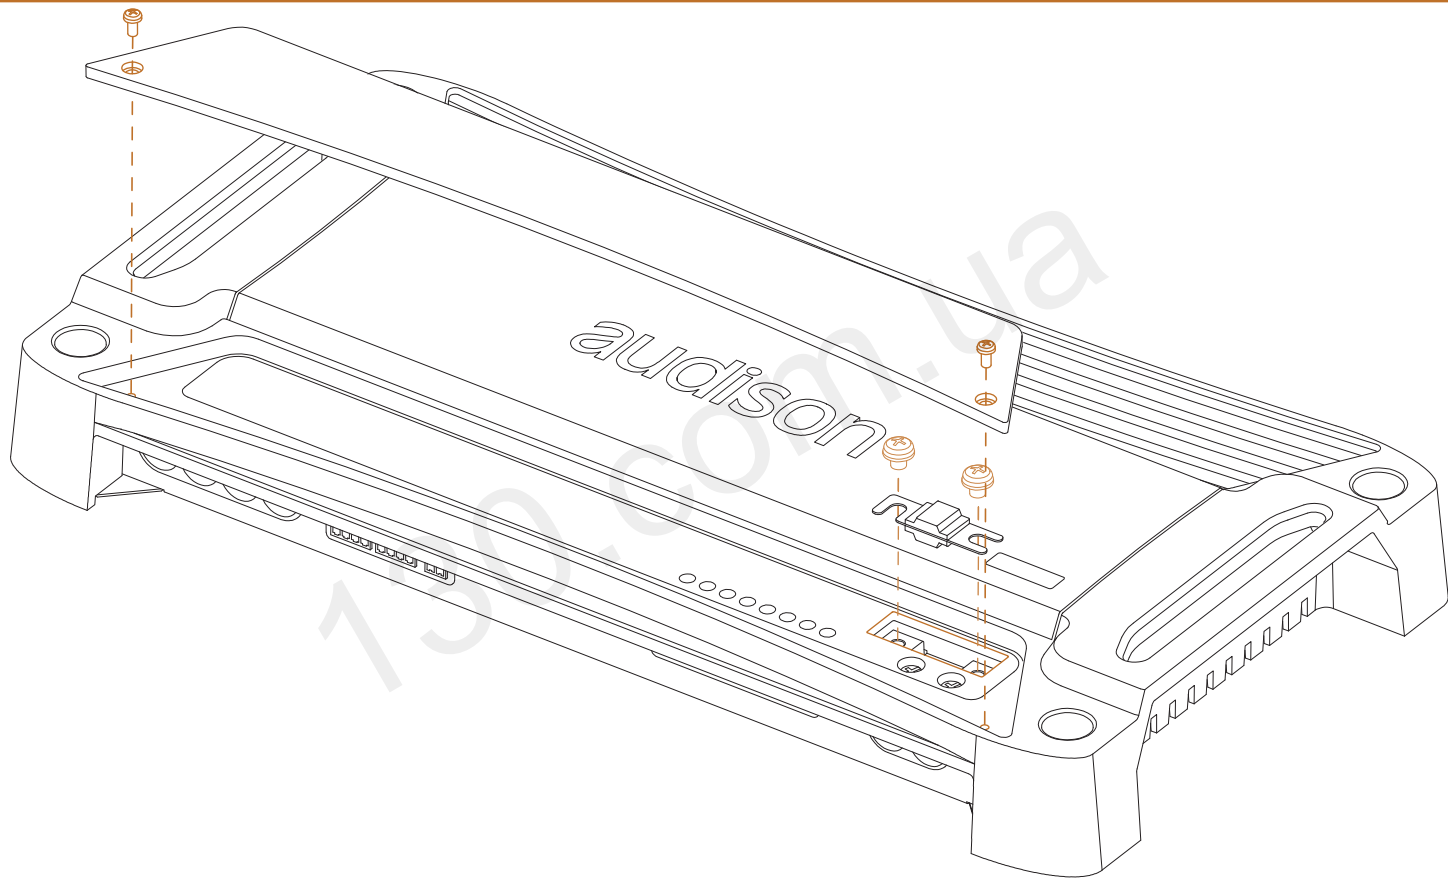

TECHNICAL SPECIFICATIONS

Power Supply

Voltage:	11÷15 VDC
Idling current:	0.7 A
Switched off:	<0.01 mA
Remote IN voltage:	7÷15 VDC (1 mA)
Remote OUT voltage:	11÷15 VDC (15 mA)
Internal fuse (AFS):	30 A
Consumption @ 14.4 VDC, 2 Ω, Max Musical Power:	24 A

Inputs/Outputs/Filters

Inputs	Pre IN / Speaker IN
Output	Pre
A Ch Filter	Full / Hi-pass: 50 ÷ 5k Hz @ 12 dB/oct
B Ch Filter	Full / Hi / Lo-pass: 50 ÷ 5k Hz @ 12 / 24 (L+R) dB/oct

Size

WxHxD (mm/inches)	213 x 53.5 x 408 / 8 ^{9/16} x 2 ^{1/8} x 16 ^{1/16}
Weight (kg/lb)	3.3 / 7.28

Amplifier stage

Distortion - THD @ 1 kHz, 4 Ω, 90% Power:	0.08 %
Bandwidth @ -3 dB, 2 VRMS, 4 Ω:	15 ÷ 50k Hz
S/N ratio @ A weighted, 1 V, Max Power:	104 dB
Damping factor @ 1 kHz, 2 VRMS, 4 Ω:	110
Input sensitivity (PRE IN):	0.3 ÷ 5 VRMS
Input sensitivity (SPEAKER IN):	1 ÷ 15 VRMS
Input impedance (PRE IN):	15 kΩ
Input impedance (SPEAKER IN):	100 Ω
Load impedance (Min):	
4 Ch	2 Ω
2 Ch	4 Ω
Nominal power (RMS) @12 VDC; 1% THD, 4 Ω:	45 W x 4
Output power (RMS) @14.4 VDC; 1% THD:	
4 Ch @ 4 Ω	65 W x 4
4 Ch @ 2 Ω	90 W x 4
3 Ch @ 4 Ω	60 W x 2 + 190 W x 1
2 Ch @ 4 Ω	175 W x 2

CEA Specifications

Output Power @ 4 Ω, ≤ 1% THD+N, 14.4 V:	60 W x 4 Ch
S/N ratio (ref. 1W output): 60 W Channels:	83 dBA



130.com.ua

audison

PART OF **ELETTROMEDIA** - 62018 Potenza Picena (MC) Italy - T +39 0733 870 870 - F +39 0733 870 880 - www.elettromedia.it