



PHONES

(044) 360-7-130  
(050) 336-0-130  
(063) 788-0-130  
(067) 233-0-130  
(068) 282-0-130

130  
COM.UA

Internet store of  
autogoods



ICQ  
294-0-130  
597-0-130


SKYPE  
km-130

CAR RECEIVERS — Receivers • Media receivers and stations • Native receivers • CD/DVD changers • FM-modulators/USB adapters • Flash memory • Facia plates and adapters • Antennas • Accessories |  
CAR AUDIO — Car audio speakers • Amplifiers • Subwoofers • Processors • Crossovers • Headphones • Accessories | TRIP COMPUTERS — Universal computers • Model computers • Accessories |  
GPS NAVIGATORS — Portable GPS • Built-in GPS • GPS modules • GPS trackers • Antennas for GPS navigators • Accessories | VIDEO — DVR • TV sets and monitors • Car TV tuners • Cameras • Videomodules  
• Transcoders • Car TV antennas • Accessories | SECURITY SYSTEMS — Car alarms • Bike alarms • Mechanical blockers • Immobilizers • Sensors • Accessories | OPTIC AND LIGHT — Xenon • Bixenon • Lamps  
• LED • Stroboscopes • Optic and Headlights • Washers • Light, rain sensors • Accessories | PARKTRONICS AND MIRRORS — Rear parktronic • Front parktronic • Combined parktronic • Rear-view mirrors  
• Accessories | HEATING AND COOLING — Seat heaters • Mirrors heaters • Screen-wipers heaters • Engine heaters • Auto-refrigerators • Air conditioning units • Accessories | TUNING — Vibro-isolation  
• Noise-isolation • Tint films • Accessories | ACCESSORIES — Radar-detectors • Handsfree, Bluetooth • Windowlifters • Compressors • Beeps, loudspeakers • Measuring instruments • Cleaners • Carsits  
• Miscellaneous | MOUNTING — Installation kits • Upholstery • Grilles • Tubes • Cable and wire • Tools • Miscellaneous | POWER — Batteries • Converters • Start-charging equipment • Capacitors  
• Accessories | MARINE AUDIO AND ELECTRONICS — Marine receivers • Marine audio speakers • Marine subwoofers • Marine amplifiers • Accessories | CAR CARE PRODUCTS — Additives • Washer fluid •  
Care accessories • Car polish • Flavors • Adhesives and sealants | LIQUID AND OIL — Motor oil • Transmission oil • Brake fluid • Antifreeze • Technical lubricant



In store "130" you can find and buy almost all necessary goods for your auto in Kyiv and other cities, delivery by ground and postal services. Our experienced consultants will provide you with exhaustive information and help you to chose the very particular thing. We are waiting for you at the address

<http://130.com.ua>

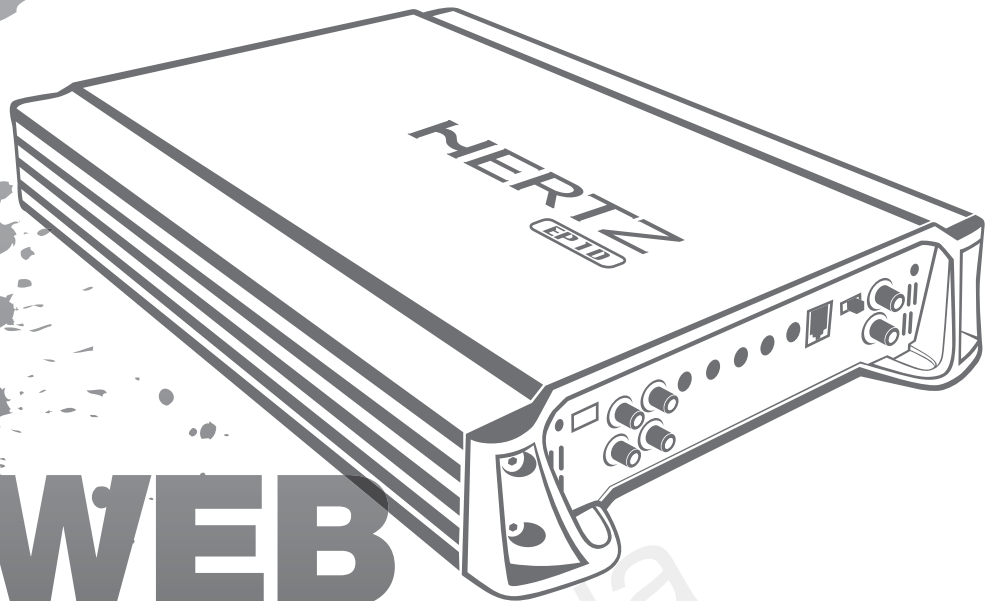

# WEB MANUAL

**EP 1D**


[www.hertzaudiovideo.com](http://www.hertzaudiovideo.com)



**HERTZ**  
The Sound Experience


**INPUTS**

**PRE IN / PRE OUT**

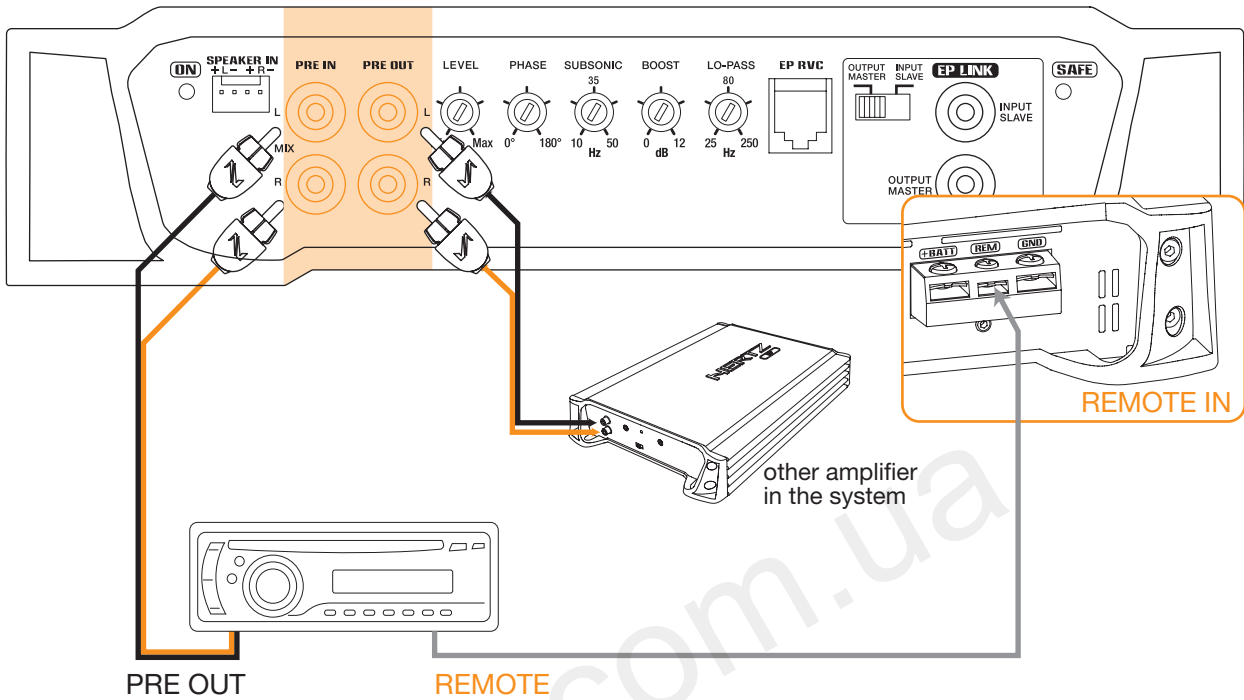


**INPUTS**

**SPEAKER IN / PRE OUT**

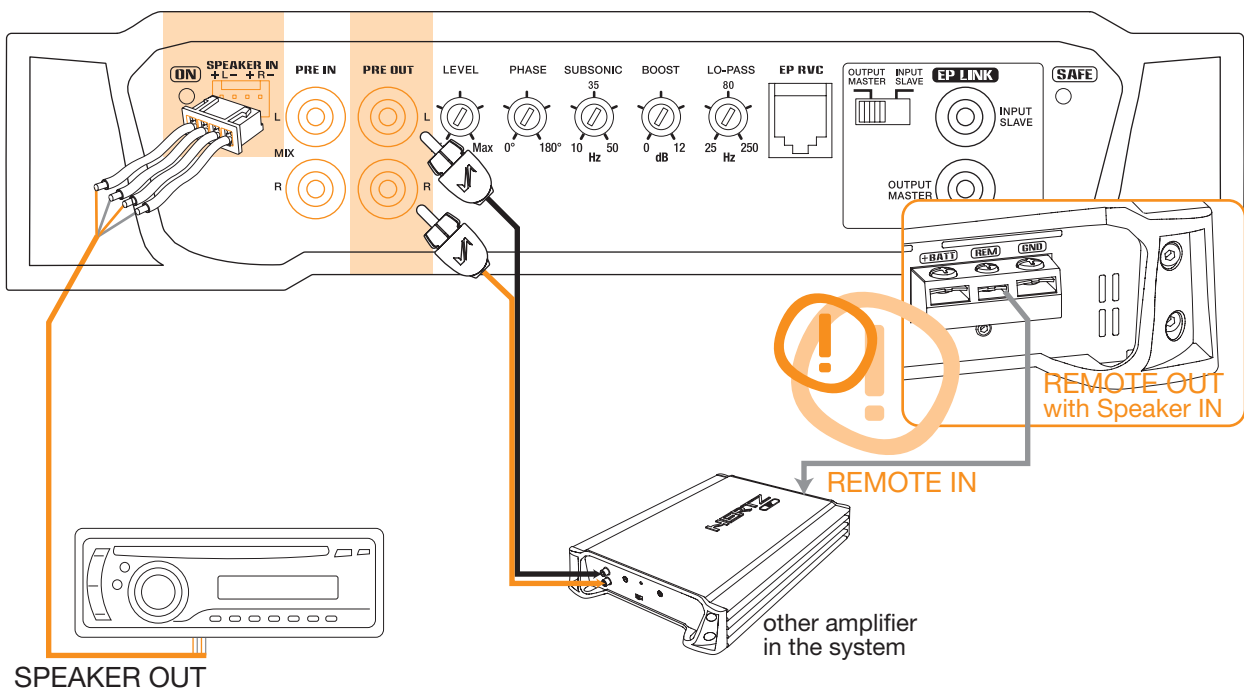


**OUTPUTS**

**SINGLE SUBWOOFER**

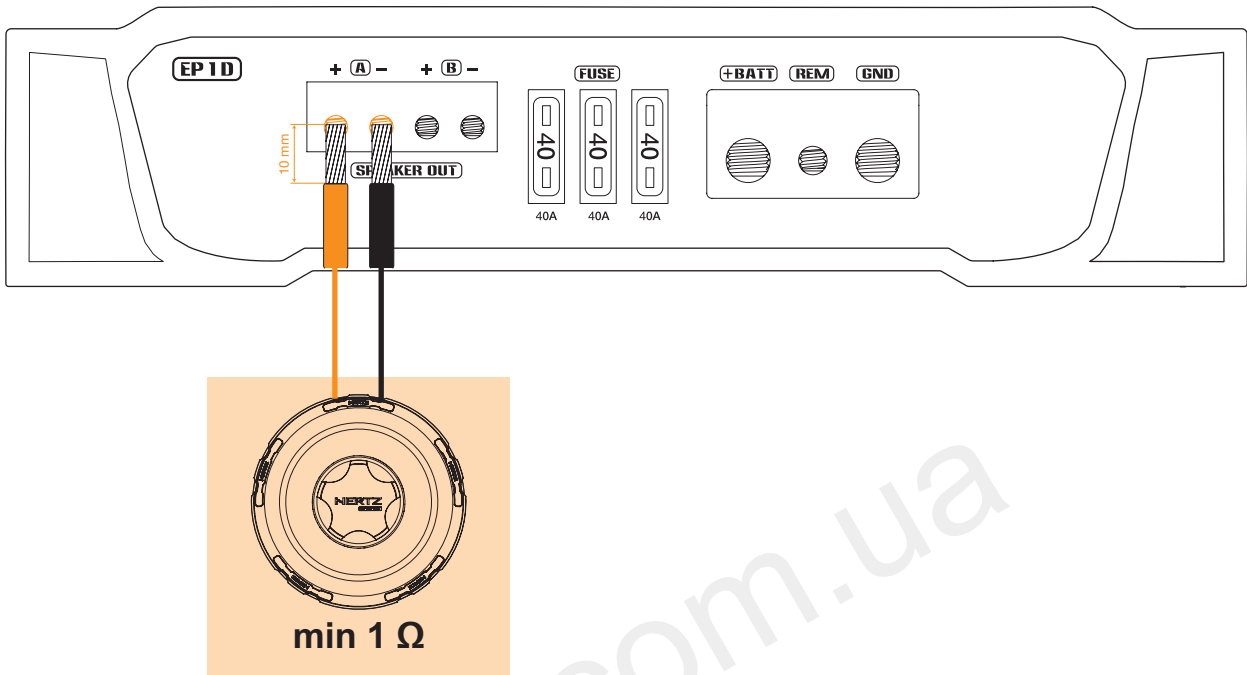


**OUTPUTS**

**DOUBLE SUBWOOFER (parallel connection)**

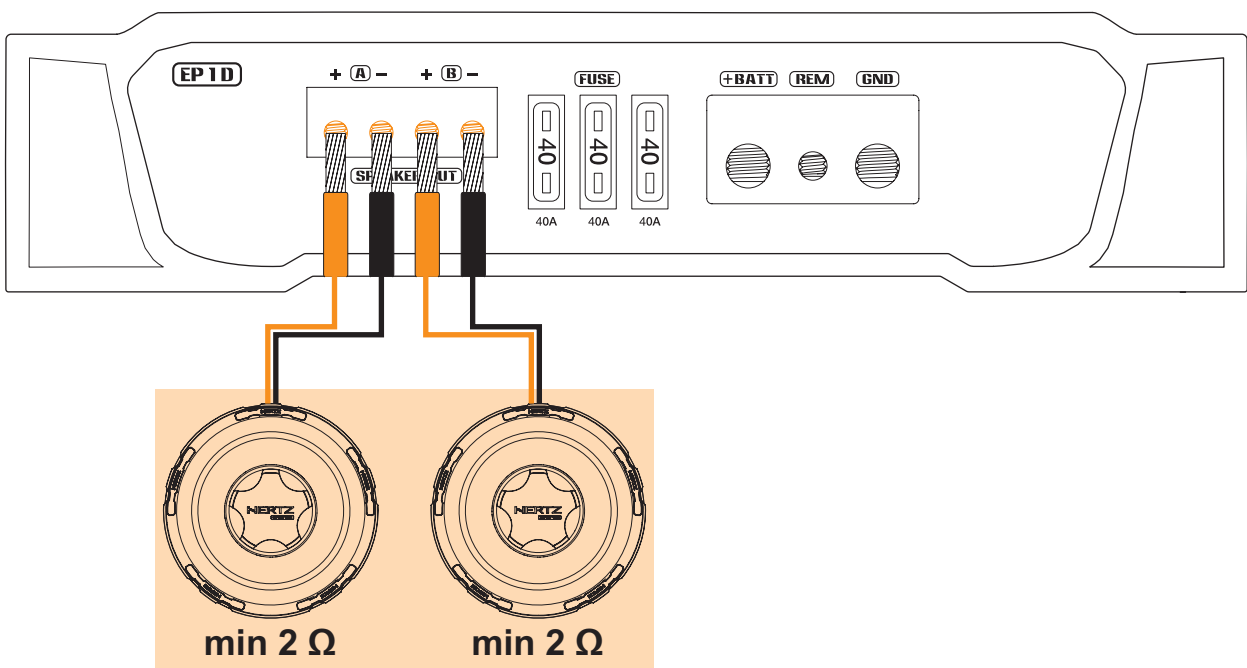


EP LINK

INPUT CONFIGURATION

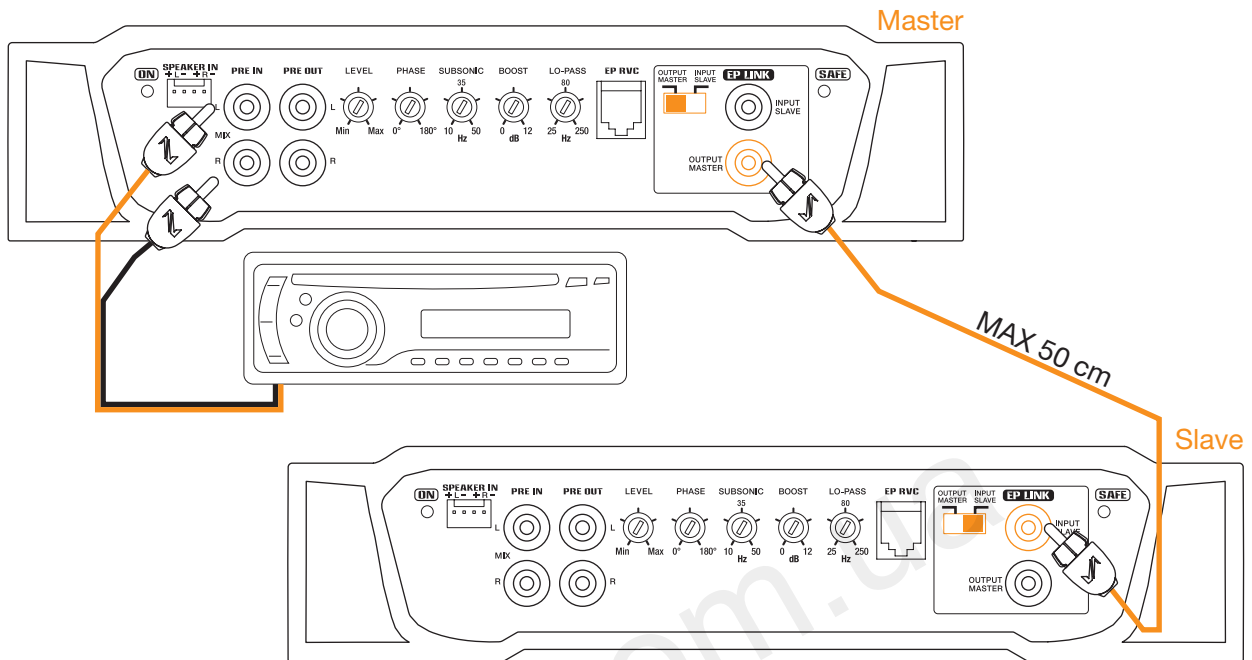


OUTPUT CONFIGURATION

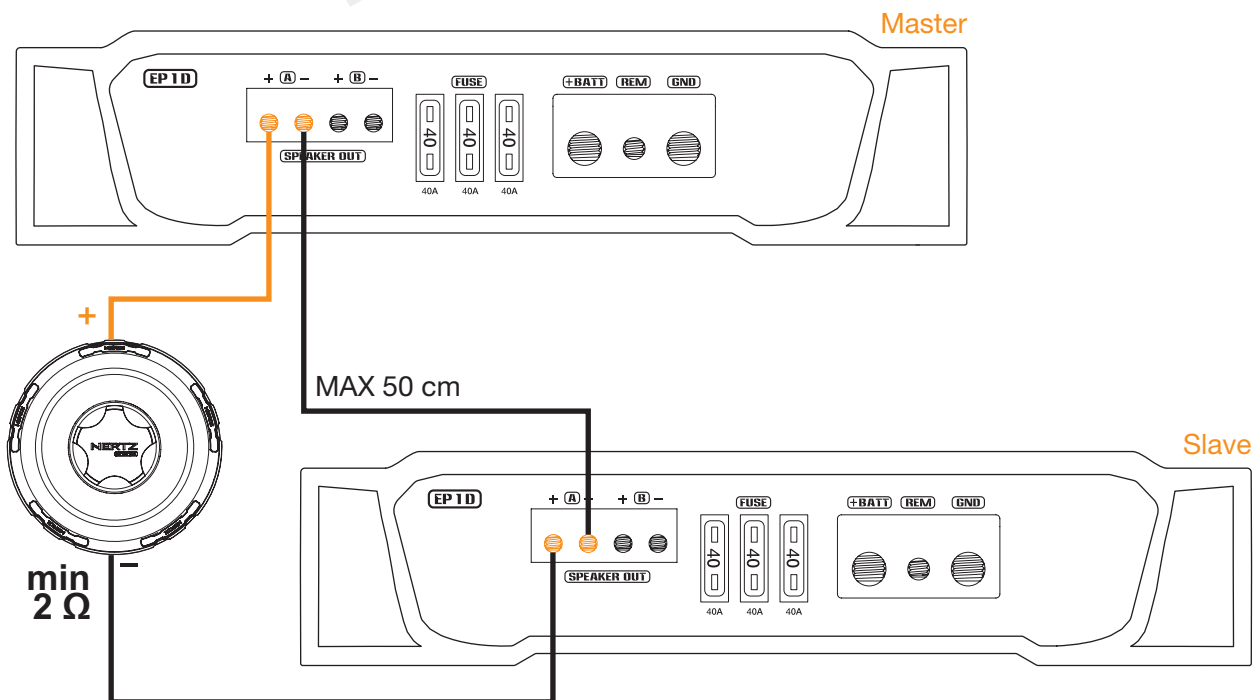


**CONTROLS**


**REMOTE VOLUME CONTROL**

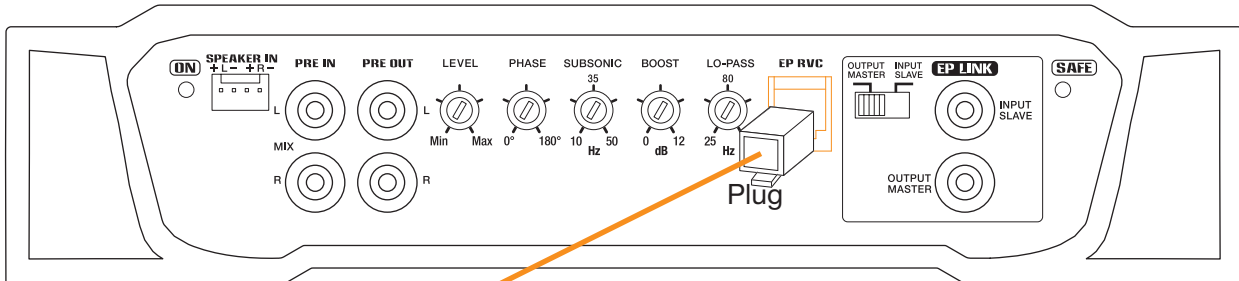

5 m (provided with RVC SUB A)


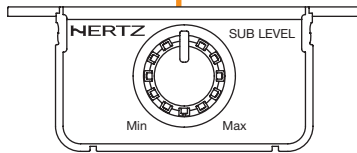


**RVC SUB A (optional)**

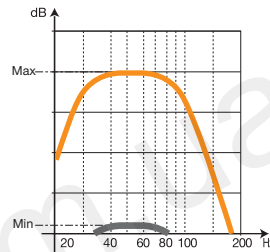


**CONTROLS**

**PHASE CONTROL**

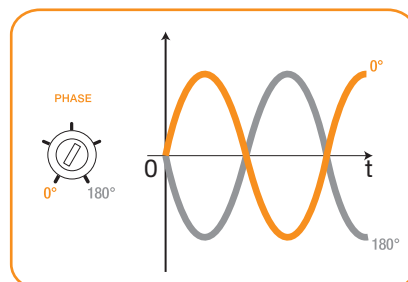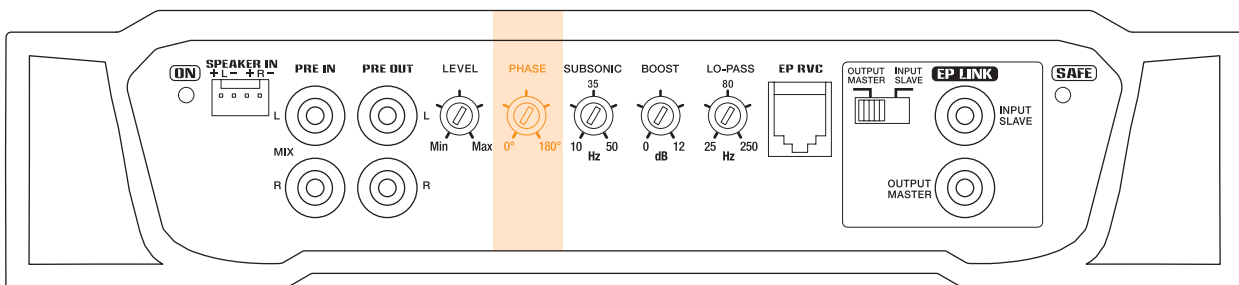


**CONTROLS**

**SUBSONIC / LO-PASS FILTER**

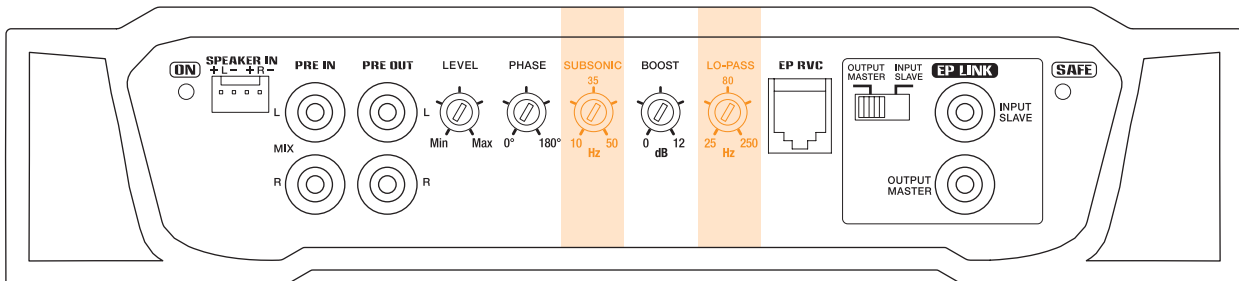


**SUBSONIC FILTER**

10÷50 Hz @ 24 dB Oct.

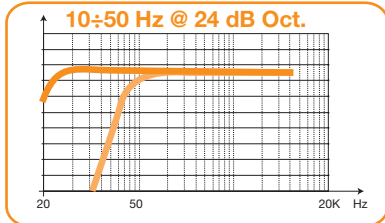


**LO-PASS FILTER**

25÷250 Hz @ 24 dB Oct.

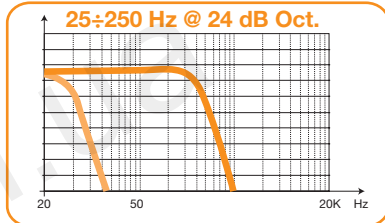


**CONTROLS**

**BASS BOOST**

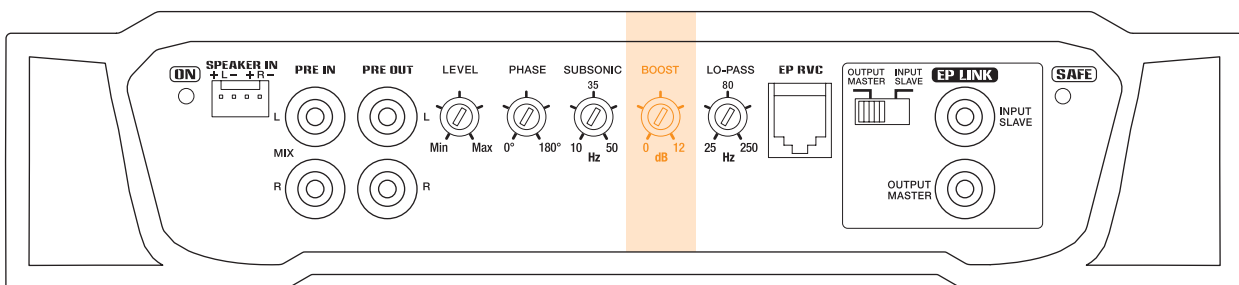

0 ÷ +12 dB @ 45 Hz


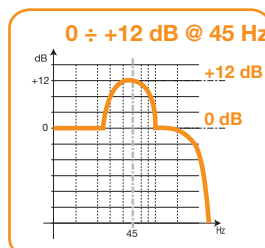


**CONFIGURATION**

**Input/Output configuration**

Input	Speaker	Pre Out
L&R	Mix L+R	L+R
L	Mix L+R	L
R	Mix L+R	R

**Filter configuration**

Config.	AMP	PRE OUT
1		

**TECHNICAL SPECIFICATIONS**

**EP 1D**

<b>Power Supply</b>	
Voltage	11±15 VDC
Minimum idling current	2 A
Idling current when off	0.04 mA
Consumption @ 1Ω; 14.4 VDC (MAX Musical Power)	56 A
Remote IN Voltage	6±15 VDC (1 mA)
Internal fuse	3 x 40 A
<b>Amplifier stage</b>	
Bandwidth (-3dB)	10 Hz±250 Hz
Distortion - THD (100 Hz @ 4 Ω)	0.15%
S/N Ration (weighted A @ 1 V)	100 dB
Damping factor (100 Hz @ 4 Ω)	> 100
Input sensitive (PRE IN)	0.3±5 V
Input sensitive (Speaker IN)	1.4±24 V
Input impedance (PRE IN)	15 kΩ
Input impedance (Speaker IN)	5 kΩ
Load impedance (MIN)	
1 Ch	4 ÷ 1Ω
EP LINK	4 ÷ 2Ω
Output Power (RMS) @ 14.4 VDC; THD 1%	
1 Ch	400 W x 1 (4Ω)
1 Ch	750 W x 1 (2Ω)
1 Ch	1000 W x 1 (1Ω)
EP LINK	1500 W x 1 (4Ω)
EP LINK	1700 W x 1 (2Ω)
<b>Inputs / Outputs / Filters</b>	
Input	PRE / Speaker
AMP Filter	
Lo-Pass	Lo-pass 25±250Hz@24dB/Oct.
Subsonic	Hi-pass 10±50Hz@24dB/Oct.
Bass Boost	0 ÷ +12dB @ 45 Hz
Output Phase Control (Continuos)	0 ÷ + 180°
EP LINK mode	Master / Slave
<b>Other Functions</b>	
ART	Automatic Remote Turn-On/Off with Speaker-In
<b>Size</b>	
B x L x H mm	240 x 350 x 54
inches	9 <sup>15/32</sup> x 13 <sup>25/32</sup> x 2 <sup>5/32</sup>
Weight kg	3,90
lb	8.60