



PHONES

(044) 360-7-130
 (050) 336-0-130
 (063) 788-0-130
 (067) 233-0-130
 (068) 282-0-130

130

COM.UA

Internet store of autogoods



ICQ

294-0-130
 597-0-130


SKYPE
 km-130

CAR RECEIVERS — Receivers • Media receivers and stations • Native receivers • CD/DVD changers • FM-modulators/USB adapters • Flash memory • Facia plates and adapters • Antennas • Accessories |
 CAR AUDIO — Car audio speakers • Amplifiers • Subwoofers • Processors • Crossovers • Headphones • Accessories | TRIP COMPUTERS — Universal computers • Model computers • Accessories |
 GPS NAVIGATORS — Portable GPS • Built-in GPS • GPS modules • GPS trackers • Antennas for GPS navigators • Accessories | VIDEO — DVR • TV sets and monitors • Car TV tuners • Cameras • Videomodules • Transcoders • Car TV antennas • Accessories | SECURITY SYSTEMS — Car alarms • Bike alarms • Mechanical blockers • Immobilizers • Sensors • Accessories | OPTIC AND LIGHT — Xenon • Bixenon • Lamps • LED • Stroboscopes • Optic and Headlights • Washers • Light, rain sensors • Accessories | PARKTRONICS AND MIRRORS — Rear parktronic • Front parktronic • Combined parktronic • Rear-view mirrors • Accessories | HEATING AND COOLING — Seat heaters • Mirrors heaters • Screen-wipers heaters • Engine heaters • Auto-refrigerators • Air conditioning units • Accessories | TUNING — Vibro-isolation • Noise-isolation • Tint films • Accessories | ACCESSORIES — Radar-detectors • Handsfree, Bluetooth • Windowlifters • Compressors • Beeps, loudspeakers • Measuring instruments • Cleaners • Car seats • Miscellaneous | MOUNTING — Installation kits • Upholstery • Grilles • Tubes • Cable and wire • Tools • Miscellaneous | POWER — Batteries • Converters • Start-charging equipment • Capacitors • Accessories | MARINE AUDIO AND ELECTRONICS — Marine receivers • Marine audio speakers • Marine subwoofers • Marine amplifiers • Accessories | CAR CARE PRODUCTS — Additives • Washer fluid • Care accessories • Car polish • Flavors • Adhesives and sealants | LIQUID AND OIL — Motor oil • Transmission oil • Brake fluid • Antifreeze • Technical lubricant



In store "130" you can find and buy almost all necessary goods for your auto in Kyiv and other cities, delivery by ground and postal services. Our experienced consultants will provide you with exhaustive information and help you to choose the very particular thing. We are waiting for you at the address

<http://130.com.ua>

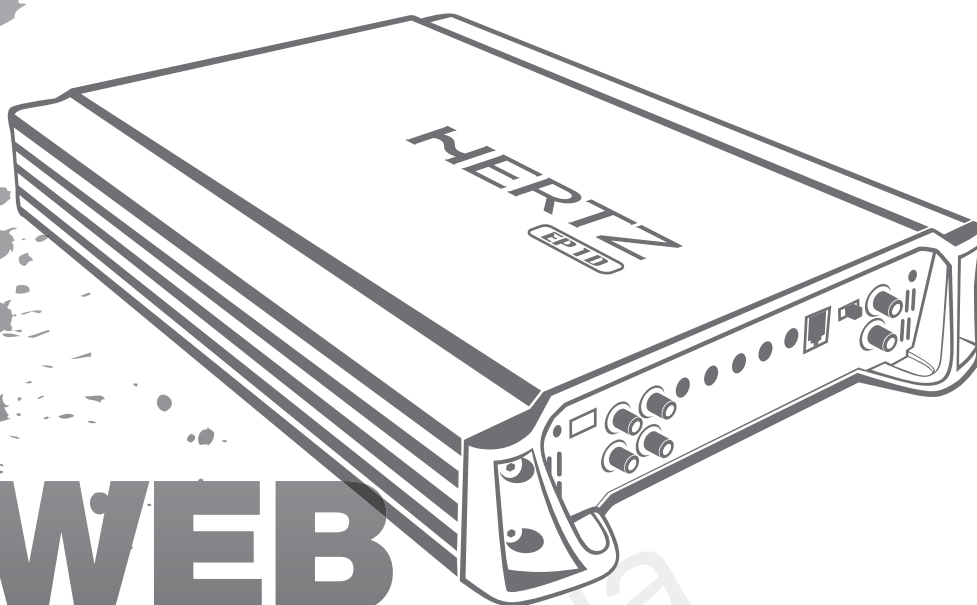

WEB MANUAL

EP 5


www.hertzaudiovideo.com



HERTZ
The Sound Experience


INPUTS

PRE IN 5 Channels Mode

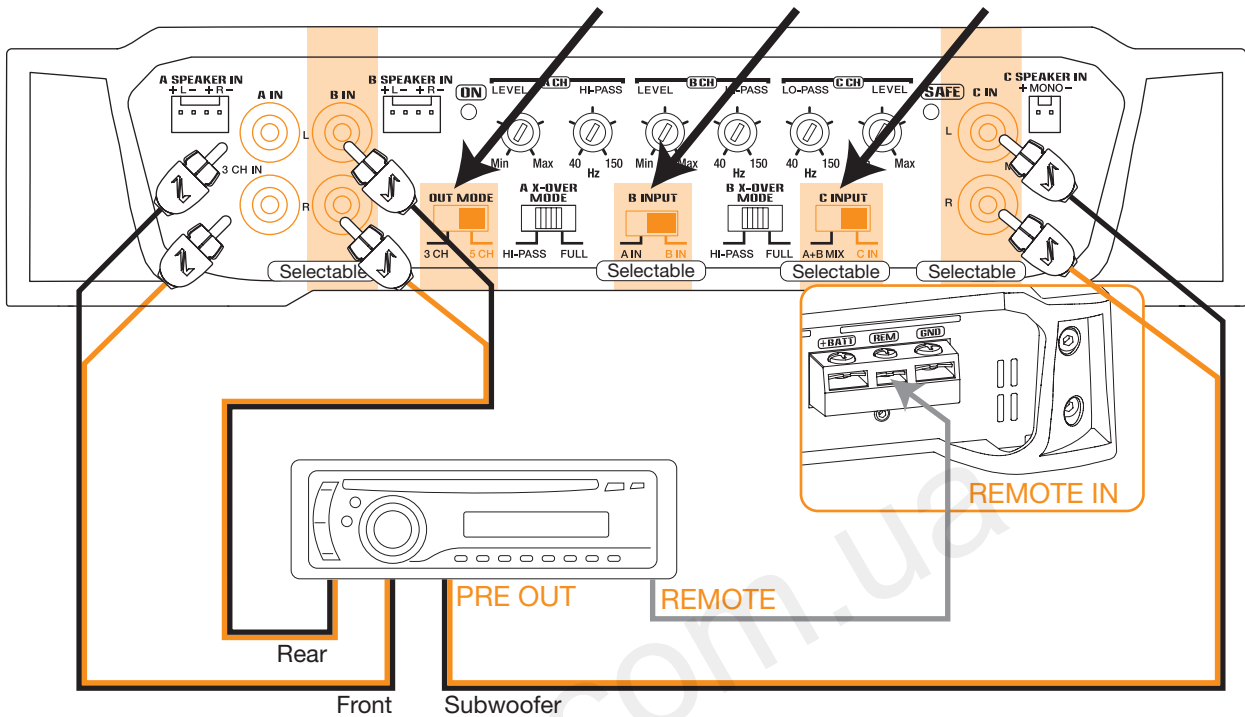


INPUTS

SPEAKER IN 5 Channels Mode

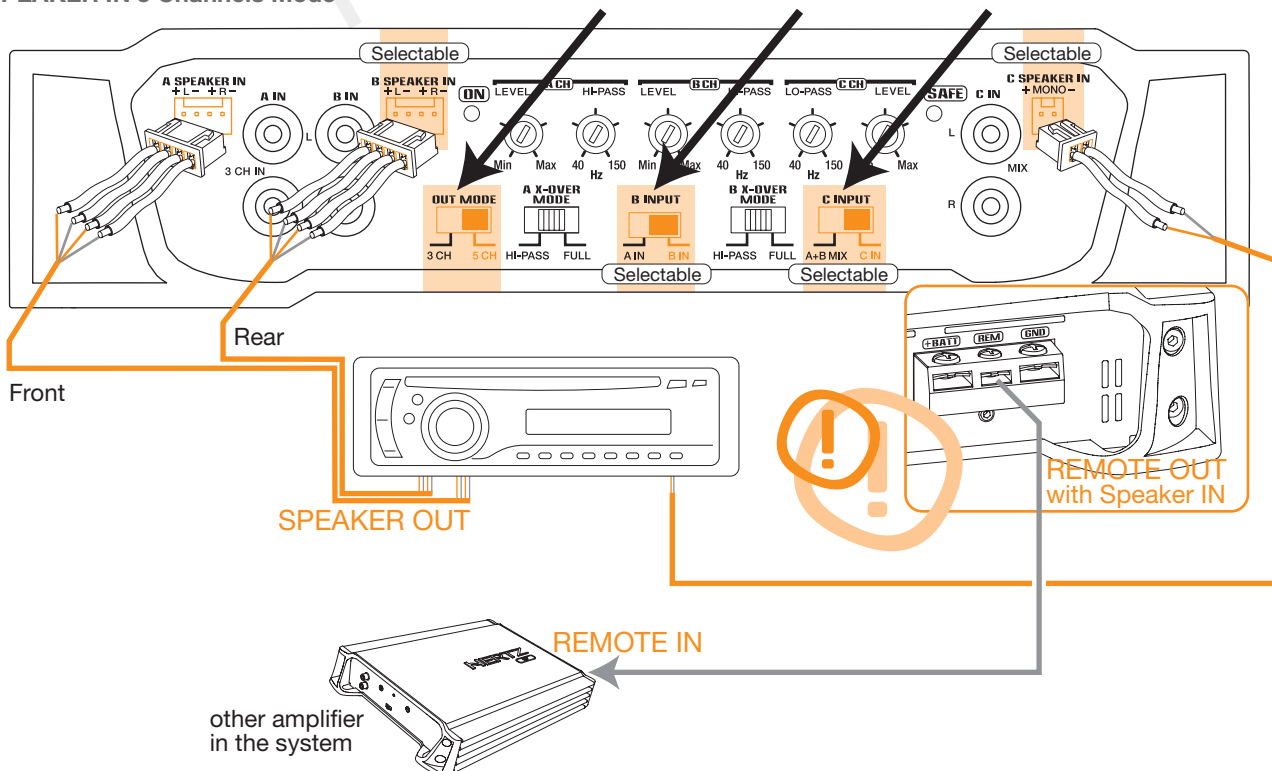


INPUTS

PRE IN 3 Channels Mode

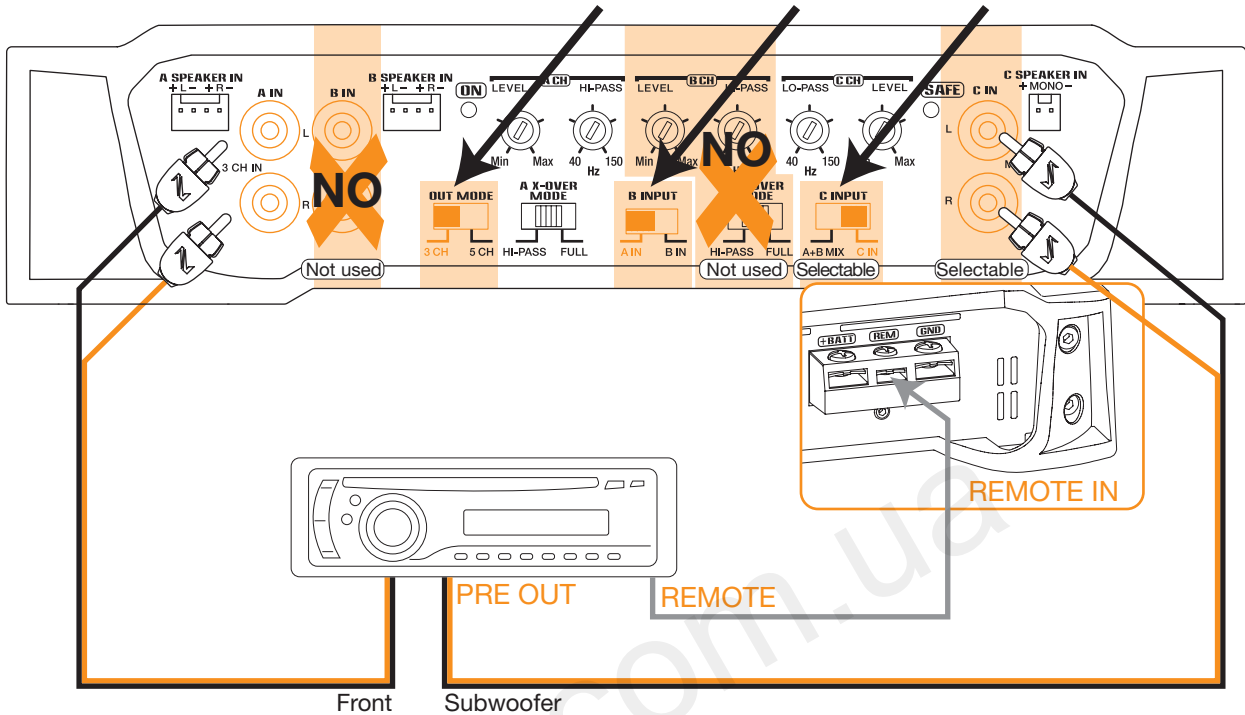


INPUTS

SPEAKER IN 3 Channels Mode

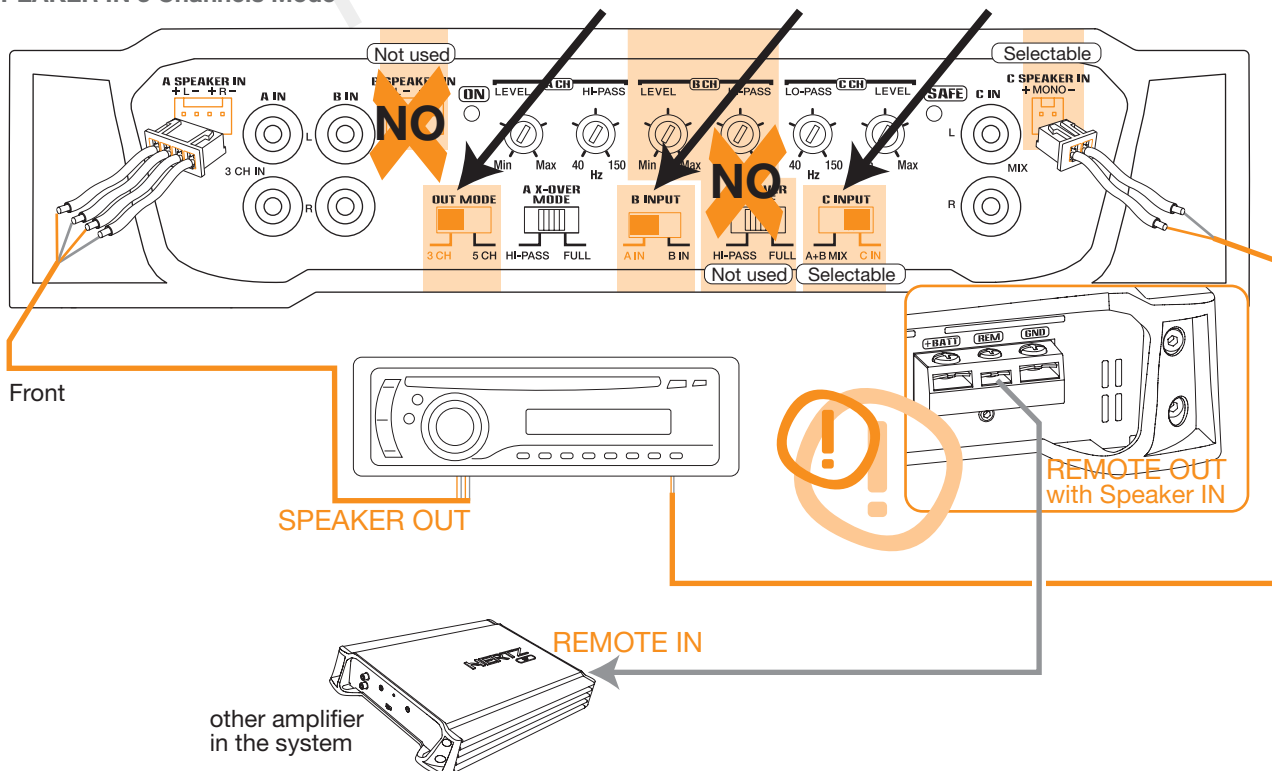


OUTPUTS

5 Channels Mode - Front / Rear / Sub

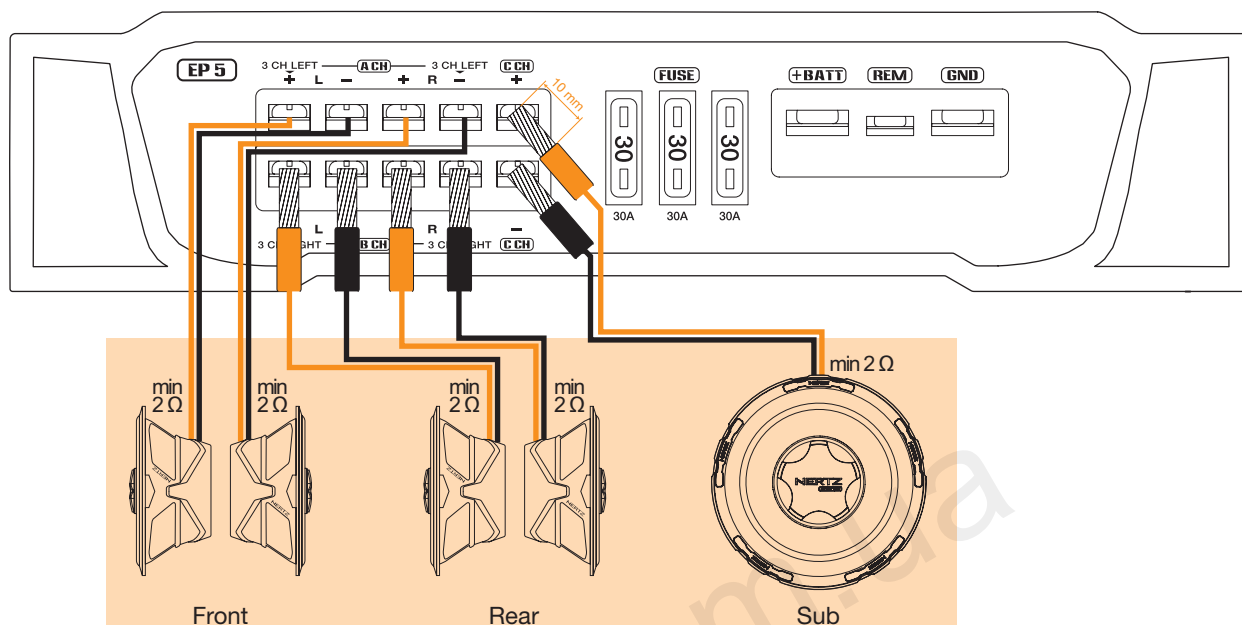

OUTPUTS

3 Channels Mode - Front / Sub

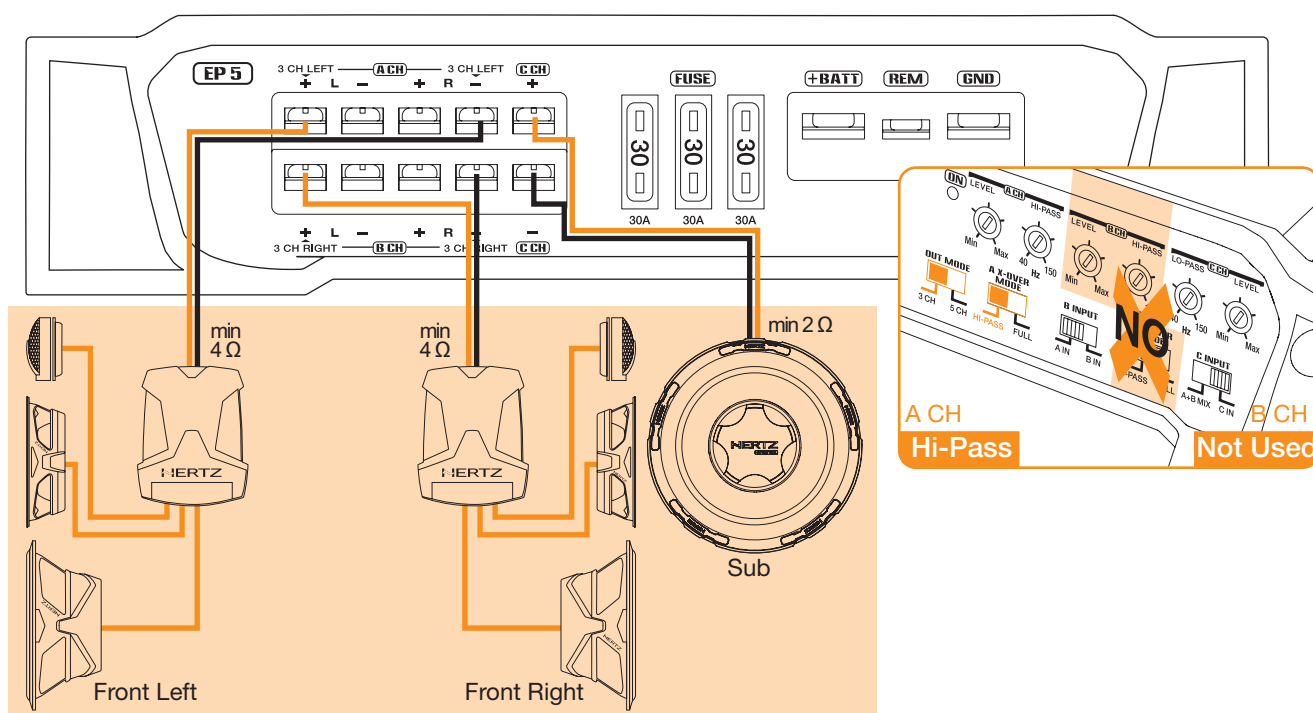

CONFIGURATION

Input configuration

3 Ch	Input	A Ch Mono	B Ch Mono	C Ch Mono
	A	A IN L	A IN R	A IN
	A+C	A IN L	A IN R	C IN

5 Ch	Input	A Ch Stereo	B Ch Stereo	C Ch Mono
	A	A IN	A IN	A IN
	A+C	A IN	A IN	C IN
	A+B	A IN	B IN	A+B IN
	A+B+C	A IN	B IN	C IN

Filter configuration

Config.	A Ch	B Ch	C Ch
1			
2			
3			
4			
5		B Filter Not used	
6		B Filter Not used	

TECHNICAL SPECIFICATIONS

Power Supply

Voltage	11÷15 VDC
Minimum idling current	1.5 A
Idling current when off	0.04 mA
Consumption @ 2Ω; 14.4 VDC (MAX Musical Power)	44 A
Remote IN Voltage	6÷15 VDC (1 mA)
Internal fuse	3 x 30 A

Amplifier stage

Bandwidth A & B Ch (-3dB)	7÷60k Hz
Bandwidth C Ch (-3dB)	7÷150 Hz
Distortion - THD (1 kHz @ 4 Ω)	0.09%
S/N Ration A & B Ch (weighted A @ 1 V)	98 dB
S/N Ration C Ch (weighted A @ 1 V)	102 dB
Damping factor A & B Ch (1 kHz @ 4 Ω)	100
Damping factor C Ch (1 kHz @ 4 Ω)	200
Input sensitive (PRE IN)	0.3÷5 V
Input sensitive (Speaker IN)	1.4÷24 V
Input impedance (PRE IN)	15 kΩ
Input impedance (Speaker IN)	5 kΩ
Load impedance (MIN)	
5 Ch	4 x 2Ω + 1 x 2Ω
3 Ch	2 x 4Ω + 1 x 2Ω
Output Power (RMS) @ 14.4 VDC; THD 1%	
5 Ch	60 W x 4 + 160 W x 1(4Ω)
5 Ch	95 W x 4 + 250 W x 1(2Ω)
3 Ch	190 W x 2 (4Ω) + 160 W x 1(4Ω)
3 Ch	190 W x 2 (4Ω) + 250 W x 1(2Ω)

Inputs / Outputs / Filters

Input	PRE / Speaker
AMP Filter	
A Ch	Full / Hi-pass 40÷150Hz@12dB/Oct.
B Ch	Full / Hi-pass 40÷150Hz@12dB/Oct.
C Ch	Lo-pass 40÷150Hz@24dB/Oct.
Other Functions	
ART	Automatic Remote Turn-On/Off with Speaker-In

Size

B x L x H	mm	240 x 450 x 54
	inches	9 ^{15/32} x 17 ^{23/32} x 2 ^{5/32}
Weight	kg	4,80
	lb	10.58