



PHONES

0 (800) 800 130
(050) 462 0 130
(063) 462 0 130
(067) 462 0 130

130
COM.UA

Internet store of
autogoods



SKYPE

km-130

CAR RECEIVERS — Receivers • Media receivers and stations • Native receivers • CD/DVD changers • FM-modulators/USB adapters • Flash memory • Facia plates and adapters • Antennas • Accessories |
CAR AUDIO — Car audio speakers • Amplifiers • Subwoofers • Processors • Crossovers • Headphones • Accessories | TRIP COMPUTERS — Universal computers • Model computers • Accessories |
GPS NAVIGATORS — Portable GPS • Built-in GPS • GPS modules • GPS trackers • Antennas for GPS navigators • Accessories | VIDEO — DVR • TV sets and monitors • Car TV tuners • Cameras • Videomodules
• Transcoders • Car TV antennas • Accessories | SECURITY SYSTEMS — Car alarms • Bike alarms • Mechanical blockers • Immobilizers • Sensors • Accessories | OPTIC AND LIGHT — Xenon • Bixenon • Lamps
• LED • Stroboscopes • Optic and Headlights • Washers • Light, rain sensors • Accessories | PARKTRONICS AND MIRRORS — Rear parktronic • Front parktronic • Combined parktronic • Rear-view mirrors
• Accessories | HEATING AND COOLING — Seat heaters • Mirrors heaters • Screen-wipers heaters • Engine heaters • Auto-refrigerators • Air conditioning units • Accessories | TUNING — Vibro-isolation
• Noise-isolation • Tint films • Accessories | ACCESSORIES — Radar-detectors • Handsfree, Bluetooth • Windowlifters • Compressors • Beeps, loudspeakers • Measuring instruments • Cleaners • Car seats
• Miscellaneous | MOUNTING — Installation kits • Upholstery • Grilles • Tubes • Cable and wire • Tools • Miscellaneous | POWER — Batteries • Converters • Start-charging equipment • Capacitors
• Accessories | MARINE AUDIO AND ELECTRONICS — Marine receivers • Marine audio speakers • Marine subwoofers • Marine amplifiers • Accessories | CAR CARE PRODUCTS — Additives • Washer fluid •
Care accessories • Car polish • Flavors • Adhesives and sealants | LIQUID AND OIL — Motor oil • Transmission oil • Brake fluid • Antifreeze • Technical lubricant



In store "130" you can find and buy almost all necessary goods for your auto in Kyiv and other cities, delivery by ground and postal services. Our experienced consultants will provide you with exhaustive information and help you to choose the very particular thing. We are waiting for you at the address

<https://130.com.ua>

SYSTEM

ESK 130.5 225 W

Technical Specifications

| Component | - | Two way system |
|-----------------------------------|------------------------|----------------------------------|
| Woofer size | mm (in.) | 130 (5) |
| Tweeter diaphragm | mm (in.) | 26 (1) |
| Power handling | W peak W continuous | 225 75 |
| Impedance | Ω | 4 |
| Frequency response | Hz | 70 ÷ 23k |
| Sensitivity | dB SPL | 93 |
| Woofer magnet size D-d-h | mm (in.) | 80 x 32 x 13 (3.15 x 1.26 x 0.5) |
| Tweeter magnet size D-d-h | mm (in.) | 19 x 3 (0.75 x 0.12) |
| Woofer voice coil \varnothing | mm (in.) | 25 (1) |
| Tweeter voice coil \varnothing | mm (in.) | 20 (0.8) |
| Woofer magnet | - | High density flux ferrite |
| Tweeter magnet | - | Neodymium |
| Woofer cone | - | Water repellent pressed paper |
| Tweeter dome | - | Tetolon |
| Crossover type | - | LP/HP @ 3 kHz - 6/12 dB Oct. |
| Component adjustment | dB | +2; 0; -2 |
| Woofer weight of one component | kg (lb.) | 0,7 (1.54) |
| Tweeter weight of one component | kg (lb.) | 0,03 (0.07) |
| Crossover weight of one component | kg (lb.) | 0,17 (0.37) |

Electro-Acoustic Parameters

| | | Tweeter | Woofer |
|------|----------|---------|--------|
| D | mm | 20 | 110 |
| Xmax | mm | - | 3 |
| Re | Ω | 3,7 | 3,1 |
| Fs | Hz | 1350 | 82 |
| Le | mH | 0,02 | 0,18 |
| Vas | l | - | 6,05 |
| Mms | g | 0,19 | 7,9 |
| Cms | mm/N | 0,07 | 0,47 |
| BL | T-m | 1,5 | 4 |
| Qts | - | 0,9 | 0,68 |
| Qes | - | 2,7 | 0,8 |
| Qms | - | 1,5 | 4,6 |
| Spl | dB | 92 | 93 |



ET 26.5

1. Tetolon dome, with hemispheric profile and wide roll surround; extremely light weight and properly damped for smooth and extended high frequency response.
2. Acoustic compression chamber; high efficiency and off-axis optimized response.
3. CCAW (Copper Clad Aluminium Wire) ultra light ferrofluid-cooled mobile voice coil.
4. High energy neodymium magnet.
5. Low carbon content plates for maximum magnetic permeability and high heat dissipation.
6. Damping material; controlling acoustic resonances insuring clear, high frequenc tones.

EV 130.5



1. V-cone® for best off-axis response and clear mid-high frequency detail.
2. Water-repellent treated paper cone; butyl rubber surround.
3. Pure copper voice coil, wound on aluminium former, for exceptional thermal and mechanical capacity.
4. Large motor assembly for excellent control of voice coil.
5. Low carbon content plates for maximum magnetic permeability and high heat dissipation.
6. Rubber magnet cover provides damping to the basket and motor structure and protects from abrasions and damages.
7. DIN size basket coated with scratch-proof, corrosive-resistant material.
8. Tin-plated, high current terminals.
9. Silver-plated lead wires, for maximum reliability and conductivity.
10. Epoxy glue for basket and motor system provides perfect coupling.
11. Curve memory Nomex spider for consistent, reliable performance.

- Tweeter mounting accessories and woofer grille included


SYSTEM energy

ESK 130.5 225W



| | | |
|----|--------|----------|
| A | 130 mm | 5.12 in. |
| A3 | 150 mm | 5.9 in. |
| B | 119 mm | 4.68 in. |
| C | 57 mm | 2.24 in. |
| D | 50 mm | 1.96 in. |

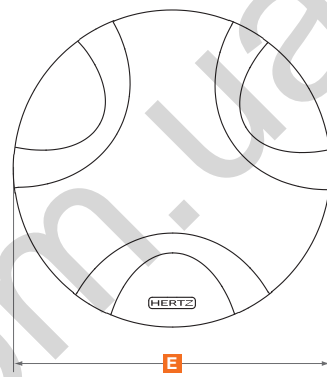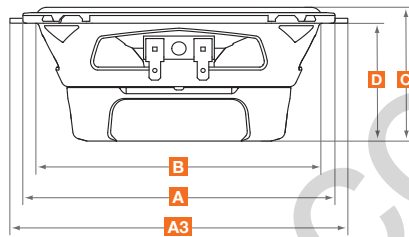




| | | |
|---|--------|----------|
| E | 164 mm | 6.45 in. |
| F | 24 mm | 0.94 in. |



| | | |
|---|----------|----------|
| G | 102,5 mm | 4.03 in. |
| H | 82 mm | 3.23 in. |
| I | 34 mm | 1.34 in. |



| | | |
|---|---------|----------|
| A | 44 mm | 1.7 in. |
| B | 38,5 mm | 1.5 in. |
| C | 20 mm | 0.78 in. |
| D | 8,5 mm | 0.33 in. |



| | | |
|---|---------|----------|
| K | 28,3 mm | 1.11 in. |
| J | 44,3 mm | 1.75 in. |
| R | 48 mm | 1.89 in. |
| S | 10 mm | 0.4 in. |
| T | 10 mm | 0.4 in. |

