



0 (800) 800 130
(050) 462 0 130
(063) 462 0 130
(067) 462 0 130

130
COM.UA

Internet store of autogoods



km-130

CAR RECEIVERS — Receivers • Media receivers and stations • Native receivers • CD/DVD changers • FM-modulators/USB adapters • Flash memory • Face plates and adapters • Antennas • Accessories | CAR AUDIO — Car audio speakers • Amplifiers • Subwoofers • Processors • Crossovers • Headphones • Accessories | TRIP COMPUTERS — Universal computers • Model computers • Accessories | GPS NAVIGATORS — Portable GPS • Built-in GPS • GPS modules • GPS trackers • Antennas for GPS navigators • Accessories | VIDEO — DVR • TV sets and monitors • Car TV tuners • Cameras • Videomodules • Transcoders • Car TV antennas • Accessories | SECURITY SYSTEMS — Car alarms • Bike alarms • Mechanical blockers • Immobilizers • Sensors • Accessories | OPTIC AND LIGHT — Xenon • Bixenon • Lamps • LED • Stroboscopes • Optic and Headlights • Washers • Light, rain sensors • Accessories | PARKTRONICS AND MIRRORS — Rear parktronic • Front parktronic • Combined parktronic • Rear-view mirrors • Accessories | HEATING AND COOLING — Seat heaters • Mirrors heaters • Screen-wipers heaters • Engine heaters • Auto-refrigerators • Air conditioning units • Accessories | TUNING — Vibro-isolation • Noise-isolation • Tint films • Accessories | ACCESSORIES — Radar-detectors • Handsfree, Bluetooth • Windowlifters • Compressors • Beeps, loudspeakers • Measuring instruments • Cleaners • Carsits • Miscellaneous | MOUNTING — Installation kits • Upholstery • Grilles • Tubes • Cable and wire • Tools • Miscellaneous | POWER — Batteries • Converters • Start-charging equipment • Capacitors • Accessories | MARINE AUDIO AND ELECTRONICS — Marine receivers • Marine audio speakers • Marine subwoofers • Marine amplifiers • Accessories | CAR CARE PRODUCTS — Additives • Washer fluid • Care accessories • Car polish • Flavors • Adhesives and sealants | LIQUID AND OIL — Motor oil • Transmission oil • Brake fluid • Antifreeze • Technical lubricant



In store "130" you can find and buy almost all necessary goods for your auto in Kyiv and other cities, delivery by ground and postal services. Our experienced consultants will provide you with exhaustive information and help you to chose the very particular thing. We are waiting for you at the address

<https://130.com.ua>

SYSTEM

ESK 163L.5 375W

Technical Specifications

Component	-	Three way system
Woofer size	mm (in.)	165 (6.5)
Midwoofer size	mm (in.)	100 (4)
Tweeter diaphragm	mm (in.)	26 (1)
Power handling	W peak W continuous	375 125
Impedance	Ω	4
Frequency response	Hz	50 ÷ 23k
Sensitivity	dB SPL	92
Woofer magnet size D-d-h	mm (in.)	85 x 32 x 17 (3.55 x 1.26 x 0.7)
Midwoofer magnet size D-d-h	mm (in.)	70 x 32 x 10 (2.7 x 1.26 x 0.4)
Tweeter magnet size D-d-h	mm (in.)	19 x 3 (0.75 x 0.12)
Woofer voice coil Ø	mm (in.)	25 (1)
Midwoofer voice coil Ø	mm (in.)	25 (1)
Tweeter voice coil Ø	mm (in.)	20 (0.8)
Woofer magnet	-	High density flux ferrite
Midwoofer magnet	-	High density flux ferrite
Tweeter magnet	-	Neodymium
Woofer cone	-	Water repellent non pressed paper
Midwoofer cone	-	Water repellent pressed paper
Tweeter dome	-	Tetolon
Crossover type	LP/BP/HP @ 600 Hz - 12/6 dB Oct. 6 kHz - 6/12 dB Oct.	
Component adjustment	dB	+2; 0; -2
Woofer weight of one component	kg (lb.)	0,98 (2.16)
Midwoofer weight of one component	kg (lb.)	0,45 (0.99)
Tweeter weight of one component	kg (lb.)	0,03 (0.07)
Crossover weight of one component	kg (lb.)	0,42 (0.93)

Electro-Acoustic Parameters

		Tweeter	Midwoofer	Woofer
D	mm	20	88	134
Xmax	mm	-	1,5	3
Re	Ω	3,7	3	3,3
Fs	Hz	1350	104	65
Le	mH	0,02	0,15	0,21
Vas	l	-	2,3	11
Mms	g	0,19	5,3	14,8
Cms	mm/N	0,07	0,44	0,38
BL	T-m	1,5	3,5	4,8
Qts	-	0,9	0,68	0,72
Qes	-	2,7	0,87	0,88
Qms	-	1,5	3,1	3,8
Spl	dB	92	91	92



ET 26.5

1. Tetolon dome, with hemispheric profile and wide roll surround; extremely light weight and properly damped for smooth and extended high frequency response.
2. Acoustic compression chamber; high efficiency and off-axis optimized response.
3. CCAW (Copper Clad Aluminium Wire) ultra light ferrofluid-cooled mobile voice coil.
4. High energy neodymium magnet.
5. Low carbon content plates for maximum magnetic permeability and high heat dissipation.
6. Damping material; controlling acoustic resonances insuring clear, high frequency tones.

EMV 100.5

1. V-cone® for best off-axis response and clear mid-high frequency detail.
2. Water-repellent treated paper cone; butyl rubber surround.
3. Pure copper voice coil, wound on aluminium former, for exceptional thermal and mechanical capacity.
4. Large motor assembly for excellent control of voice coil.
5. Low carbon content plates for maximum magnetic permeability and high heat dissipation.
6. Rubber magnet cover provides damping to the basket and motor structure and protects from abrasions and damages.
7. DIN size basket coated with scratch-proof, corrosive-resistant material.
8. Tin-plated, high current terminals.
9. Silver-plated lead wires, for maximum reliability and conductivity.
10. Epoxy glue for basket and motor system provides perfect coupling.
11. Curve memory Nomex spider for consistent, reliable performance.

EV 165L.5



1. V-cone® for best off-axis response and clear mid-high frequency detail.
2. Water-repellent non-pressed paper cone provides deep, tight and dynamic bass output.
3. Pure copper voice coil, wound on aluminium former, for very good thermal and mechanical capacity.
4. Large motor assembly for excellent mobile voice coil control.
5. Low carbon content plates for maximum magnetic permeability and high heat dissipation.
6. Rubber magnet cover provides damping to the basket and motor structure and protects from abrasions and damages.
7. DIN size basket coated with scratch-proof, corrosive-resistant material.
8. Tin-plated, high current terminals.
9. Silver-plated lead wires, for maximum reliability and conductivity.
10. Epoxy glue for basket and motor system provides perfect coupling.
11. Curve memory Nomex spider for consistent, reliable performance.

- Tweeter mounting accessories and woofer grille included

SYSTEM energy



ESK 163L.5 375W

A	165 mm	6.5 in.
B	142 mm	5.6 in.
C	72 mm	2.83 in.
D	65 mm	2.56 in.

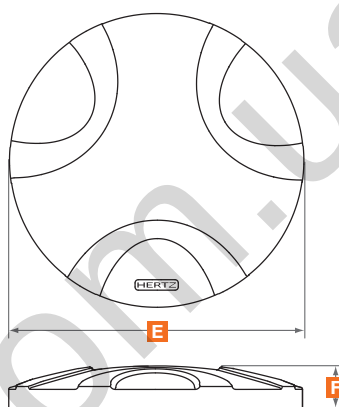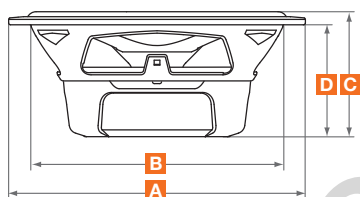



E	184 mm	7.25 in.
F	25 mm	0.98 in.

A	103 mm	4 in.
A3	130 mm	5.12 in.
B	93 mm	3.66 in.
C	49 mm	1.93 in.
D	44 mm	1.73 in.






E	141 mm	5.55 in.
F	22 mm	0.86 in.

G	138,5 mm	5.45 in.
H	109,8 mm	4.32 in.
I	41 mm	1.61 in.



A	44 mm	1.7 in.
B	38,5 mm	1.5 in.
C	20 mm	0.78 in.
D	8,5 mm	0.33 in.



K	28,3 mm	1.11 in.
J	44,3 mm	1.75 in.
R	48 mm	1.89 in.
S	10 mm	0.4 in.
T	10 mm	0.4 in.