



PHONES

(044) 360-7-130
(050) 336-0-130
(063) 788-0-130
(067) 233-0-130
(068) 282-0-130

130 Internet store of autogoods

COM.UA



ICQ
294-0-130
597-0-130

SKYPE
km-130

CAR RECEIVERS — Receivers • Media receivers and stations • Native receivers • CD/DVD changers • FM-modulators/USB adapters • Flash memory • Facia plates and adapters • Antennas • Accessories | CAR AUDIO — Car audio speakers • Amplifiers • Subwoofers • Processors • Crossovers • Headphones • Accessories | TRIP COMPUTERS — Universal computers • Model computers • Accessories | GPS NAVIGATORS — Portable GPS • Built-in GPS • GPS modules • GPS trackers • Antennas for GPS navigators • Accessories | VIDEO — DVR • TV sets and monitors • Car TV tuners • Cameras • Videomodules • Transcoders • Car TV antennas • Accessories | SECURITY SYSTEMS — Car alarms • Bike alarms • Mechanical blockers • Immobilizers • Sensors • Accessories | OPTIC AND LIGHT — Xenon • Bixenon • Lamps • LED • Stroboscopes • Optic and Headlights • Washers • Light, rain sensors • Accessories | PARKTRONICS AND MIRRORS — Rear parktronic • Front parktronic • Combined parktronic • Rear-view mirrors • Accessories | HEATING AND COOLING — Seat heaters • Mirrors heaters • Screen-wipers heaters • Engine heaters • Auto-refrigerators • Air conditioning units • Accessories | TUNING — Vibro-isolation • Noise-isolation • Tint films • Accessories | ACCESSORIES — Radar-detectors • Handsfree, Bluetooth • Windowlifters • Compressors • Beeps, loudspeakers • Measuring instruments • Cleaners • Carsits • Miscellaneous | MOUNTING — Installation kits • Upholstery • Grilles • Tubes • Cable and wire • Tools • Miscellaneous | POWER — Batteries • Converters • Start-charging equipment • Capacitors • Accessories | MARINE AUDIO AND ELECTRONICS — Marine receivers • Marine audio speakers • Marine subwoofers • Marine amplifiers • Accessories | CAR CARE PRODUCTS — Additives • Washer fluid • Care accessories • Car polish • Flavors • Adhesives and sealants | LIQUID AND OIL — Motor oil • Transmission oil • Brake fluid • Antifreeze • Technical lubricant



In store "130" you can find and buy almost all necessary goods for your auto in Kyiv and other cities, delivery by ground and postal services. Our experienced consultants will provide you with exhaustive information and help you to chose the very particular thing. We are waiting for you at the address

<http://130.com.ua>

SYSTEM diECi

DSK170.3 160W



Technical Specifications

Component	-	Two way system
Woofer size	mm (in.)	170 (6.7)
Tweeter size	mm (in.)	24 (0.9)
Power handling	W peak	160
	W continuous	80
Impedance	Ω	4
Frequency response	Hz	50 ÷ 23k
Sensitivity	dB SPL	93
Woofer Magnet size D-d-h	mm (in.)	80 x 32 x 10 (3.1 x 1.3 x 0.4)
Woofer Voice coil \varnothing	mm (in.)	25 (1.0)
Woofer magnet	-	High density flux ferrite
Tweeter magnet	-	Neodymium
Woofer cone	-	Water-repellent pressed paper
Tweeter dome	-	PEI
Woofer weight	kg (lb.)	0,53 (1.17)
Tweeter weight	kg (lb.)	0,03 (0.07)
Crossover weight	kg (lb.)	0,16 (0.35)
Crossover	-	Hi Pass
Crossover cut off	-	3,5 kHz @ 12 dB Oct.

Electro-Acoustic Parameters


		Tweeter	Woofer
D	mm	24	133
Xmax	mm	-	2
Re	Ω	3,3	3,6
Fs	Hz	2800	79
Le	mH @ 1 kHz	0,3	0,26
Le	mH @ 10 kHz	0,04	0,18
Vas	l	-	11,3
Mms	g	-	10
Cms	mm/N	-	0,4
BL	T-m	-	3,9
Qts	-	-	0,96
Qes	-	-	1,15
Qms	-	-	5,78
Spl	dB	94	93

DT 24.3


1. 24 mm PEI dome-cone tweeter.
2. High efficiency annular acoustic lens.
3. High energy neodymium magnet.
4. Mounting accessories for external or embedded mounting included.

DV 170.3

1. Large motor assembly for mobile voice coil control.
2. Pure copper voice coil, wound on conex former, for maximum lightness.
3. V-cone® for best off-axis response, clear mid-high frequency detail and powerful bass.
4. TPU surround, for wide excursion and resonance damping.
5. DIN size basket protected by abrasion-proof dust paint.
6. Tin-plated, high current terminals.
7. Silver-plated lead wires for maximum reliability and conductivity.
8. Epoxy glue for basket and motor system provides perfect coupling.
9. Low carbon content plates for maximum magnetic permeability and high heat dissipation.

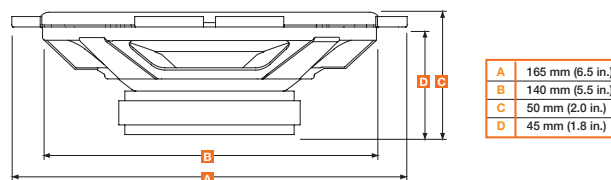

A	34 mm (1.3 in.)
B	-
C	20 mm (0.8 in.)
D	13 mm (0.5 in.)



G	75 mm (3.0 in.)
H	45 mm (1.8 in.)
I	21 mm (0.8 in.)

