



PHONES

(044) 360-7-130
(050) 336-0-130
(063) 788-0-130
(067) 233-0-130
(068) 282-0-130

130 Internet store of autogoods

COM.UA



ICQ
294-0-130
597-0-130

SKYPE
km-130

CAR RECEIVERS — Receivers • Media receivers and stations • Native receivers • CD/DVD changers • FM-modulators/USB adapters • Flash memory • Facia plates and adapters • Antennas • Accessories | CAR AUDIO — Car audio speakers • Amplifiers • Subwoofers • Processors • Crossovers • Headphones • Accessories | TRIP COMPUTERS — Universal computers • Model computers • Accessories | GPS NAVIGATORS — Portable GPS • Built-in GPS • GPS modules • GPS trackers • Antennas for GPS navigators • Accessories | VIDEO — DVR • TV sets and monitors • Car TV tuners • Cameras • Videomodules • Transcoders • Car TV antennas • Accessories | SECURITY SYSTEMS — Car alarms • Bike alarms • Mechanical blockers • Immobilizers • Sensors • Accessories | OPTIC AND LIGHT — Xenon • Bixenon • Lamps • LED • Stroboscopes • Optic and Headlights • Washers • Light, rain sensors • Accessories | PARKTRONICS AND MIRRORS — Rear parktronic • Front parktronic • Combined parktronic • Rear-view mirrors • Accessories | HEATING AND COOLING — Seat heaters • Mirrors heaters • Screen-wipers heaters • Engine heaters • Auto-refrigerators • Air conditioning units • Accessories | TUNING — Vibro-isolation • Noise-isolation • Tint films • Accessories | ACCESSORIES — Radar-detectors • Handsfree, Bluetooth • Windowlifters • Compressors • Beeps, loudspeakers • Measuring instruments • Cleaners • Carsits • Miscellaneous | MOUNTING — Installation kits • Upholstery • Grilles • Tubes • Cable and wire • Tools • Miscellaneous | POWER — Batteries • Converters • Start-charging equipment • Capacitors • Accessories | MARINE AUDIO AND ELECTRONICS — Marine receivers • Marine audio speakers • Marine subwoofers • Marine amplifiers • Accessories | CAR CARE PRODUCTS — Additives • Washer fluid • Care accessories • Car polish • Flavors • Adhesives and sealants | LIQUID AND OIL — Motor oil • Transmission oil • Brake fluid • Antifreeze • Technical lubricant



In store "130" you can find and buy almost all necessary goods for your auto in Kyiv and other cities, delivery by ground and postal services. Our experienced consultants will provide you with exhaustive information and help you to chose the very particular thing. We are waiting for you at the address

<http://130.com.ua>

HERTZ

is a division of ELETTROMEDIA - 62018 Potenza Picena (MC) Italy - Tel. +39 0733 870 870 - Fax +39 0733 870 880 - www.elettromedia.it

Technology - Art - Sound
Manufactured by
elettromedia Italy



HERTZ Awards

Technology Art Sound
Manufactured by
elettromedia Italy

S

- 1_MILLE
- 2_HI-ENERGY
- 3_ENERGY
- 4_DIECI
- 5_ACCESSORIES
- 6_ELECTRONICS
- S_SPACE




SPACE

IT'S REAL X³ (Slim + Light + Powerful)

www.hertzaudiovideo.com

HERTZ



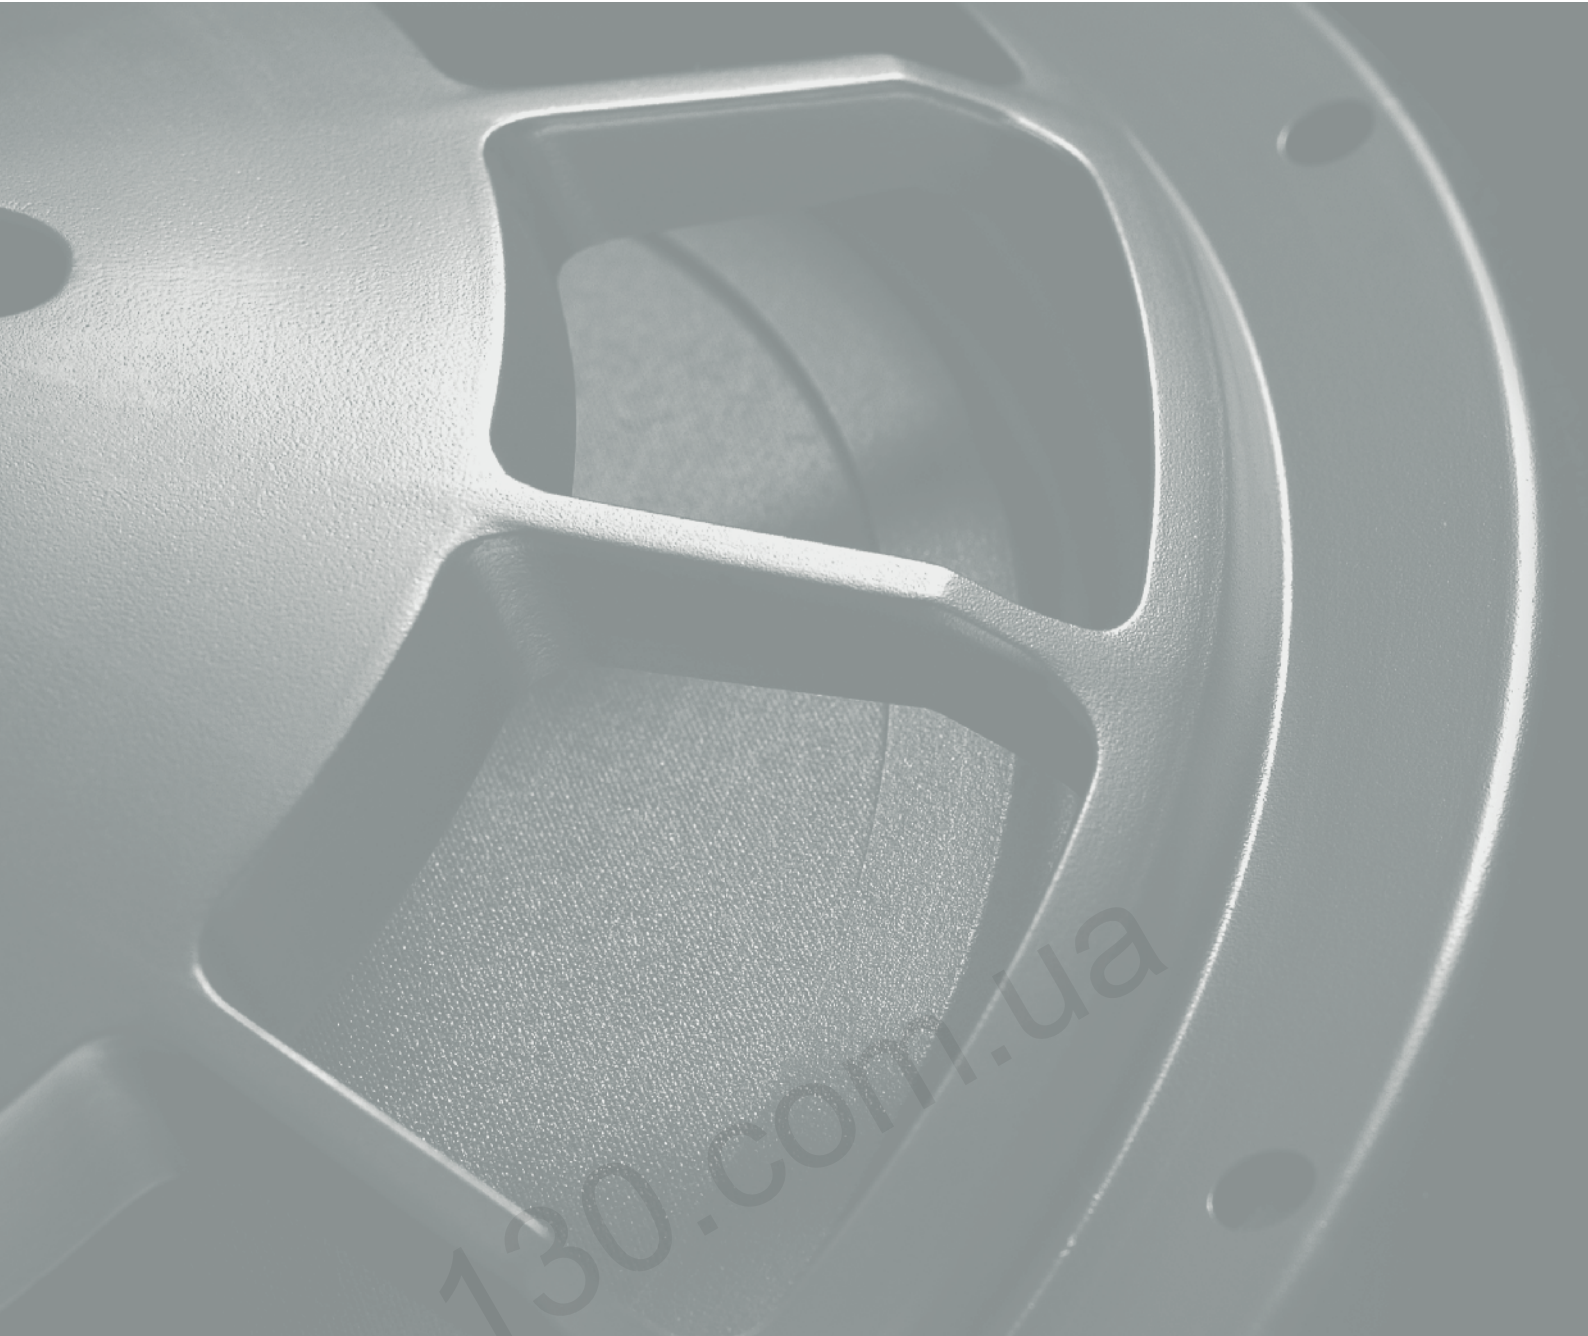

SPACE

IT'S REAL X³ (Slim + Light + Powerful)



SPACE

IT'S REAL X³ (Slim + Light + Powerful)



CDC [®]	Cylindrical Dust Cover[®]	Movement and Extension
DWR [®]	Double Wave Rubber Surround[®]	Linearity and Excursion
Polycotton [®]	Polycotton[®]	Rationality and Functionality
SC ² B [®]	Silver Copper Cotton Braid[®]	Elasticity and Sturdiness
PB [®]	Polymer Basket[®]	Lightness and Stiffness
BFLR [®]	Back Face Low Reflection[®]	Aerodynamics and Progress
RCD [®]	Radial Cooling Ducts[®]	Transfer and Geometry
SFE [®]	Symmetrical Field Engine[®]	Innovation and Energy
REN [®]	Rare Earth Neodymium[®]	Compactness and Power
CRP [®]	Copper Ring Pole[®]	Efficacy and Technics
BAS [®]	Back Aluminium Heat Sink[®]	Thermodynamics and Precision
BAF [®]	Black Aluminium Former[®]	Efficiency and Symmetry





HERTZ

SPACE L

IT'S REAL X³ (Slim + Light + Powerful)





CDC [®]	Cylindrical Dust Cover[®]	Refinement and Solution
HPC [®]	Hyperbolic Paper Cone[®]	Movement and Extension
DWR [®]	Double Wave Rubber Surround[®]	Linearity and Excursion
Polycotton [®]	Polycotton[®]	Rationality and Functionality
SC ² B [®]	Silver Copper Cotton Braid[®]	Elasticity and Sturdiness
PB [®]	Polymer Basket[®]	Lightness and Stiffness
BFLR [®]	Back Face Low Reflection[®]	Aerodynamics and Progress
RCD [®]	Radial Cooling Ducts[®]	Transfer and Geometry
SFE [®]	Symmetrical Field Engine[®]	Innovation and Energy
REN [®]	Rare Earth Neodymium[®]	Compactness and Power
CRP [®]	Copper Ring Pole[®]	Efficacy and Technics
BAF [®]	Black Aluminium Former[®]	Technology and Lightness



HERTZ



HERTZ

AS [®]	Attenuation System[®]	Simplicity and Control
BSC [®]	Best Sound Control[®]	Position and Perfection
TR [®]	Triple Resistor Heat Sink[®]	Uniqueness and Power
PC [®]	Polycarbonate Case[®]	Resistance and Beauty

SPACE

IT'S REAL X³ (Slim + Light + Powerful)



HTG [®]	High Transparency Protection Grille[®]	Protection and Transparency
Tetolon [®]	Tetolon Fiber[®]	Uniqueness and Landmark
CDV [®]	CCAW Duraluminium Voicecoil[®]	Technology and Lightness
SFE [®]	Symmetrical Field Engine[®]	Innovation and Energy
REN [®]	Rare Earth Neodymium[®]	Compactness and Power
CRP [®]	Copper Ring Pole[®]	Efficacy and Technics
RVH [®]	Radial Venting Holes[®]	Transfer and Geometry
BSB [®]	Back Sealed Box[®]	Versatility and Performance



HERTZ

SPACE

IT'S REAL X³ (Slim + Light + Powerful)



Mounting accessories given with SPACE 1



SPACE 1

180 Watt
28 mm
Neodymium Tweeter
91 dB/SPL



1. Housing for factory locations as big as 100 mm
2. Flush housing
3. Surface housing
4. 30° wedge housing
5. 60° wedge housing



SPACE 6

200 Watt
165 mm
Neodymium Woofer
91 dB/SPL



SPACE 8

260 Watt
200 mm
Neodymium Woofer
92 dB/SPL



SPACE K6

250 Watt
165 mm
2 way system
91 dB/SPL



Mounting accessories and chambers



SPACE K8

300 Watt
200 mm
2 way system
92 dB/SPL




Mounting accessories and chambers



SPACE K6L

200 Watt
165 mm
2 way system
93 dB/SPL





Mounting accessories and chambers



SPACE K8L

250 Watt
200 mm
2 way system
93 dB/SPL



Mounting accessories and chambers


SPACE

IT'S REAL X³ (Slim + Light + Powerful)



Technical specifications	SPACE 1 big chamber	SPACE 1 small chamber	SPACE 6	SPACE 8	SPACE 6L	SPACE 8L	SPACE K6	SPACE K8	SPACE K6L	SPACE K8L
Component	Tweeter	Tweeter	Woofer	Woofer	Woofer	Woofer	2 way System	2 way System	2 way System	2 way System
Size mm (inch) woofer midrange tweeter	28 (1"1/8)	28 (1"1/8)	165 (6"1/2)	200 (8")	165 (6"1/2)	200 (8")	165 (6"1/2) 28 (1"1/8)	200 (8") 28 (1"1/8)	165 (6"1/2) 28 (1"1/8)	200 (8") 28 (1"1/2)
Power Handling Watt peak contin. program	180 180W@1.8KH	180 180W@2.0KH	200 100	260 130	160 80	200 100	250 125	300 150	200 100	250 125
Impedance ohm	4	4	4	4	4	4	4	4	4	4
Frequency response Hz	950 - 25k	1300 - 25k	45 - 5,5k	40 - 4,8k	45 - 5k	40 - 4k	45-25k	40-25k	45-25k	40-25k
Sensitivity dB/SPL	91	91	91	92	93	93	91	92	93	93
Voice coil diameter mm	28	28	50	50	36	36				
Magnet	Neodymium REN®	Neodymium REN®	Neodymium REN®	Neodymium REN®	Neodymium REN®	Neodymium REN®				
Cone / Dome	Tetolon Fiber®	Tetolon Fiber®	Water repellent pressed paper	Water repellent pressed paper	Water repellent pressed paper	Water repellent pressed paper				
Crossover included							2,8kHz 12/12 dB Oct.	2,8kHz 12/12 dB Oct.	2,8kHz 12/12 dB Oct.	2,8kHz 12/12 dB Oct.
Component Adjustment							Tweeter: +2, 0, -2 dB	Tweeter: +2, 0, -2 dB	Tweeter: +2, 0, -2 dB	Tweeter: +2, 0, -2 dB
Sound Control							BSC®	BSC®	BSC®	BSC®



Electro-Acoustic parameters	SPACE 1 big chamber	SPACE 1 small chamber	SPACE 6	SPACE 8	SPACE 6L	SPACE 8L
D mm	28	28	128	166	128	166
Xmax mm	0	0	3	3	3	3
Re ohm	3	3	3	3	3	3
Fs Hz	920	1200	72	66	68	68
Le mH@1kHz	0,75	0,69	0,37	0,43	0,43	0,44
Le mH@10kHz	0,04	0,04	0,1	0,1	0,16	0,16
Vas lit	0	0	6,12	14,2	10,4	18
Mms gr	0	0	18,3	26,5	12,4	20,15
Cms mm/N	0	0	0,26	0,22	0,45	0,28
BL T-m	0	0	6,47	6,77	4,3	4,62
Qts	0,41	1,09	0,55	0,66	0,76	0,98
Qes	0,9	1,86	0,6	0,74	0,85	1,2
Qms	0,75	2,65	7,34	6,15	6,93	5,25
Spl dB	91	91	91	92	93	93

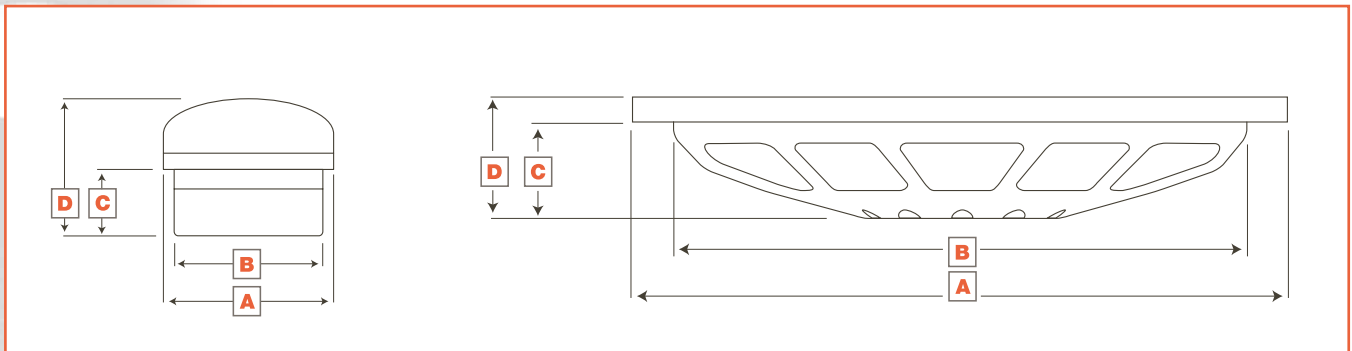

Technical specifications	SPACE 1 big chamber	SPACE 1 small chamber	SPACE 6	SPACE 8	SPACE 6L	SPACE 8L
Outer diameter mm	A 52	52	167	210	167	210
Mounting hole diameter mm	B 46	46	142	183	142	183
Mounting depth mm	C 35	26	47	51	47	51
Total depth mm	D 23	14	39	42	39	42
Weight of one component kg	0,085	0,079	0,640	0,760	0,320	0,440





Best Sound Control®

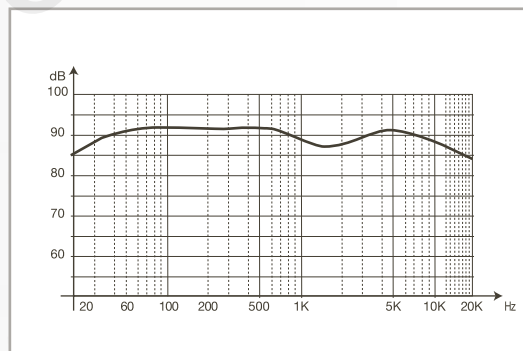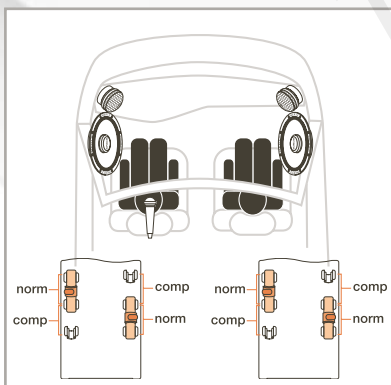

Standard System, BSC® off, both crossovers on norm

In standard installation conditions, the different position of Left and Right channels with regards to the listening point changes the width and phase of the perceived signal. You lose energy at high frequencies and the mid-frequency is slightly altered, too: sound is therefore unclear, as well as image is.

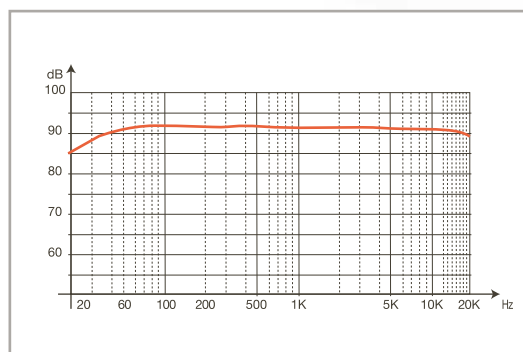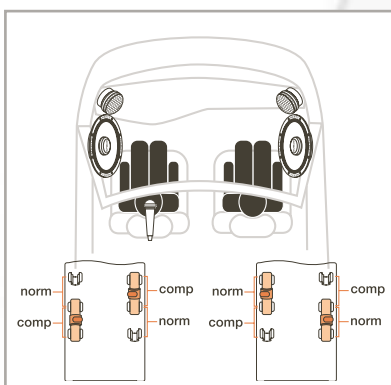

Driver alignment, left crossover on comp

If the two bridges of the left crossover are set on COMP and the ones of the right crossover are set on NORM, the left channel response is improved with regards to extension, sensitivity, phase and you get the same Ft as the right channel one. The sound image the driver perceives is in the center of the virtual stage; tonal accuracy gets colourless, clearer.

1_ Cylindrical Dust Cover®

Cylindrical paper dust cover. Its geometric structure doesn't create any breaks in the cone. The cylinder non-deformability stiffens the most delicate part of the cone and insures excellent acoustic results.

2_ Hyperbolic Paper Cone®

High pressure molded, water-repellent paper cone. Its special hyperbolic profile and its being fixed onto the surround stiffen the emitting device, increase the radiating surface and flatten high frequency response.

3_ Double Wave Rubber Surround®




Surround and integrated gasket are made of rubber, latex and silicone. The longest excursion which the double wave insures makes mobile voice coil movement more linear, eliminating dangerous mechanical distortions.

4_ Polycotton®

Acrylic and cotton spider with calibrated height. It mechanically controls musical signal reproduction without affecting it. The rationality, functionality and efficiency of materials insure long-term reliability and performances.

5_ Silver Copper Cotton Braid®

Silver copper and cotton braid. The very thick lead wire provides utmost mechanical reliability and avoids vibrations even at the longest excursions, supporting the cone movement perfect alignment.

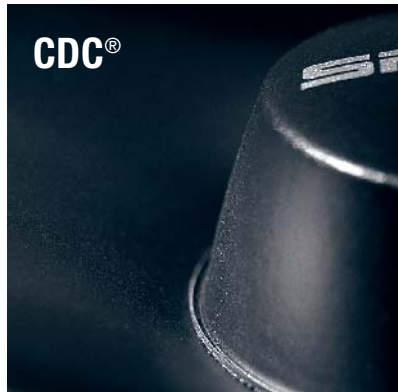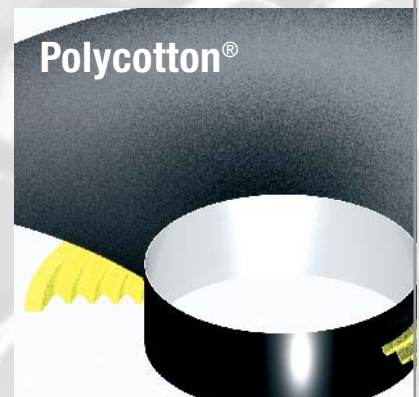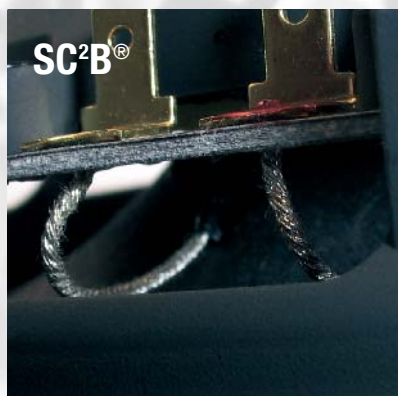**1** Refinement and Solution**2** Movement and Extension**3** Linearity and Excursion**4** Rationality and Functionality**5** Elasticity and Sturdiness

6_ Symmetrical Field Engine®

The motor assembly special shape creates perfect field symmetry which provides startling energy. Its small dimensions conceal the system total capacity, which can keep mobile voice coil movement linear even at the longest excursions.

Rare Earth Neodymium®

High thermal threshold neodymium. The powerful, exclusive magnet permeability is 100 times higher than the one of ordinary, equally big ferrites. SPACE double magnet is 20 times more efficient than a traditional woofer and it can provide extraordinary energy for superb performances.

Copper Ring Pole®

Pure copper covered central pole. The short circuit ring inside the voice coil insures linear impedance. The anti-inductive effect allows woofer to reach higher frequencies, providing flat, excellent mid-high frequencies response.

7_ Polymer Basket®

Anti-vibration composite polymers basket. Polycarbonate and fiber-glass make it very light, yet stiff and decrease resonance increasing damping factor.

8_ Back Face Low Reflection®

Low incidence basket arms. The distance between them creates wide ports for air flux. This original system provides membrane with minimum radiation impedance and eliminates noise and distortion.

SFE®
REN®
CRP®



6 Innovation and Energy

PB®



7 Lightness and Stiffness

BFLR®



8 Aerodynamics and Progress

9_ Radial Cooling Ducts®

Radial holes system. The forced ventilation circuit keeps voice coil at constant temperature, dissipating heat, and improves thermal capacity and power handling.

10_ Back Aluminium Heat Sink®

Anodised aluminium heat sink. The magnet is fixed onto a support which is turned through high precision process and which transfers heat from the magnet bottom pole outwards. This system favours the flux of the heat generated by the watts dissipated during musical reproduction, increasing maximum real power.




11_ Black Aluminium Former®

50 mm mobile voice coil, wound on two layers inside a Black Aluminium Former® with outstanding thermal and mechanical capacity. Windings precision and glues quality insure power handling, control and energy.

12_ Acoustically neutral grilles. They are designed in order to offer the best mechanical protection without sound coloration. Their central wrinkle makes them sturdier, without affecting the woofer mid frequencies reproduction.

13_ Black Aluminium Former®

CCAW copper covered aluminium wire, 36 mm mobile voice coil. Its three layers are wound inside a Black Aluminium Former®. The compact, very light winding provides maximum mechanical capacity and excellent efficiency.

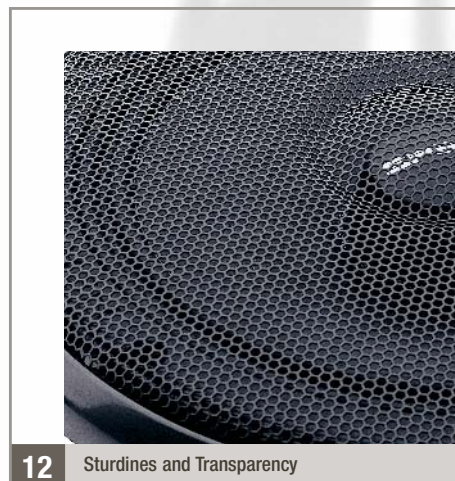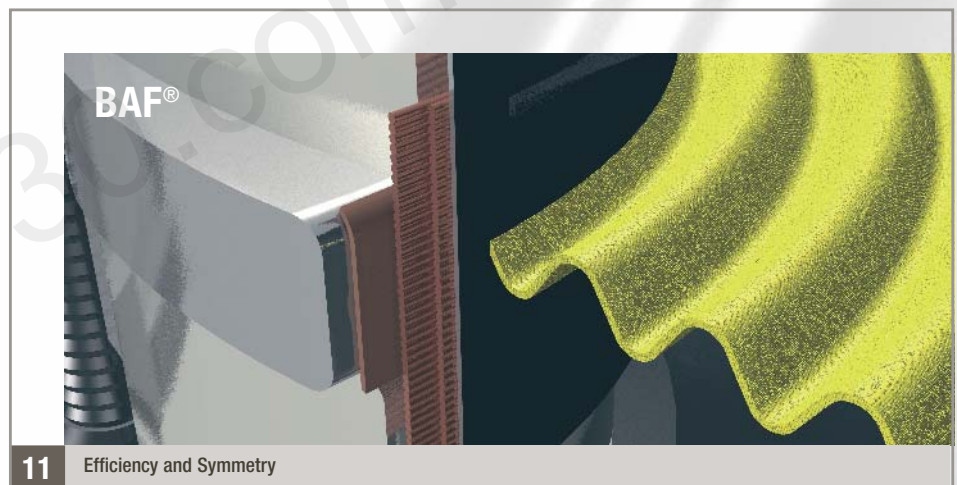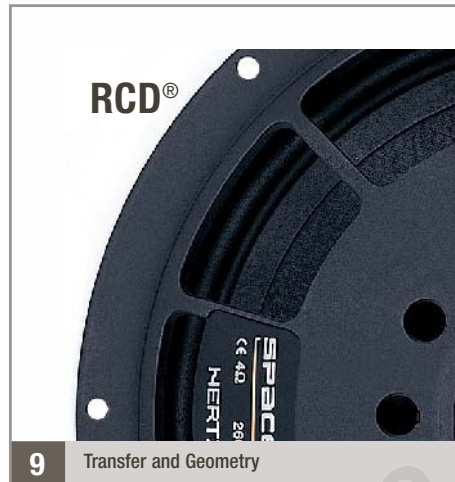

14 CCAW Duraluminium Voicecoil®

CCAW copper covered aluminium wire mobile voice coil, wound on two layers on a Duraluminium former. The use of special materials makes this mobile voice coil particularly light and stiff, insuring unparalleled SPL values and high frequency response.

15 Tetolon Fiber®

28 mm semispheric dome. Natural fiber is combined with a closed fiber with double waterproof coating and makes tweeter sound crisp yet soft. Outstanding frequency response, off-axis response and linearity are insured in whatever conditions.

16 Symmetrical Field Engine®

The motor assembly special shape creates perfect field symmetry which provides startling energy. Its small dimensions conceal the system total capacity, which can keep mobile voice coil movement linear even at the longest excursions.

Rare Earth Neodymium®

High thermal threshold neodymium. The powerful, exclusive magnet permeability is 100 times higher than the one of ordinary, equally big ferrites. SPACE 1 double magnet is 20 times more efficient than a traditional tweeter and it can provide extraordinary energy for superb performances.

Copper Ring Pole®

Pure copper short circuiting ring. The upper pole outside the voice coil generates an anti-inductive effect. By flattening impedance, it allows the tweeter to reach higher frequencies, providing even, excellent trebles response.

17 High Transparency Protection Grille®

Acoustically neutral protection grille. Designed as an integral part of the speaker, it both protects it and contributes to the achievement of the best acoustic results and performances.



18_ Back Sealed Box®


Acoustic chambers with different loading. The tweeter can be used in different configurations since it is possible to choose the best Q for one's system by changing the rear acoustic chamber. The chambers simulate sealed box configuration; they are filled with natural, non-woven absorbing material for the component best damping. The small chamber increases Q factor and makes the tweeter slope sharper; the big one makes slope smoother at lower frequencies.



18 Versatility and Performance

19_ Radial Venting Holes®


Cooling and decompression radial ducts. They insure efficient heat dissipation and optimise mobile voice coil damping and resonance. The holes special geometry and the rear resonance chamber provide natural, linear sound by eliminating all noise.

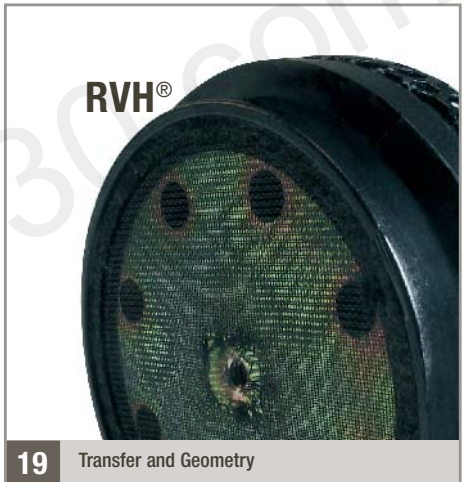

19 Transfer and Geometry

20_ Attenuation System®


Filters have tweeter sensitivity control. Thanks to the 2dB-step attenuators, the speaker can be adjusted at best in any cars and according to any needs.

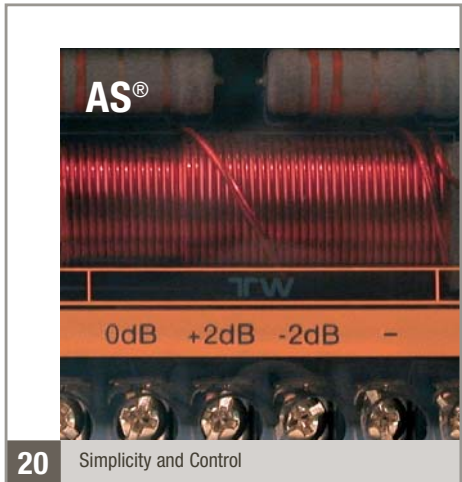

20 Simplicity and Control

21_ Best Sound Control®

Listening point optimisation system. The car compartment has fixed listening positions and the components forced installation sometimes places them at non favourable angulations. Thanks to BSC®, it is possible to adjust the speakers emission in order to make up for woofer and tweeter natural loss at high frequencies. Thus, the driver or the passenger will be able to fully enjoy the components best acoustic response simply by setting the right adjustment on the filter.

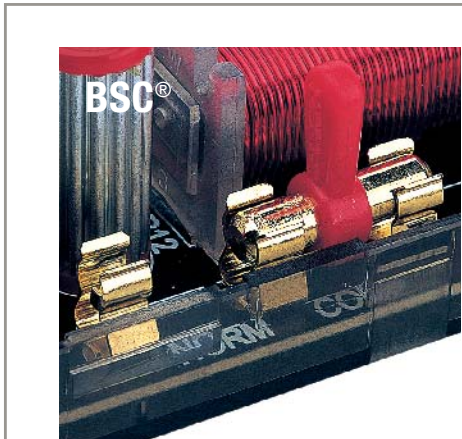

21 Position and Perfection

BEST SOUND CONTROL		
Listening position	X-over Left both switch	X-over Right both switch
Driver	comp	norm
Passenger	norm	comp
All	norm	norm


Switch Table Factory Setting: All

22. Components

Resistors: metaloxide, high power and precision, non inductive;
 Inductors: 1 mm copper coil, low resistance, high saturation flux;
 Capacitors: polyester film, 100 Vdc, very low DF;
 Layout: 1.7 mm shockproof FR2 with very thick pads.

Crossover Frequency

Cut-off frequencies have been chosen for the best acoustic crossover point. The study of the reverberating field in cars, which interacts with the system response, recommended the use of open electrical cuts with optimised damping. Attenuation slopes are 12dB/Oct.

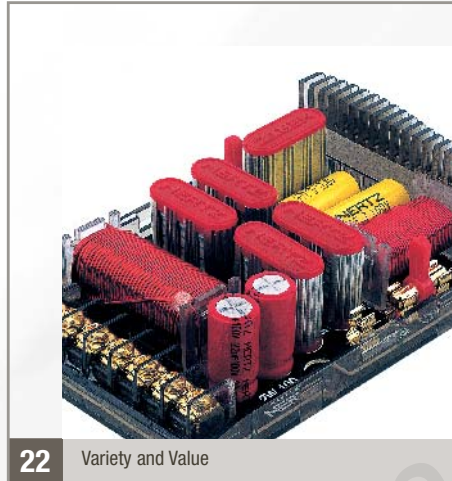

22 Variety and Value

23. Triple Resistor Heat Sink®


Aluminium heat sink for resistors. Metaloxide resistors are assembled on a special heat sink which improves their performances and power handling. Heat dissipation and the consequent stabilisation of the resistors working temperature avoid dangerous value and temperature variations, optimising acoustic results.

24. Polycarbonate Case®

The filter housing, with hidden fixing system, is made of translucent polycarbonate, polymeric material with the best thermal resistance.



23 Uniqueness and Power

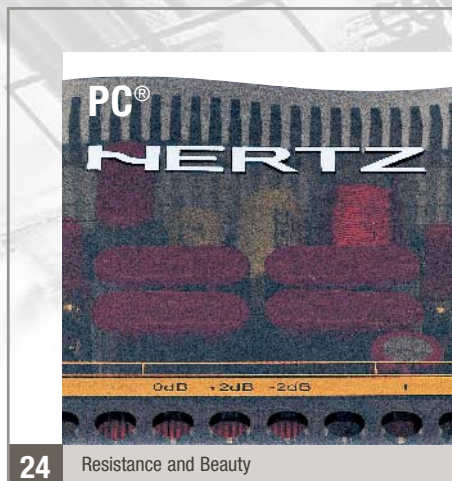

24 Resistance and Beauty