



PHONES

(044) 360-7-130
 (050) 336-0-130
 (063) 788-0-130
 (067) 233-0-130
 (068) 282-0-130

130

COM.UA

Internet store of autogoods



ICQ

294-0-130
 597-0-130


SKYPE
 km-130

CAR RECEIVERS — Receivers • Media receivers and stations • Native receivers • CD/DVD changers • FM-modulators/USB adapters • Flash memory • Facia plates and adapters • Antennas • Accessories |
 CAR AUDIO — Car audio speakers • Amplifiers • Subwoofers • Processors • Crossovers • Headphones • Accessories | TRIP COMPUTERS — Universal computers • Model computers • Accessories |
 GPS NAVIGATORS — Portable GPS • Built-in GPS • GPS modules • GPS trackers • Antennas for GPS navigators • Accessories | VIDEO — DVR • TV sets and monitors • Car TV tuners • Cameras • Videomodules • Transcoders • Car TV antennas • Accessories | SECURITY SYSTEMS — Car alarms • Bike alarms • Mechanical blockers • Immobilizers • Sensors • Accessories | OPTIC AND LIGHT — Xenon • Bixenon • Lamps • LED • Stroboscopes • Optic and Headlights • Washers • Light, rain sensors • Accessories | PARKTRONICS AND MIRRORS — Rear parktronic • Front parktronic • Combined parktronic • Rear-view mirrors • Accessories | HEATING AND COOLING — Seat heaters • Mirrors heaters • Screen-wipers heaters • Engine heaters • Auto-refrigerators • Air conditioning units • Accessories | TUNING — Vibro-isolation • Noise-isolation • Tint films • Accessories | ACCESSORIES — Radar-detectors • Handsfree, Bluetooth • Windowlifters • Compressors • Beeps, loudspeakers • Measuring instruments • Cleaners • Car seats • Miscellaneous | MOUNTING — Installation kits • Upholstery • Grilles • Tubes • Cable and wire • Tools • Miscellaneous | POWER — Batteries • Converters • Start-charging equipment • Capacitors • Accessories | MARINE AUDIO AND ELECTRONICS — Marine receivers • Marine audio speakers • Marine subwoofers • Marine amplifiers • Accessories | CAR CARE PRODUCTS — Additives • Washer fluid • Care accessories • Car polish • Flavors • Adhesives and sealants | LIQUID AND OIL — Motor oil • Transmission oil • Brake fluid • Antifreeze • Technical lubricant




In store "130" you can find and buy almost all necessary goods for your auto in Kyiv and other cities, delivery by ground and postal services. Our experienced consultants will provide you with exhaustive information and help you to choose the very particular thing. We are waiting for you at the address


<http://130.com.ua>

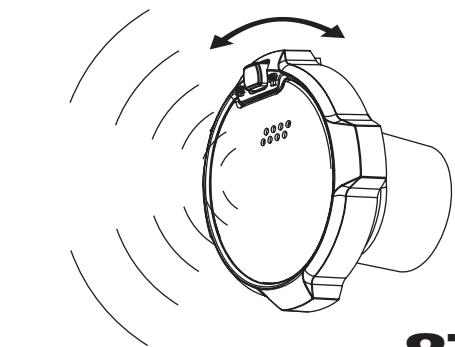


**GT0528, GT0628,
GT06528, GT08628,
GT0928**

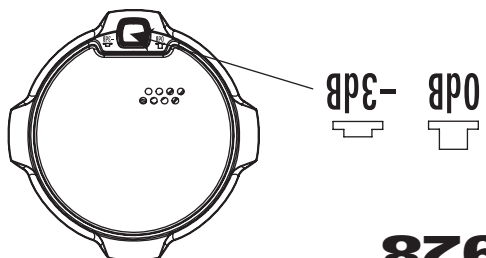




**GT0528, GT0628,
GT06528, GT08628,
GT0928**

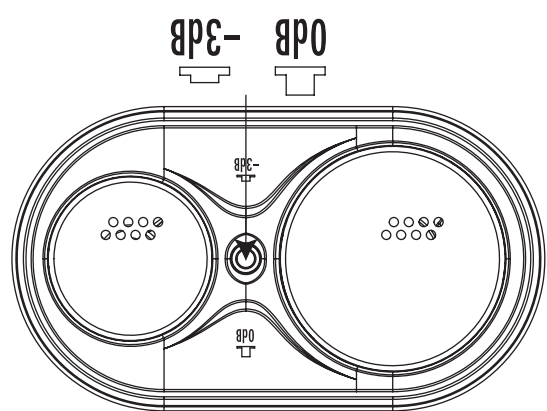



**GT0638, GT06538,
GT0938, GT0838**

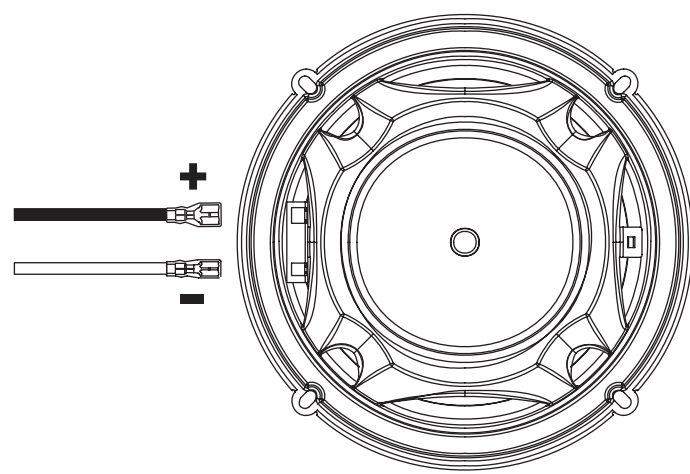






**GT0428, GT0528, GT0628, GT0638,
GT06528, GT06528S, GT06538, GT0838,
GT0928, GT0938, GT0328, GT08628**

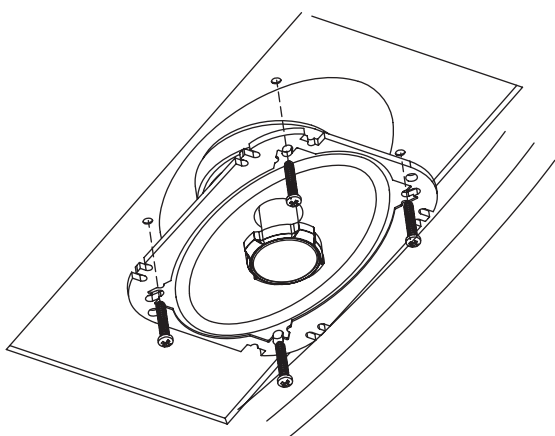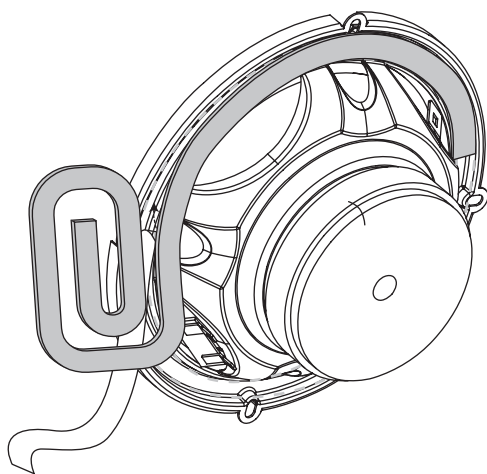



GT06428

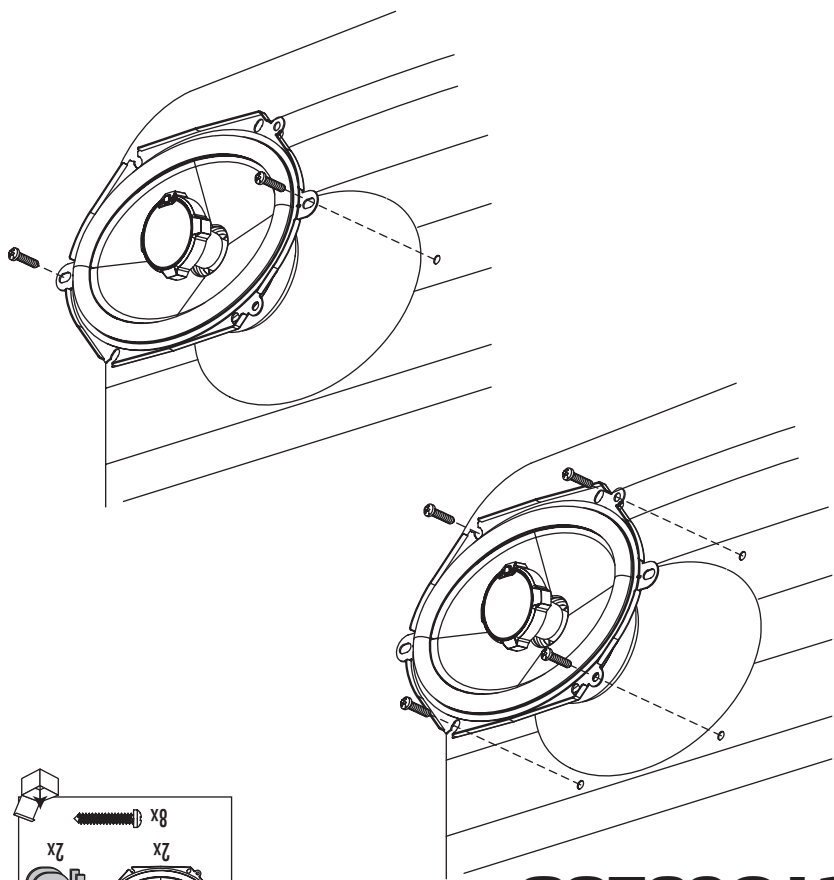




**GT08628,
GT06528S**

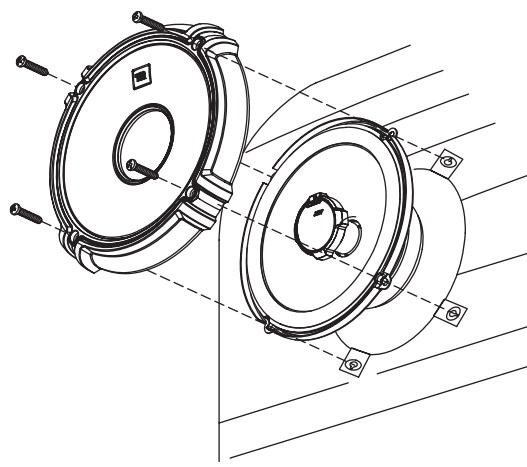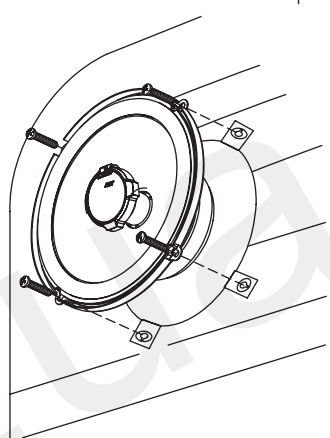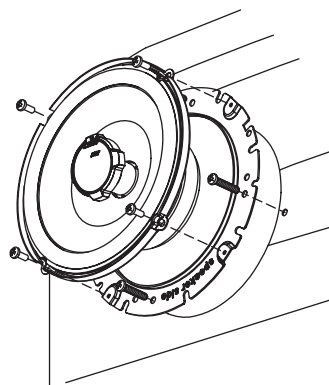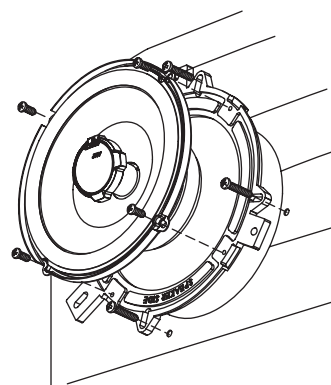




GT0628, GT0638

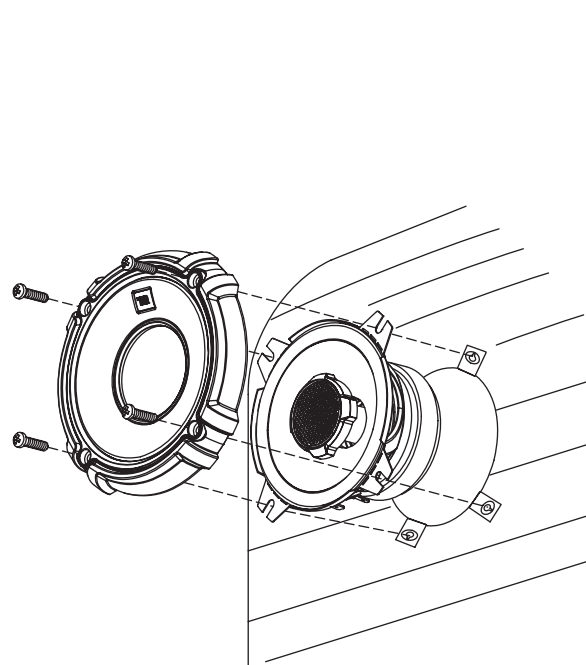

GT0428

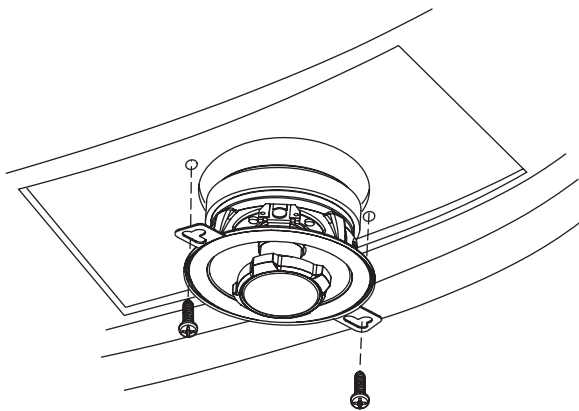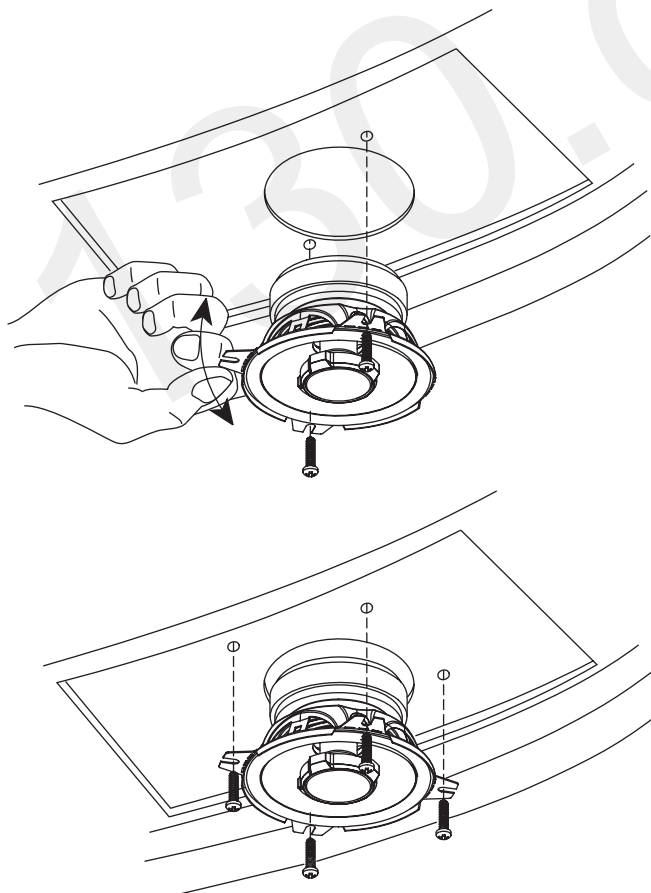


GT0328

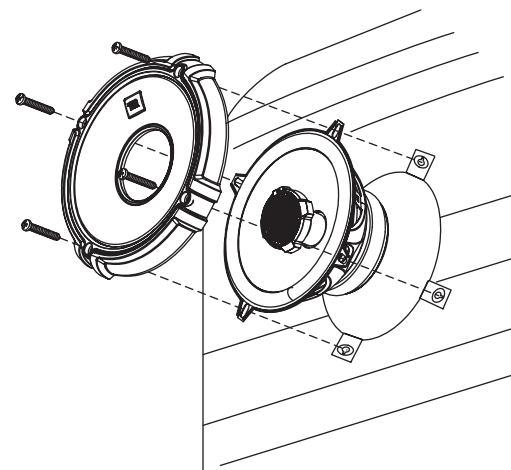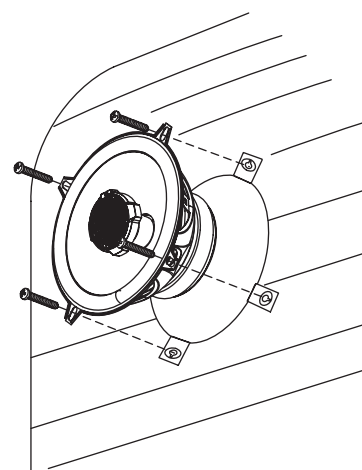

**GT0528, GT0928,
GT06528, GT06538,
GT0938, GT0838**

Designed and engineered in the USA.
A valid serial number is required for warranty coverage.
Features, specifications and appearance are subject to change without notice.
These products are designed for mobile applications and are not intended for connection to the mains.
Harman Consumer Group, Inc., 250 Crossways Park Drive, Woodbury, NY 11797 USA • www.jbl.com
© 2008 Harman International Industries, Incorporated. All rights reserved. Part No. GT0ME0M4/08
JBL and Grand Touring are trademarks of Harman International Industries, Incorporated, registered
in the United States and/or other countries.
H A Harman International Company

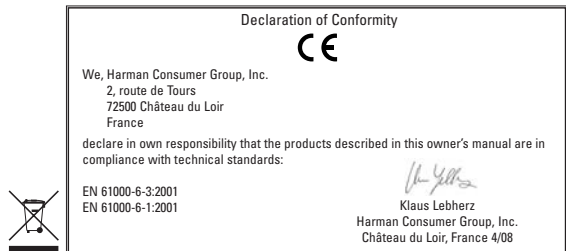

www.jbl.com


Autogood products internet store <http://130.com.ua>

**GRAND
TOURING®
SERIES**

**GT0428
GT0528
GT0628
GT0638
GT06528
GT06528S
GT06538
GT0838
GT0928
GT0938
GT0328
GT06428
GT08628**



JBL

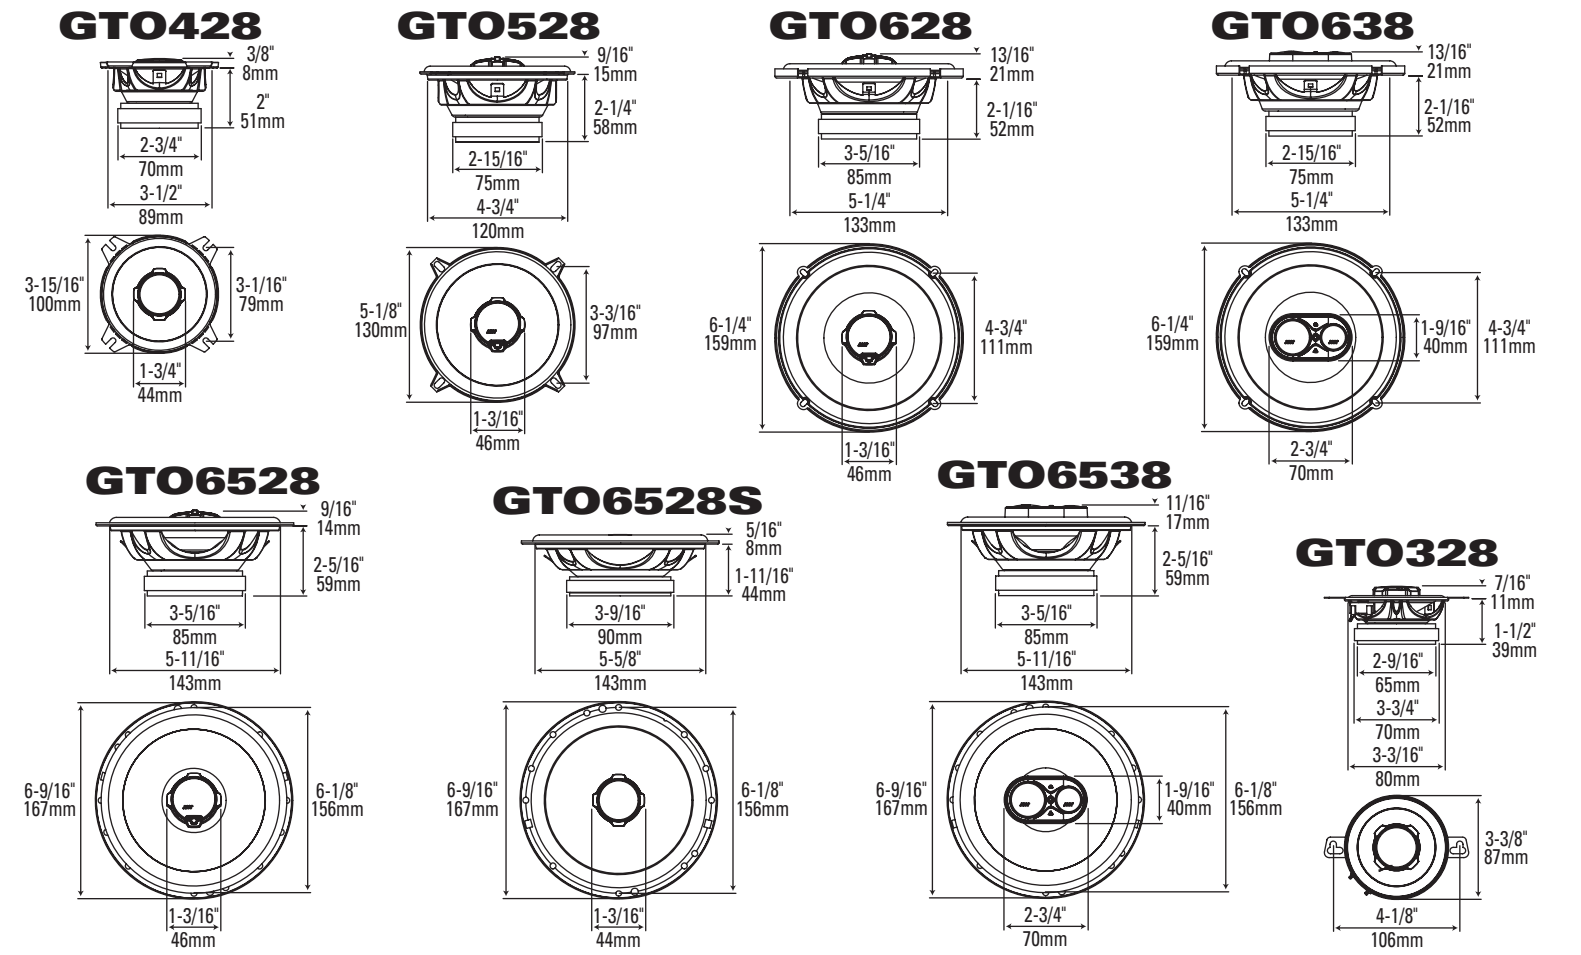

	GTO428	GTO528	GTO628	GTO638	GTO6528	GTO6528S	GTO6538	GTO838	GTO928	GTO938	GTO328	GTO6428	GTO8628
BL (T·m)	3.00	3.65	4.16	3.75	4.02	3.49	3.42	5.01	4.73	4.64	2.38	3.88	4.02
DCR (ohms)	2.29	2.63	2.28	2.58	2.32	2.29	2.28	2.47	2.31	2.35	2.35	2.15	2.25
Mms (g)	4.94	8.78	13.51	13.44	12.50	11.57	9.60	22.69	24.65	23.00	2.98	8.34	16.04
Sd (sq cm)	50.3	86.6	122.7	122.7	130.6	130.6	130.6	213.8	224.0	224.0	33.2	80.0	163.0
Cms (µm/N)	259	340	306	265	233	233	305	620	321	323	458	132	242
Vas (l)	0.92	3.58	6.47	5.61	5.58	5.68	7.31	39.81	22.62	22.76	0.71	1.19	9.03
Fs (Hz)	140.7	92.1	78.3	84.3	93.3	96.9	93.0	42.4	56.6	58.4	136.2	151.7	80.8
Qes	1.11	1.00	0.88	1.31	1.05	1.32	1.09	0.60	0.90	0.92	1.06	1.14	1.13
Qms	5.07	6.38	7.79	7.84	9.75	7.09	8.90	11.04	9.23	9.24	5.26	8.93	10.08
Qts	0.91	0.87	0.79	1.12	0.95	1.12	0.97	0.56	0.82	0.84	0.88	1.01	1.02

GB	SPECIFICATIONS	GTO428	GTO528	GTO628	GTO638	GTO6528	GTO6528S	GTO6538
Type:		4" 2-Way	5-1/4" 2-Way	6-1/2" · 6-3/4" 2-Way	6-1/2" · 6-3/4" 3-Way	165mm 2-Way	165mm 2-Way Shallow	165mm 3-Way
Nominal Impedance:		2 Ohms	2 Ohms	2 Ohms	2 Ohms	2 Ohms	2 Ohms	2 Ohms
Power Handling, RMS:		35W	45W	60W	60W	60W	55W	60W
Power Handling, Peak:		105W	135W	180W	180W	180W	165W	180W
Frequency Response:		75Hz – 21kHz	65Hz – 21kHz	50Hz – 21kHz	50Hz – 21kHz	50Hz – 21kHz	55Hz – 21kHz	50Hz – 21kHz
Sensitivity (2.83V, 1m):		90dB	91dB	92dB	92dB	92dB	92dB	92dB
Type:		GTO838	GTO928	GTO938	GTO328	GTO6428	GTO8628	
Nominal Impedance:		8" 3-Way	6" x 9" 2-Way	6" x 9" 3-Way	3-1/2" 2-Way	4" x 6" 2-Way	5" x 7"/6" x 8" 2-Way	
Power Handling, RMS:		2 Ohms	2 Ohms	2 Ohms	2 Ohms	2 Ohms	2 Ohms	
Power Handling, Peak:		100W	100W	100W	25W	40W	60W	
Frequency Response:		40Hz – 21kHz	45Hz – 21kHz	45Hz – 21kHz	90Hz – 20kHz	75Hz – 21kHz	50Hz – 21kHz	
Sensitivity (2.83V, 1m):		94dB	94dB	94dB	89dB	91dB	92dB	

GENERAL CARE: The loudspeaker grilles may be cleaned with a damp cloth. Do not use any cleaners or solvents on the grilles or the speaker cones.

WARRANTY: Grand Touring® Series speakers are warranted against defects. The duration of the speaker's warranty depends on the laws in the country in which it was purchased. Your local JBL® car audio retailer can help you determine the length of your warranty. To register your product, please visit www.jbl.com.

GE	TECHNISCHE DATEN	GTO428	GTO528	GTO628	GTO638	GTO6528	GTO6528S	GTO6538
Type:		4" 2-Wege	5-1/4" 2-Wege	6-1/2" · 6-3/4" 2-Wege	6-1/2" · 6-3/4" 3-Wege	165mm 2-Wege	165mm 2-Wege auf Schallwand vormontiert	165mm 3-Wege
Nennimpedanz:		2 Ohm	2 Ohm	2 Ohm	2 Ohm	2 Ohm	2 Ohm	2 Ohm
Belastbarkeit, RMS:		35 Watt	45 Watt	60 Watt	60 Watt	60 Watt	55 Watt	60 Watt
Belastbarkeit, Spitze:		105 Watt	135 Watt	180 Watt	180 Watt	180 Watt	165 Watt	180 Watt
Frequenzbereich:		75Hz – 21kHz	65Hz – 21kHz	50Hz – 21kHz	50Hz – 21kHz	50Hz – 21kHz	55Hz – 21kHz	50Hz – 21kHz
Wirkungsgrad @ 2,83V/1 meter:		90 dB	91 dB	92 dB	92 dB	92 dB	92 dB	92 dB
Type:		GTO838	GTO928	GTO938	GTO328	GTO6428	GTO8628	
Nennimpedanz:		8" 3-Wege	6" x 9" 2-Wege	6" x 9" 3-Wege	3-1/2" 2-Wege	4" x 6" 2-Wege	5" x 7"/6" x 8" 2-Wege	
Belastbarkeit, RMS:		2 Ohm	2 Ohm	2 Ohm	2 Ohm	2 Ohms	2 Ohms	
Belastbarkeit, Spitze:		100 Watt	100 Watt	100 Watt	25 Watt	40 Watt	60 Watt	
Frequenzbereich:		40Hz – 21kHz	45Hz – 21kHz	45Hz – 21kHz	90Hz – 20kHz	75Hz – 21kHz	50Hz – 21kHz	
Wirkungsgrad @ 2,83V/1 meter:		94 dB	94 dB	94 dB	89 dB	91 dB	92 dB	

ALLGEMEINE PFLEGE: die können Sie Frontabdeckungen mit einem feuchten Tuch abwischen. Verwenden Sie bitte keine Reinigungsmittel oder Polituren beim Reinigen der Frontabdeckungen und Membranen.

GARANTIE: Sollte ein Defekt auftreten, können Sie die Herstellergarantie in Anspruch nehmen. Die Laufzeit dieser Garantie hängt von den Bestimmungen jenes Landes ab, in dem das Produkt gekauft wurde. Ihr lokaler JBL Fachhändler wird die Garantiedauer für Sie ermitteln. Sie können Ihr Produkt unter www.jbl.com registrieren.

F	CARACTÉRISTIQUES	GTO428	GTO528	GTO628	GTO638	GTO6528	GTO6528S	GTO6538
Type:		4" 2-voies	5-1/4" 2-voies	6-1/2" · 6-3/4" 2-voies	6-1/2" · 6-3/4" 3-voies	165 mm 2-voies	165 mm à 2 voies Faible profondeur	165 mm 3-voies
Impédance nominale :		2 Ohms	2 Ohms	2 Ohms	2 Ohms	2 Ohms	2 Ohms	2 Ohms
Tenue en puissance, RMS :		35W	45W	60W	60W	60W	55W	60W
Tenue en puissance, max. :		105W	135W	180W	180W	180W	165W	180W
Réponse en fréquence :		75Hz – 21kHz	65Hz – 21kHz	50Hz – 21kHz	50Hz – 21kHz	50Hz – 21kHz	55Hz – 21kHz	50Hz – 21kHz
Sensibilité @ 2,83V/1m :		90dB	91dB	92dB	92dB	92dB	92dB	92dB
Type:		GTO838	GTO928	GTO938	GTO328	GTO6428	GTO8628	
Impédance nominale :		8" 3-voies	6" x 9" 2-voies	6" x 9" 3-voies	3-1/2" 2-voies	4" x 6" 2-voies	5" x 7"/6" x 8" 2-voies	
Tenue en puissance, RMS :		2 Ohms	2 Ohms	2 Ohms	2 Ohms	2 Ohms	2 Ohms	
Tenue en puissance, max. :		100W	100W	100W	25W	40W	60W	
Réponse en fréquence :		40Hz – 21kHz	45Hz – 21kHz	45Hz – 21kHz	90Hz – 20kHz	75Hz – 21kHz	50Hz – 21kHz	
Sensibilité @ 2,83V/1m :		94dB	94dB	94dB	89dB	91dB	92dB	

ENTRETIEN GÉNÉRAL : Les grilles d'enceinte peuvent être nettoyées avec un chiffon humide. N'utilisez aucun nettoyeur ou solvant sur les grilles ou les cônes d'enceinte.

GARANTIE : Les Grand Touring® sont garantis contre tout défaut. La durée de garantie du saison dépend des lois du pays dans lequel il a été acheté. Votre détaillant local JBL d'audio d'automobile peut vous aider à déterminer la durée de la garantie. Pour enregistrer votre produit, veuillez nous rendre visite sur www.jbl.com.

ESP	ESPECIFICACIONES	GTO428	GTO528	GTO628	GTO638	GTO6528	GTO6528S	GTO6538
Type:		4" 2-voies	5-1/4" 2-voies	6-1/2" · 6-3/4" 2-vías	6-1/2" · 6-3/4" 3-vías	165 mm 2-vías	165 mm, 2 vías, De poca profundidad	165 mm 3-vías
Impedancia nominal:		2 ohmios	2 ohmios	2 ohmios	2 ohmios	2 ohmios	2 ohmios	2 ohmios
Manejo de potencia, RMS:		35W	45W	60W	60W	60W	55W	60W
Manejo de potencia, pico:		105W	135W	180W	180W	180W	165W	180W
Respuesta en frecuencia:		75Hz – 21kHz	65Hz – 21kHz	50Hz – 21kHz	50Hz – 21kHz	50Hz – 21kHz	55Hz – 21kHz	50Hz – 21kHz
Sensibilidad 2.83V @ 1 metro:		90dB	91dB	92dB	92dB	92dB	92dB	92dB
Type:		GTO838	GTO928	GTO938	GTO328	GTO6428	GTO8628	
Impedancia nominal:		8" 3-vías	6" x 9" 2-vías	6" x 9" 3-vías	3-1/2" 2-vías	4" x 6" 2-vías	5" x 7"/6" x 8" 2-vías	
Manejo de potencia, RMS:		2 ohmios	2 ohmios	2 ohmios	2 ohmios	2 ohmios	2 ohmios	
Manejo de potencia, pico:		100W	100W	100W	25W	40W	60W	
Respuesta en frecuencia:		40Hz – 21kHz	45Hz – 21kHz	45Hz – 21kHz	90Hz – 20kHz	75Hz – 21kHz	50Hz – 21kHz	
Sensibilidad 2.83V @ 1 metro:		94dB	94dB	94dB	89dB	91dB	92dB	

CUIDADOS GENERALES: Las rejillas del altavoz pueden limpiarse con un paño húmedo. No utilice líquidos limpiadores ni disolventes en las rejillas ni en los conos del altavoz.

GARANTÍA: Las Grand Touring® están garantizadas contra cualquier defecto. La duración de la garantía de la caja varía en función de las leyes del país en el que se adquirió. Su distribuidor local de JBL car audio le ayudará a determinar la duración de su garantía. Para registrar el producto, visitenos en www.jbl.com.

NED	SPECIFICATIES	GTO428	GTO528	GTO628	GTO638	GTO6528	GTO6528S	GTO6538
Type:		4" 2-vege	5-1/4" 2-vege	6-1/2" · 6-3/4" 2-vege	6-1/2" · 6-3/4" 3-vege	165mm 2-vege	165mm 2-vege ondiep	165mm 3-vege
Nominale impedantie:		2 Ohm	2 Ohm	2 Ohm	2 Ohm	2 Ohm	2 Ohm	2 Ohm
Belastbaarheid RMS:		35W	45W	60W	60W	60W	55W	60W
Belastbaarheid Piek:		105W	135W	180W	180W	180W	165W	180W
Frequentiebereik:		75Hz – 21kHz	65Hz – 21kHz	50Hz – 21kHz	50Hz – 21kHz	50Hz – 21kHz	55Hz – 21kHz	50Hz – 21kHz
Gevoeligheid 2,83V @ 1 meter:		90dB	91dB	92dB	92dB	92dB	92dB	92dB
Type:		GTO838	GTO928	GTO938	GTO328	GTO6428	GTO8628	
Nominale impedantie:		8" 3-vege	6" x 9" 2-vege	6" x 9" 3-vege	3-1/2" 2-vege	4" x 6" 2-vege	5" x 7"/6" x 8" 2-vege	
Belastbaarheid RMS:		2 Ohm	2 Ohm	2 Ohm	2 Ohm	2 Ohm	2 Ohm	
Belastbaarheid Piek:		100W	100W	100W	25W	40W	60W	
Frequentiebereik:		40Hz – 21kHz	45Hz – 21kHz	45Hz – 21kHz	90Hz – 20kHz	75Hz – 21kHz	50Hz – 21kHz	
Gevoeligheid 2,83V @ 1 meter:		94dB	94dB	94dB	89dB	91dB	92dB	


ALGEMEEN: De luidsprekergrills kunnen met een vochtige doek worden schoongemaakt. Gebruik nooit schoonmaakmiddelen of oplosnende middelen om de grill of de conus schoon te maken.

GARANTIE: Grand Touring® behuizingen worden gegarandeerd op fabrieksfouten. De duur van de garantie wordt bepaald door wettelijke regelingen in het land van aankoop. Uw lokale JBL car audio dealer kan u helpen aan nadere gegevens. Om uw product te registreren bezoekte u ons op www.jbl.com.

ITA	SPECIFICHE	GTO428	GTO528	GTO628	GTO638	GTO6528	GTO6528S	GTO6538
Type:		4" 2-vie	5-1/4" 2-vie	6-1/2" · 6-3/4" 2-vie	6-1/2" · 6-3/4" 3-vie	165mm 2-vie	165mm 2-vie Superficie	165mm 3-vie
Impedenza nominale:		2 Ohm	2 Ohm	2 Ohm	2 Ohm	2 Ohm	2 Ohm	2 Ohm
Tenuta in potenza, RMS:		35W	45W	60W	60W	60W	55W	60W
Tenuta in potenza, Pico:		105W	135W	180W	180W	180W	165W	180W
Risposta in frequenza:		75Hz – 21kHz	65Hz – 21kHz	50Hz – 21kHz	50Hz – 21kHz	50Hz – 21kHz	55Hz – 21kHz	50Hz – 21kHz
Sensibilità 2.83V @ 1 metro:		90dB	91dB	92dB	92dB	92dB	92dB	92dB
Type:		GTO838	GTO928	GTO938	GTO328	GTO6428	GTO8628	
Impedenza nominale:		8" 3-vie	6" x 9" 2-vie	6" x 9" 3-vie	3-1/2" 2-vie	4" x 6" 2-vie	5" x 7"/6" x 8" 2-vie	
Power Handling, RMS:		2 Ohm	2 Ohm	2 Ohm	2 Ohm	2 Ohm	2 Ohm	
Tenuta in potenza, Pico:		100W	100W	100W	25W	40W	60W	
Risposta in frequenza:		40Hz – 21kHz	45Hz – 21kHz	45Hz – 21kHz	90Hz – 20kHz	75Hz – 21kHz	50Hz – 21kHz	
Gevoeligheid 2,83V @ 1 metro:		94dB	94dB	94dB	89dB	91dB	92dB	

MANUTENZIONE GENERALE: Le griglie degli altoparlanti possono essere pulite con un panno umido. Non utilizzare detergenti o solventi sulle griglie o sui coni degli altoparlanti.

GARANZIA: Viene garantita la mancanza di difetti nelle strutture Grand Touring® Series. La durata della garanzia delle strutture varia in base alle leggi vigenti nel Paese in cui vengono acquistate. Per informazioni sulla durata della garanzia, rivolgersi al rivenditore di sistemi audio per auto JBL più vicino. Per registrare un prodotto, è possibile visitare il sito www.jbl.com.

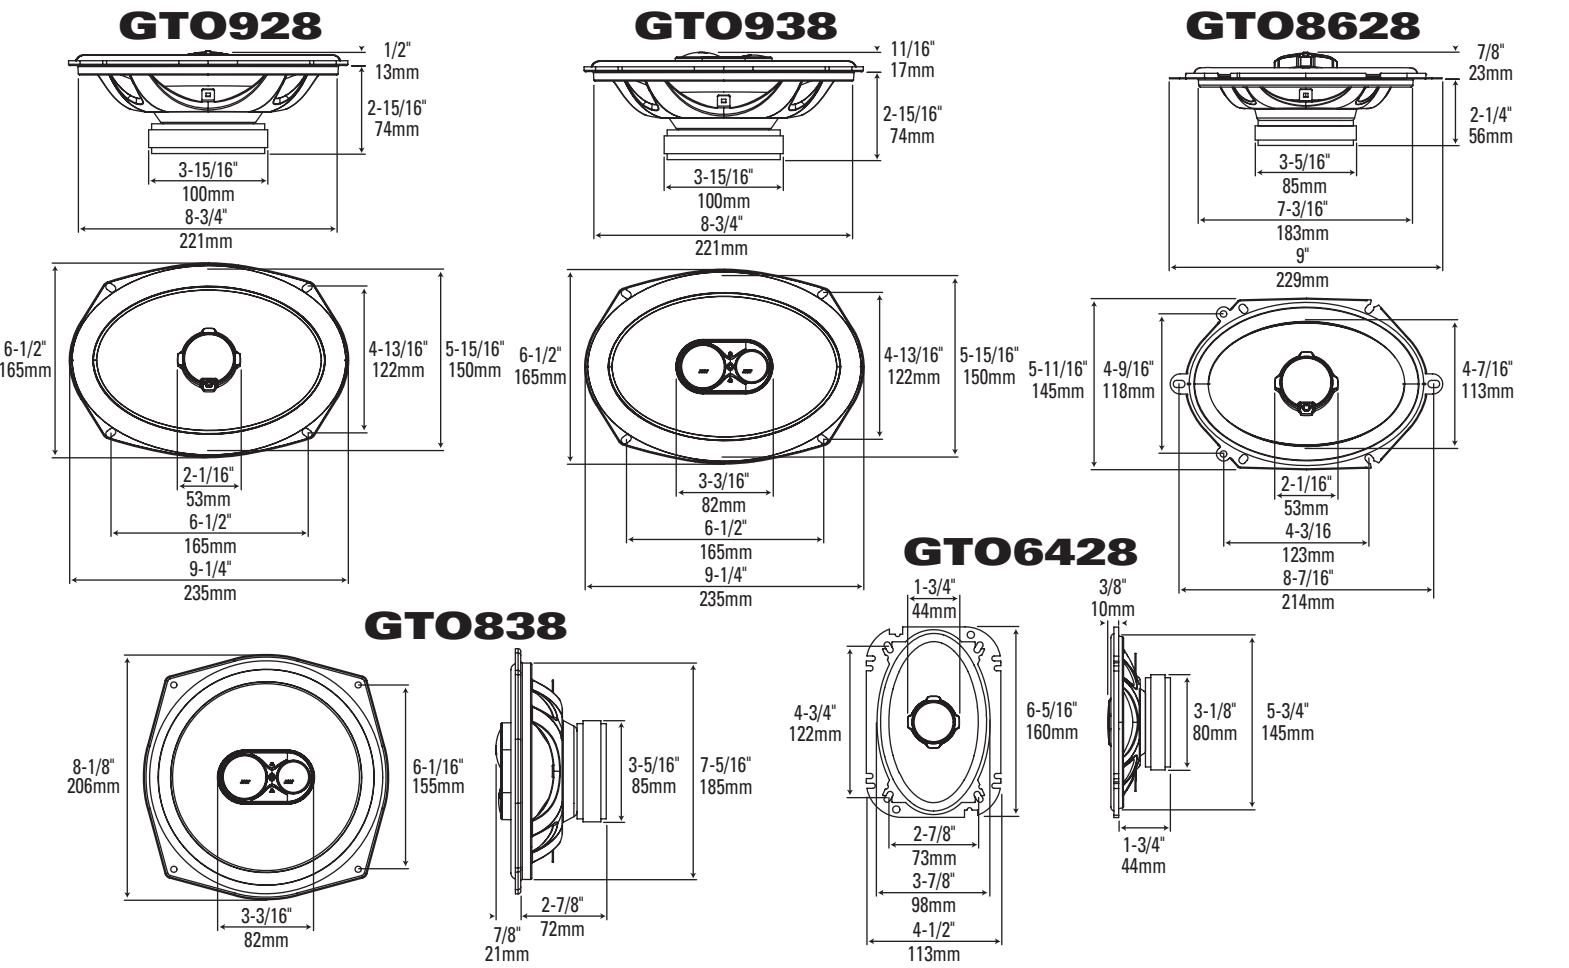

	GTO428	GTO528	GTO628	GTO638	GTO6528	GTO6528S	GTO6538
Type:	4" 2-Way	5-1/4" 2-Way	6-1/2" · 6-3/4" 2-Way	6-1/2" · 6-3/4" 3-Way	165mm 2-Way	165mm 2-Way Grund	165mm 3-Way
Nominal Impedance:	2 ohm	2 ohm	2 ohm	2 ohm	2 ohm	2 ohm	2 ohm
Power Handling, RMS:	35 W	45 W	60 W	60 W	60 W	55 W	60 W
Power Handling, Peak:	105 W	135 W	180 W	180 W	180 W	165 W	180 W
Frequency Response:	75 Hz – 21 kHz	65 Hz – 21 kHz	50 Hz – 21 kHz	50 Hz – 21 kHz	50 Hz – 21 kHz	55 Hz – 21 kHz	50 Hz – 21 kHz
Sensitivity (2.83V, 1m):	90 dB	91 dB	92 dB	92 dB	92dB	92dB	92 dB
Type:	GTO838	GTO928	GTO938	GTO328	GTO6428	GTO8628	
Nominal Impedance:	8" 3-Way	6" x 9" 2-Way	6" x 9" 3-Way	3-1/2" 2-Way	4" x 9" 2-Way	5" x 7"/6" x 8" 2-Way	
Power Handling, RMS:	2 ohm	2 ohm	2 ohm	2 ohm	2 ohm	2 ohm	
Power Handling, Peak:	100 W	100 W	100 W	25 W	40 W	60 W	
Frequency Response:	40 Hz – 21 kHz	45 Hz – 21 kHz	45 Hz – 21 kHz	90 Hz – 20 kHz	75 Hz – 21 kHz	50 Hz – 21 kHz	
Sensitivity (2.83V, 1m):	94 dB	94 dB	94 dB	89 dB	91 dB	92 dB	

ALLMÄN SKÖTSEL: Högtalarens frontgaller kan rengöras med en fuktad duk. Använd inget rengöringsmedel på frontgaller eller på högtalarkonen.

GARANTI: Tala med din JBL handlare om den garanti som gäller för denna produkt. www.jbl.com.

SV	SPECIFIKATIONER	GTO428	GTO528	GTO628	GTO638	GTO6528	GTO6528S	GTO6538
Type:		4" 2-Way	5-1/4" 2-Way	6-1/2" · 6-3/4" 2-Way	6-1/2" · 6-3/4" 3-Way	165mm 2-Way	165mm 2-Way Grund	165mm 3-Way
Nominal Impedance:		2 ohm	2 ohm	2 ohm	2 ohm	2 ohm	2 ohm	2 ohm
Power Handling, RMS:		35 W	45 W	60 W	60 W	60 W	55 W	60 W
Power Handling, Peak:		105 W	135 W	180 W	180 W	180 W	165 W	180 W
Frequency Response:		75 Hz – 21 kHz	65 Hz – 21 kHz	50 Hz – 21 kHz	50 Hz – 21 kHz	50 Hz – 21 kHz	55 Hz – 21 kHz	50 Hz – 21 kHz
Sensitivity (2.83V, 1m):		90 dB	91 dB	92 dB	92 dB	92dB	92dB	92 dB
Type:		GTO838	GTO928	GTO938	GTO328	GTO6428	GTO8628	
Nominal Impedance:		8" 3-Way	6" x 9" 2-Way	6" x 9" 3-Way	3-1/2" 2-Way	4" x 9" 2-Way	5" x 7"/6" x 8" 2-Way	
Power Handling, RMS:		2 ohm	2 ohm	2 ohm	2 ohm	2 ohm	2 ohm	
Power Handling, Peak:		100 W	100 W	100 W	25 W	40 W	60 W	
Frequency Response:		40 Hz – 21 kHz	45 Hz – 21 kHz	45 Hz – 21 kHz	90 Hz – 20 kHz	75 Hz – 21 kHz	50 Hz – 21 kHz	
Sensitivity (2.83V, 1m):		94 dB	94 dB	94 dB	89 dB	91 dB	92 dB	

VEDLIGHETSKVÄL: Högtalarens frontgaller kan rengöras med en fuktig klud. Bruk aldrig rengöringsprodukter eller opölningsmedier på fronter eller högtalermembraner.

GARANTI: Grand Touring® Series systemerne er omfattet af garanti mod fejl og mangler. Garantiens varighed er i henhold til gældende lov. Kontakt din lokale JBL forhandler for nærmere oplysning. Du kan registrere dit køb på www.jbl.com.