



PHONES

0 (800) 800 130  
(050) 462 0 130  
(063) 462 0 130  
(067) 462 0 130

**130**  
COM.UA

Internet store of  
autogoods



SKYPE

km-130

CAR RECEIVERS — Receivers • Media receivers and stations • Native receivers • CD/DVD changers • FM-modulators/USB adapters • Flash memory • Facia plates and adapters • Antennas • Accessories |  
CAR AUDIO — Car audio speakers • Amplifiers • Subwoofers • Processors • Crossovers • Headphones • Accessories | TRIP COMPUTERS — Universal computers • Model computers • Accessories |  
GPS NAVIGATORS — Portable GPS • Built-in GPS • GPS modules • GPS trackers • Antennas for GPS navigators • Accessories | VIDEO — DVR • TV sets and monitors • Car TV tuners • Cameras • Videomodules • Transcoders • Car TV antennas • Accessories | SECURITY SYSTEMS — Car alarms • Bike alarms • Mechanical blockers • Immobilizers • Sensors • Accessories | OPTIC AND LIGHT — Xenon • Bixenon • Lamps • LED • Stroboscopes • Optic and Headlights • Washers • Light, rain sensors • Accessories | PARKTRONICS AND MIRRORS — Rear parktronic • Front parktronic • Combined parktronic • Rear-view mirrors • Accessories | HEATING AND COOLING — Seat heaters • Mirrors heaters • Screen-wipers heaters • Engine heaters • Auto-refrigerators • Air conditioning units • Accessories | TUNING — Vibro-isolation • Noise-isolation • Tint films • Accessories | ACCESSORIES — Radar-detectors • Handsfree, Bluetooth • Windowlifters • Compressors • Beeps, loudspeakers • Measuring instruments • Cleaners • Carsits • Miscellaneous | MOUNTING — Installation kits • Upholstery • Grilles • Tubes • Cable and wire • Tools • Miscellaneous | POWER — Batteries • Converters • Start-charging equipment • Capacitors • Accessories | MARINE AUDIO AND ELECTRONICS — Marine receivers • Marine audio speakers • Marine subwoofers • Marine amplifiers • Accessories | CAR CARE PRODUCTS — Additives • Washer fluid • Care accessories • Car polish • Flavors • Adhesives and sealants | LIQUID AND OIL — Motor oil • Transmission oil • Brake fluid • Antifreeze • Technical lubricant



In store "130" you can find and buy almost all necessary goods for your auto in Kyiv and other cities, delivery by ground and postal services. Our experienced consultants will provide you with exhaustive information and help you to chose the very particular thing. We are waiting for you at the address

<https://130.com.ua>



Congratulations on your purchase of the [Boss Audio Armor Series Subwoofer](#).

Boss Audio takes great pride in producing products that look great, sound great, and stand up to the daily rigors applied by audio enthusiasts around the world.



**AR10D 10" (25cm) Subwoofer**

- *Dual 4  $\Omega$  Voice Coils*
- *2200 W Peak Power Handling*
- *High Temperature Voice Coils*
- *Butyl Rubber Surround*




## Enclosures

The AR10D will work in a sealed or ported enclosure ranging from 0.65 ft<sup>3</sup>-1.0 ft<sup>3</sup>. Since the woofer has pole-vent, it needs a minimum clearance from the rear wall of the enclosure of 0.75" (19 mm).

Below you will find the dimensions to make the enclosure to suit the subwoofers needs, it has been designed for maximum output while retaining great sound quality.


The dimensions have already accounted for the volume displacement of the subwoofer, and using 3/4" (19mm) MDF. All dimensions are external.

## Enclosure Dimensions

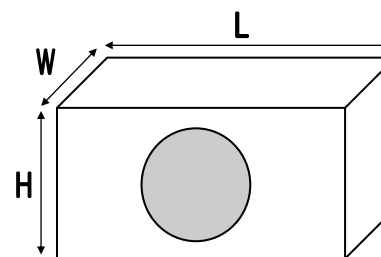

### Sealed Dimensions:

Length (L) : 16" (406 mm)  
Width (W) : 10" (254 mm)  
Height (H) : 12" (305 mm)  
Cutout Diameter: 9-1/8" (232mm)  
Int Volume: 0.75 ft<sup>3</sup>

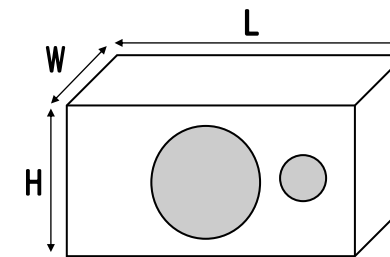


### Ported Dimensions:


Length (L) : 18" (457mm)  
Width (W) : 12" (305 mm)  
Height (H) : 12" (305 mm)  
Cutout Diameter: 9-1/8" (232 mm)  
Port Dimensions: 3" (Dia.) x 8" (76 (Dia.) x 203 mm)  
Tuning Freq: 38 Hz  
Int. Volume: 1.0 ft<sup>3</sup>



## Wiring your Subwoofer

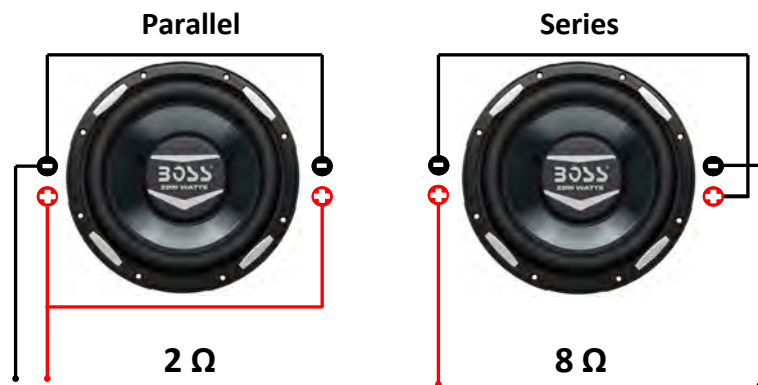

## Multiple Subwoofers

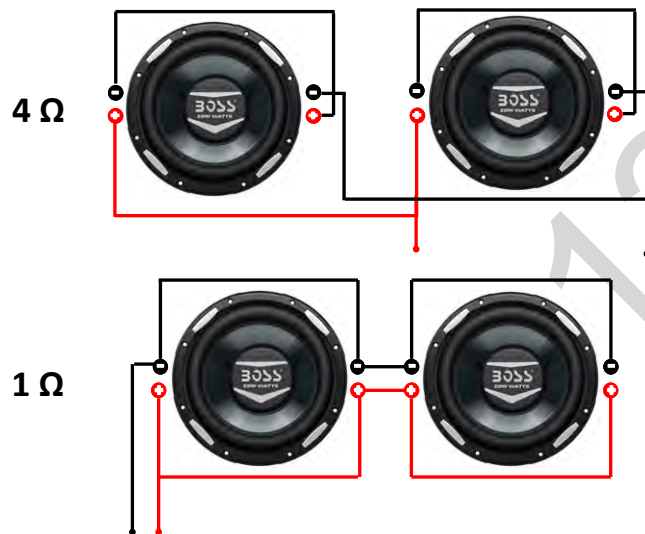

## Product Specifications

Impedance	Dual 4 $\Omega$
Resonant Frequency	36 Hz
Qts	1.044
Qms	5.449
Qes	1.291
Vas	1.049 ft <sup>3</sup> (29.7 liters)
Xmax	8 mm
Sensitivity (1 W/ 1 m)	85 dB
Peak Power Handling	2200 W
Mounting Depth	4-13/16" (122mm)
Cutout Diameter	9-1/8" (232mm)