



#### PHONES

(044) 360-7-130  
 (050) 336-0-130  
 (063) 788-0-130  
 (067) 233-0-130  
 (068) 282-0-130

# 130

COM.UA

## Internet store of autogoods



#### ICQ

294-0-130  
 597-0-130

SKYPE  
 km-130

CAR RECEIVERS — Receivers • Media receivers and stations • Native receivers • CD/DVD changers • FM-modulators/USB adapters • Flash memory • Facia plates and adapters • Antennas • Accessories |  
 CAR AUDIO — Car audio speakers • Amplifiers • Subwoofers • Processors • Crossovers • Headphones • Accessories | TRIP COMPUTERS — Universal computers • Model computers • Accessories |  
 GPS NAVIGATORS — Portable GPS • Built-in GPS • GPS modules • GPS trackers • Antennas for GPS navigators • Accessories | VIDEO — DVR • TV sets and monitors • Car TV tuners • Cameras • Videomodules • Transcoders • Car TV antennas • Accessories | SECURITY SYSTEMS — Car alarms • Bike alarms • Mechanical blockers • Immobilizers • Sensors • Accessories | OPTIC AND LIGHT — Xenon • Bixenon • Lamps • LED • Stroboscopes • Optic and Headlights • Washers • Light, rain sensors • Accessories | PARKTRONICS AND MIRRORS — Rear parktronic • Front parktronic • Combined parktronic • Rear-view mirrors • Accessories | HEATING AND COOLING — Seat heaters • Mirrors heaters • Screen-wipers heaters • Engine heaters • Auto-refrigerators • Air conditioning units • Accessories | TUNING — Vibro-isolation • Noise-isolation • Tint films • Accessories | ACCESSORIES — Radar-detectors • Handsfree, Bluetooth • Windowlifters • Compressors • Beeps, loudspeakers • Measuring instruments • Cleaners • Carsits • Miscellaneous | MOUNTING — Installation kits • Upholstery • Grilles • Tubes • Cable and wire • Tools • Miscellaneous | POWER — Batteries • Converters • Start-charging equipment • Capacitors • Accessories | MARINE AUDIO AND ELECTRONICS — Marine receivers • Marine audio speakers • Marine subwoofers • Marine amplifiers • Accessories | CAR CARE PRODUCTS — Additives • Washer fluid • Care accessories • Car polish • Flavors • Adhesives and sealants | LIQUID AND OIL — Motor oil • Transmission oil • Brake fluid • Antifreeze • Technical lubricant



In store "130" you can find and buy almost all necessary goods for your auto in Kyiv and other cities, delivery by ground and postal services. Our experienced consultants will provide you with exhaustive information and help you to chose the very particular thing. We are waiting for you at the address

<http://130.com.ua>

## LEGEND MLCX 2TW.3

### COMP CROSSOVER

### 300 W




#### TECHNICAL SPECIFICATIONS



Component			2 Way Passive Crossover
Power Handling	W peak		300
	Continuous		150
Crossover	Woofer		Lo-pass 6 dB Oct.
	Tweeter		Hi-pass 12 dB Oct.
	Cut-off		2.5 kHz (Mid/Hi-Cont. = ON) 3.5 kHz (Mid/Hi-Cont. = OFF)
Adjustment	Tweeter		+2 / 0 / -2 dB
	Hi-Boost		ON / OFF
	Hi-Contour		ON / OFF
	Mid-Contour		ON / OFF
	Bi-Amp		ON / OFF
Size	mm		195 x 119 x 41
	(in.)		(7.67 x 4.68 x 1.61)
Weight	kg (lb)		0,57 (1.26)

1. Bi-amplification available, selectable through appropriate hi-current rating switch with hi-current carrying capability.
2. "Mid-Contour" two-position control, for a linear mid-bass frequency response according to the woofers position in the car and the listener's favourite sound.
3. "Hi-Contour" two-position control, to select the tweeter hi-pass crossover point selection according to the tweeter position/angle towards the listener.
4. "Mid-Contour" in conjunction with "Hi-Contour" provides the ability to use MLCX 2 TW.3 to build a two way system based on ML 1650.3 or ML 1800.3 woofer together with ML 280.3 tweeter.
5. Three-position switch for tweeter level adjustments in 2 dB steps, to fine-tune the transducer's emission.
6. "Hi-Boost" control, selectable through appropriate switch, to provide better linearity of the tweeter emission above 10kHz when positioned not on axis to with the listener.
7. Extremely high quality bi-metallized 160V polyester film capacitors with ultra-low DF, for maximum sound transparency and neat mid/hi-frequencies.
8. Air wound inductors built on pure copper-wire with up to 1mm diameter, for high saturation threshold of the magnetic flux and low losses on the woofer section where high transient currents are demanded.
9. High power rating Wirewound resistors, to ensure performance stability even at high operating temperature. The Wirewound build construction grants low parasitic series inductance thus reducing losses at high frequencies, especially for resistors in series to the tweeter

Mid-Contour & Hi-Contour

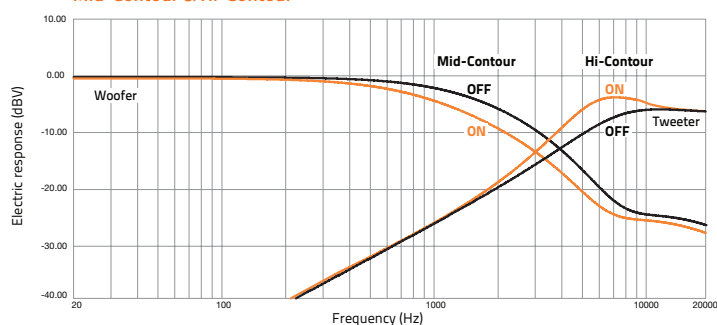

Tweeter Level & Hi-Boost

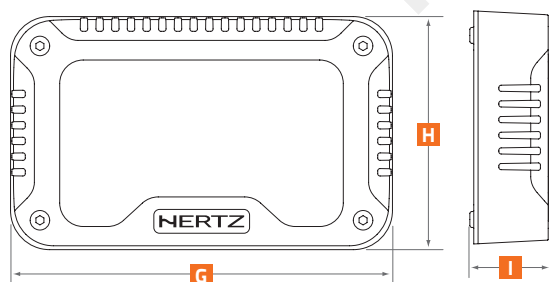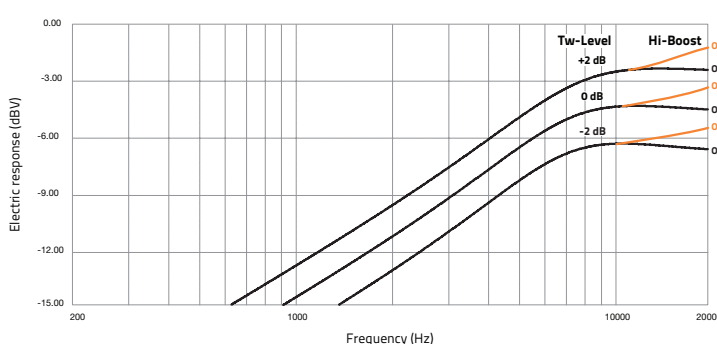

G	195 mm	7.67 in.
H	119 mm	4.68 in.
I	41 mm	1.61 in.