

PHONES 0 (800) 800 130 (050) 462 0 130

(063) 462 0 130 (067) 462 0 130

## 130 Internet store of autogoods



SKYPE

km-130

CAR RECEIVERS — Receivers • Media receivers and stations • Native receivers • CD/DVD changers • FM-modulators/USB adapters • Flash memory • Facia plates and adapters • Antennas • Accessories |

CAR AUDIO — Car audio speakers • Amplifiers • Subwoofers • Processors • Crossovers • Headphones • Accessories | TRIP COMPUTERS — Universal computers • Model computers • Accessories |

CAR AUDIO — Car audio speakers • Amplifiers • Crossovers • Accessories | TRIP COMPUTERS — Universal computers • Accessories |

CAR AUDIO — Car audio speakers • Amplifiers • CRS medules • CRS media • CRS m

- GPS NAVIGATORS Portable GPS Built-in GPS GPS modules GPS trackers Antennas for GPS navigators Accessories | VIDEO DVR TV sets and monitors Car TV tuners Cameras Videomodules Transcoders Car TV antennas Accessories | SECURITY SYSTEMS Car alarms Bike alarms Mechanical blockers Immobilizers Sensors Accessories | OPTIC AND LIGHT Xenon Bixenon Lamps
- LED Stroboscopes Optic and Headlights Washers Light, rain sensors Accessories | PARKTRONICS AND MIRRORS Rear parktronics Front parktronics Combined parktronics Rear-view mirrors
- Accessories | HEATING AND COOLING Seat heaters Mirrors heaters Screen-wipers heaters Engine heaters Auto-refrigerators Air conditioning units Accessories | TUNING Vibro-isolation Noise-isolation Tint films Accessories | ACCESSORIES Radar-detectors Handsfree, Bluetooth Windowlifters Compressors Beeps, loudspeakers Measuring instruments Cleaners Carsits
- Miscellaneous | MOUNTING Installation kits Upholstery Grilles Tubes Cable and wire Tools Miscellaneous | POWER Batteries Converters Start-charging equipment Capacitors
- Accessories | MARINE AUDIO AND ELECTRONICS Marine receivers Marine audio speakers Marine subwoofers Marine amplifiers Accessories | CAR CARE PRODUCTS Additives Washer fluid Care accessories Car polish Flavors Adhesives and sealants | LIQUID AND OIL Motor oil Transmission oil Brake fluid Antifreeze Technical lubricant



In store "130" you can find and buy almost all necessary goods for your auto in Kyiv and other cities, delivery by ground and postal services. Our experienced consultants will provide you with exhaustive information and help you to chose the very particular thing. We are waiting for you at the address

https://130.com.ua

hertzaudiovideo.com



## HMX 6.5 S



## **TECHNICAL SPECIFICATIONS**

| Component                       |                                  | Two way coaxial                        |  |
|---------------------------------|----------------------------------|--|--|
| Size                            |                                  | ,                                      |  |
| Woofer                          | mm (in.)                         | 165 (6.5)                              |  |
| Tweeter diaphragm               | mm (in.)                         | 36 (1.4)                               |  |
| Voice Coil Ø                    |                                  |  |  |
| Woofer                          | mm (in.)                         | 25 (1)                                 |  |
| Tweeter                         | mm (in.)                         | 20 (0.8)                               |  |
| Power Handling                  | W peak                           | 150                                    |  |
|                                 | W continuos                      | 75                                     |  |
| Impedance                       | Ω                                | 4                                      |  |
| Frequency Response              | Hz                               | 50 ÷ 25k                               |  |
| Woofer Magnet size<br>D x d x h | mm<br>(in.)                      | 78,5 x 32 x 17<br>(3.09 x 1.26 x 0.67) |  |
| Tweeter Magnet size<br>D x h    | mm<br>(in.)                      | 19,7 x 3<br>(0.78 x 0.12)              |  |
| Weight of one speaker           | kg (lb.)                         | 1 (2.2)                                |  |
| Woofer Magnet                   | High density flu                 | High density flux ferrite              |  |
| Tweeter Magnet                  | Neodymium                        | Neodymium                              |  |
| Cone                            | Polypropylene with UV inhibitors |  |  |
| Dome                            | PEI                              |  |  |
| Xmech                           | mm (in.)                         | ±6,65 (0.26)                           |  |

## **ELECTRO-ACOUSTIC PARAMETERS**

| D    | mm   | 125  |
|------|------|------|
| Xmax | mm   | 3,65 |
| Re   | Ω    | 3,5  |
| Fs   | Hz   | 65   |
| Le   | mH   | 0,53 |
| Vas  | I    | 8,8  |
| Mms  | g    | 14   |
| Cms  | mm/N | 0,4  |
| BL   | T∎m  | 5,2  |
| Qts  |      | 0,7  |
| Qes  |      | 0,75 |
| Qms  |      | 11,5 |
| Spl  | dB   | 89   |
|      |      |      |













- Hertz Pure Marine Certified Product stamp featuring the IP65 protection grade, ASTM-D4329 standards for UV resistance and ASTM-B117 for salt fog operability.
- 1.4" Neodymium magnet tweeter featuring a PEI material dome combined with faceplate and acoustic lens optimized for best off-axis dispersion and highest SPL.
- Sound-transparent stainless steel tweeter mesh grille providing efficient high-frequency transfer, attractive look and a rock-solid protection.
- Long-throw 25mm (1") voice coil woofer fine-tuned for infinite baffle application featuring polypropylene cone injected with UV inhibitors and comolded Santoprene surround.
- Aramid fiber spider with silicone-insulated lead wires ensuring durability and constant performance over time.
- FEM optimized high-excursion mobile equipment driven by a massive magnetic group encapsulated into a marine-grade polymer injected basket.
- Sealed built-in crossover with resettable solid-state tweeter protection circuit.
- Gold-plated corrosion resistant terminals.

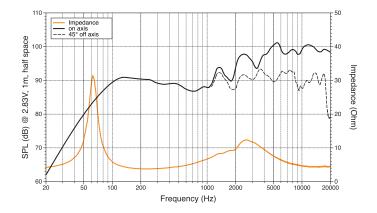



| Α | 172,2 mm | 6.78 in. |
|---|----------|----------|
| В | 128 mm   | 5.04 in. |
| С | 95,6 mm  | 3.76 in. |
| D | 69 mm    | 2.72 in. |
| F | 26,6 mm  | 1.05 in. |

