



0 (800) 800 130
(050) 462 0 130
(063) 462 0 130
(067) 462 0 130

130
COM.UA

Internet store of autogoods



km-130


CAR RECEIVERS — Receivers • Media receivers and stations • Native receivers • CD/DVD changers • FM-modulators/USB adapters • Flash memory • Facia plates and adapters • Antennas • Accessories | CAR AUDIO — Car audio speakers • Amplifiers • Subwoofers • Processors • Crossovers • Headphones • Accessories | TRIP COMPUTERS — Universal computers • Model computers • Accessories | GPS NAVIGATORS — Portable GPS • Built-in GPS • GPS modules • GPS trackers • Antennas for GPS navigators • Accessories | VIDEO — DVR • TV sets and monitors • Car TV tuners • Cameras • Videomodules • Transcoders • Car TV antennas • Accessories | SECURITY SYSTEMS — Car alarms • Bike alarms • Mechanical blockers • Immobilizers • Sensors • Accessories | OPTIC AND LIGHT — Xenon • Bixenon • Lamps • LED • Stroboscopes • Optic and Headlights • Washers • Light, rain sensors • Accessories | PARKTRONICS AND MIRRORS — Rear parktronic • Front parktronic • Combined parktronic • Rear-view mirrors • Accessories | HEATING AND COOLING — Seat heaters • Mirrors heaters • Screen-wipers heaters • Engine heaters • Auto-refrigerators • Air conditioning units • Accessories | TUNING — Vibro-isolation • Noise-isolation • Tint films • Accessories | ACCESSORIES — Radar-detectors • Handsfree, Bluetooth • Windowlifters • Compressors • Beeps, loudspeakers • Measuring instruments • Cleaners • Carsits • Miscellaneous | MOUNTING — Installation kits • Upholstery • Grilles • Tubes • Cable and wire • Tools • Miscellaneous | POWER — Batteries • Converters • Start-charging equipment • Capacitors • Accessories | MARINE AUDIO AND ELECTRONICS — Marine receivers • Marine audio speakers • Marine subwoofers • Marine amplifiers • Accessories | CAR CARE PRODUCTS — Additives • Washer fluid • Care accessories • Car polish • Flavors • Adhesives and sealants | LIQUID AND OIL — Motor oil • Transmission oil • Brake fluid • Antifreeze • Technical lubricant



In store "130" you can find and buy almost all necessary goods for your auto in Kyiv and other cities, delivery by ground and postal services. Our experienced consultants will provide you with exhaustive information and help you to chose the very particular thing. We are waiting for you at the address


<https://130.com.ua>

INSTALLATION MANUAL
EINBAUANLEITUNG
GUIDE D'INSTALLATION
MANUAL DE INSTALACIÓN
MONTAGEHANDBUCH
INSTALLAZIONE MANUALE
INSTALLATIONSMANUAL
ASENNUSOHJE
取付説明書
安裝手冊
PYKOBODCTBO HO
YCTAHOBKE
PODREČNIK INSTALACI
MANUAL DE INSTALAÇÃO
KURBULUM KILAVUZU
安裝手冊

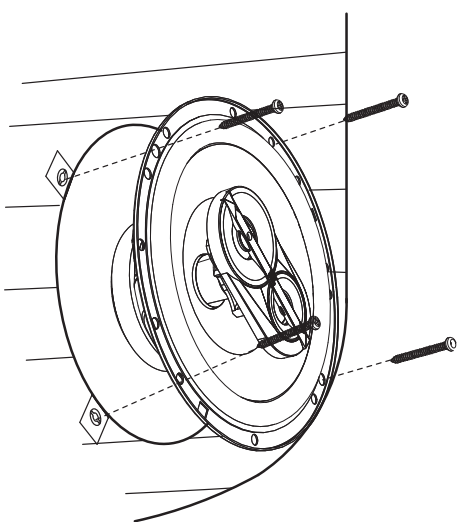

A detailed line drawing of the underside of the device. It features a large circular central area with a small hole in the center. Surrounding this are several curved, ribbed sections. At the bottom center, there is a battery compartment with two terminals. Two wires are connected to these terminals: a thin wire on the left and a thicker wire on the right. The thicker wire is labeled with a minus sign (-) and the thinner wire with a plus sign (+). The entire unit is enclosed in a circular frame with several screws visible around the perimeter.

CS760C

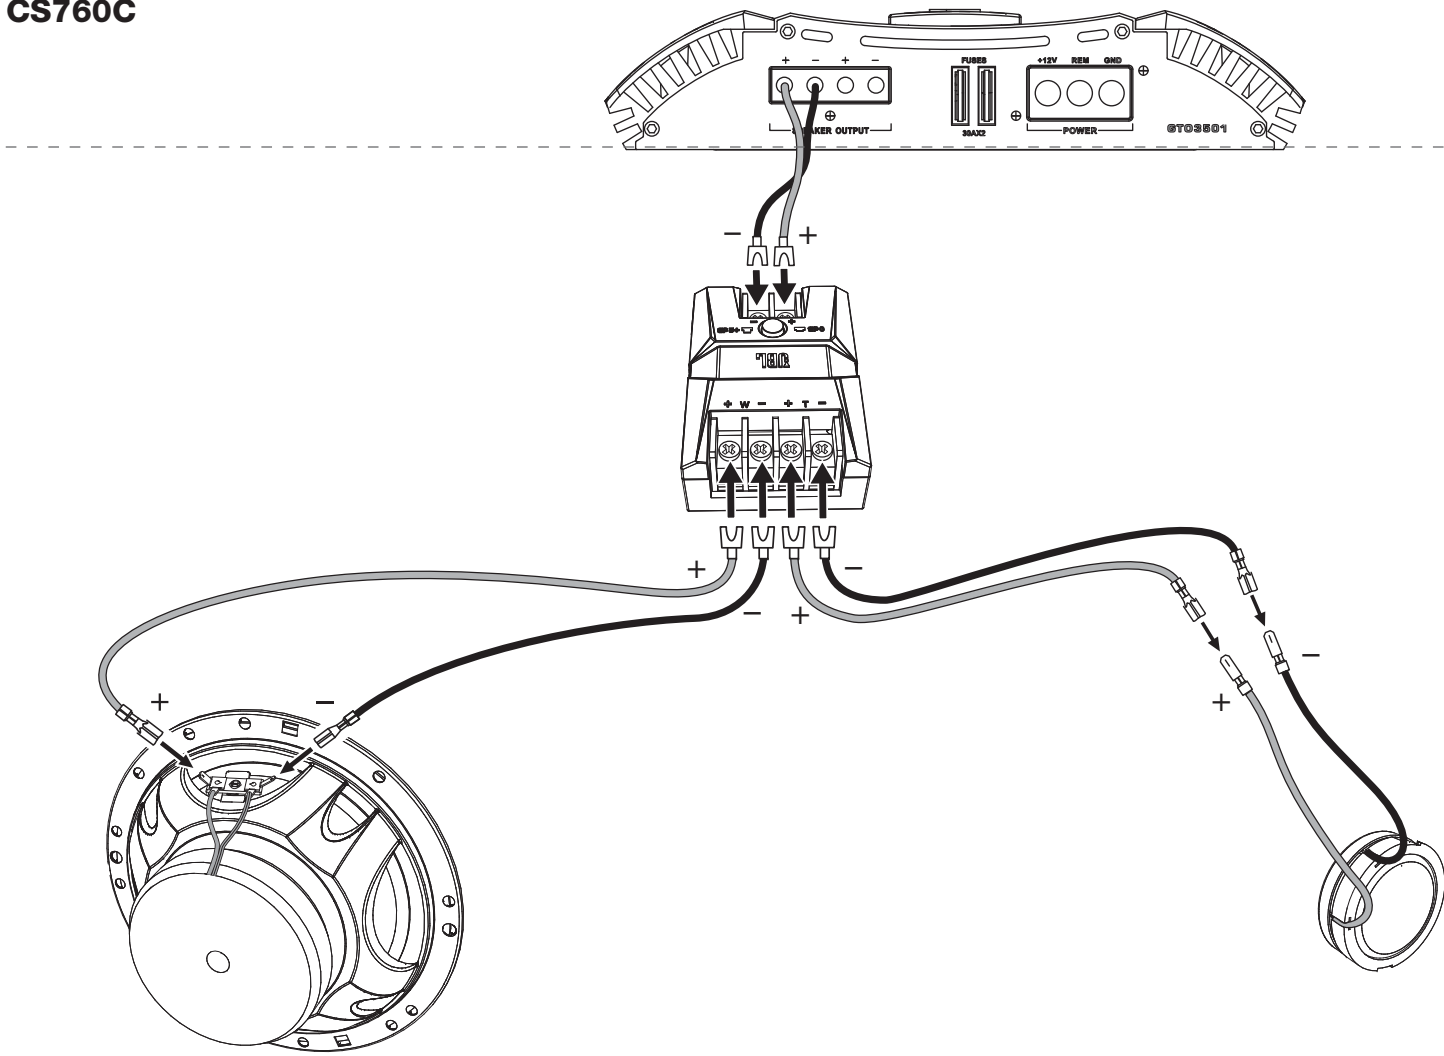

[illegible]

SPECIFICATIONEN		Type		Kontinuerlijk draagvermogen		Toppefficiënt draagvermogen		Normaal draagvermogen		Vrije diameter		Totale clup		Montageclup	
Sereia	CS760C	6" x 9"	6-1/2"	143 lbs	143 lbs	143 lbs	143 lbs	143 lbs	143 lbs	6-1/2" (165 mm)	5-5/8" (145 mm)	2-1/9" (52 mm)	2-5/16" (59 mm)	2-1/9" (52 mm)	2-5/16" (59 mm)
	CS769	6" x 9"	6-1/2"	143 lbs	143 lbs	143 lbs	143 lbs	143 lbs	143 lbs	6-1/2" (165 mm)	5-5/8" (145 mm)	2-1/9" (52 mm)	2-5/16" (59 mm)	2-1/9" (52 mm)	2-5/16" (59 mm)
	CS768	6" x 9"	6-1/2"	143 lbs	143 lbs	143 lbs	143 lbs	143 lbs	143 lbs	6-1/2" (165 mm)	5-5/8" (145 mm)	2-1/9" (52 mm)	2-5/16" (59 mm)	2-1/9" (52 mm)	2-5/16" (59 mm)
	CS762	6" x 9"	6-1/2"	143 lbs	143 lbs	143 lbs	143 lbs	143 lbs	143 lbs	6-1/2" (165 mm)	5-5/8" (145 mm)	2-1/9" (52 mm)	2-5/16" (59 mm)	2-1/9" (52 mm)	2-5/16" (59 mm)
	CS753	6" x 9"	6-1/2"	143 lbs	143 lbs	143 lbs	143 lbs	143 lbs	143 lbs	6-1/2" (165 mm)	5-5/8" (145 mm)	2-1/9" (52 mm)	2-5/16" (59 mm)	2-1/9" (52 mm)	2-5/16" (59 mm)
	CS752	6" x 9"	6-1/2"	143 lbs	143 lbs	143 lbs	143 lbs	143 lbs	143 lbs	6-1/2" (165 mm)	5-5/8" (145 mm)	2-1/9" (52 mm)	2-5/16" (59 mm)	2-1/9" (52 mm)	2-5/16" (59 mm)

[illegible]

Exterior	Tipos	Especificaciones	Manejo de potencia continua	Respuesta en frecuencia	Impedancia nominal	Sensibilidad <3dB @ 1 metro	Diámetro exterior	Montaje de diámetro recorte	Profundidad de montaje
		CS742	alrededor de 50W	75Hz ~ 20kHz	4 Ohmios	90dB	3-29/32" (99mm)	4-3/4" (89mm)	2-5/16" (69mm)
		CS752	alrededor de 100W	70Hz ~ 20kHz	4 Ohmios	90dB	4-1/8" (103mm)	4-3/4" (120mm)	2-9/32" (65mm)
		CS762	alrededor de 135W	65Hz ~ 20kHz	4 Ohmios	90dB	5-1/8" (130mm)	4-3/4" (120mm)	2-9/32" (65mm)
		CS763	alrededor de 150W	65Hz ~ 20kHz	4 Ohmios	90dB	6-1/2" (165mm)	5-5/8" (143mm)	2-5/16" (69mm)
		CS764	alrededor de 150W	65Hz ~ 20kHz	4 Ohmios	90dB	6-1/2" (165mm)	5-5/8" (143mm)	2-5/16" (69mm)
		CS765	alrededor de 150W	65Hz ~ 20kHz	4 Ohmios	90dB	6-1/2" (165mm)	5-5/8" (143mm)	2-5/16" (69mm)
		CS766	alrededor de 150W	65Hz ~ 20kHz	4 Ohmios	90dB	6-1/2" (165mm)	5-5/8" (143mm)	2-5/16" (69mm)

Type		Puissance continue admissible		Puissance crête admissible		Réponse en fréquence		Sensibilité ± 2,50V/1m		Diamètre extérieur		Largeur de découpe		Profondeur totale		Profondeur de montage	
Caractéristiques	CS742	4"	5-1/4"	CS752	30W	70Hz - 20kHz	105W	75Hz - 20kHz	90dB	4 orms	3-29/32" (196mm)	5-5/8" (130mm)	4-3/4" (120mm)	2-5/16" (65mm)	2" (51mm)	2-9/32" (68mm)	2-5/16" (65mm)
	CS753	5-1/4"	35W	CS763	45W	55Hz - 20kHz	135W	55Hz - 20kHz	90dB	4 orms	6-1/2" (162mm)	5-5/8" (143mm)	2-29/32" (74mm)	2-5/16" (65mm)	2-9/32" (68mm)	2-5/16" (65mm)	2-5/16" (65mm)
	CS763	6-1/2"	45W	CS769	70W	40Hz - 21kHz	210W	55Hz - 20kHz	90dB	4 orms	6-1/2" x 6-1/2" (250mm x 159mm)	5-5/8" (143mm)	2-19/32" (66mm)	2-5/16" (65mm)	2-19/32" (66mm)	2-5/16" (65mm)	2-5/16" (65mm)
	CS760C	6-1/2" x 9"	50W	CS769C	hard-pair, two voices	hard-pair, two voices	hard-pair, two voices	hard-pair, two voices	hard-pair, two voices	hard-pair, two voices	hard-pair, two voices	hard-pair, two voices	hard-pair, two voices	hard-pair, two voices	hard-pair, two voices	hard-pair, two voices	hard-pair, two voices
Fusibles																	

TECHNISCHE DATEN											Typ		
Duschen	CS742	4"	2-Wege Lautsprecher	30 W	90 W	70 Hz – 20 kHz	4 Ohm	90 dB	99 mm	88 mm	59 mm	51 mm	Einbauteile
	CS752	5-1/4"	2-Wege Lautsprecher	35 W	105 W	70 Hz – 20 kHz	4 Ohm	93 dB	130 mm	120 mm	65 mm	59 mm	Vollständige Tiefe
	CS754	6-1/2"	3-Wege Lautsprecher	35 W	105 W	70 Hz – 21 kHz	4 Ohm	93 dB	130 mm	120 mm	67 mm	66 mm	Durchmesser des Montageschnittes
	CS762	6-1/2"	2-Wege Lautsprecher	45 W	135 W	55 Hz – 20 kHz	4 Ohm	93 dB	166 mm	143 mm	67 mm	66 mm	Durchmesser des Montageschnittes
	CS768	6-1/2"	3-Wege Lautsprecher	45 W	135 W	55 Hz – 21 kHz	4 Ohm	92 dB	166 mm	143 mm	67 mm	66 mm	Außendurchmesser
	CS769	6" x 9"	3-Wege Lautsprecher	50 W	150 W	65 Hz – 20 kHz	4 Ohm	94 dB	235 mm x 166 mm	166 mm	143 mm	66 mm	Durchmesser des Montageschnittes
	CS760C	6-1/2" 2-Wege Komponenten	50 W	150 W	65 Hz – 20 kHz	4 Ohm	92 dB	166 mm	143 mm	66 mm	66 mm	59 mm	Vollständige Tiefe
	CS760C	6-1/2" 2-Wege Komponenten	50 W	150 W	65 Hz – 20 kHz	4 Ohm	92 dB	166 mm	143 mm	66 mm	66 mm	59 mm	Einbauteile
	CS760C	6-1/2" 2-Wege Komponenten	50 W	150 W	65 Hz – 20 kHz	4 Ohm	92 dB	166 mm	143 mm	66 mm	66 mm	59 mm	Vollständige Tiefe
	CS760C	6-1/2" 2-Wege Komponenten	50 W	150 W	65 Hz – 20 kHz	4 Ohm	92 dB	166 mm	143 mm	66 mm	66 mm	59 mm	Einbauteile

SPECIFICATIONS									
Type	Continuous power handling				Peak power handling		Frequency response		External diameter
English	CS742	CS741 (1.03mm)	CS740 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	3.29oz (99mm)
	CS743	CS742 (1.03mm)	CS741 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	3.50oz (100mm)
	CS744	CS743 (1.03mm)	CS742 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	3.71oz (101mm)
	CS745	CS744 (1.03mm)	CS743 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	3.92oz (102mm)
	CS746	CS745 (1.03mm)	CS744 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	4.13oz (103mm)
English	CS747	CS746 (1.03mm)	CS745 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	4.34oz (104mm)
	CS748	CS747 (1.03mm)	CS746 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	4.55oz (105mm)
	CS749	CS748 (1.03mm)	CS747 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	4.76oz (106mm)
	CS750	CS749 (1.03mm)	CS748 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	4.97oz (107mm)
	CS751	CS750 (1.03mm)	CS749 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	5.18oz (108mm)
English	CS752	CS751 (1.03mm)	CS750 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	5.39oz (109mm)
	CS753	CS752 (1.03mm)	CS751 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	5.60oz (110mm)
	CS754	CS753 (1.03mm)	CS752 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	5.81oz (111mm)
	CS755	CS754 (1.03mm)	CS753 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	6.02oz (112mm)
	CS756	CS755 (1.03mm)	CS754 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	6.23oz (113mm)
English	CS757	CS756 (1.03mm)	CS755 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	6.44oz (114mm)
	CS758	CS757 (1.03mm)	CS756 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	6.65oz (115mm)
	CS759	CS758 (1.03mm)	CS757 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	6.86oz (116mm)
	CS760	CS759 (1.03mm)	CS758 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	7.07oz (117mm)
	CS761	CS760 (1.03mm)	CS759 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	7.28oz (118mm)
English	CS762	CS761 (1.03mm)	CS760 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	7.49oz (119mm)
	CS763	CS762 (1.03mm)	CS761 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	7.70oz (120mm)
	CS764	CS763 (1.03mm)	CS762 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	7.91oz (121mm)
	CS765	CS764 (1.03mm)	CS763 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	8.12oz (122mm)
	CS766	CS765 (1.03mm)	CS764 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	8.33oz (123mm)
English	CS767	CS766 (1.03mm)	CS765 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	8.54oz (124mm)
	CS768	CS767 (1.03mm)	CS766 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	8.75oz (125mm)
	CS769	CS768 (1.03mm)	CS767 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	8.96oz (126mm)
	CS770	CS769 (1.03mm)	CS768 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	9.17oz (127mm)
	CS771	CS770 (1.03mm)	CS769 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	9.38oz (128mm)
English	CS772	CS771 (1.03mm)	CS770 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	9.59oz (129mm)
	CS773	CS772 (1.03mm)	CS771 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	9.80oz (130mm)
	CS774	CS773 (1.03mm)	CS772 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	10.01oz (131mm)
	CS775	CS774 (1.03mm)	CS773 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	10.22oz (132mm)
	CS776	CS775 (1.03mm)	CS774 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	10.43oz (133mm)
English	CS777	CS776 (1.03mm)	CS775 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	10.64oz (134mm)
	CS778	CS777 (1.03mm)	CS776 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	10.85oz (135mm)
	CS779	CS778 (1.03mm)	CS777 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	11.06oz (136mm)
	CS780	CS779 (1.03mm)	CS778 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	11.27oz (137mm)
	CS781	CS780 (1.03mm)	CS779 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	11.48oz (138mm)
English	CS782	CS781 (1.03mm)	CS780 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	11.69oz (139mm)
	CS783	CS782 (1.03mm)	CS781 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	11.90oz (140mm)
	CS784	CS783 (1.03mm)	CS782 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	12.11oz (141mm)
	CS785	CS784 (1.03mm)	CS783 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	12.32oz (142mm)
	CS786	CS785 (1.03mm)	CS784 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	12.53oz (143mm)
English	CS787	CS786 (1.03mm)	CS785 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	12.74oz (144mm)
	CS788	CS787 (1.03mm)	CS786 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	12.95oz (145mm)
	CS789	CS788 (1.03mm)	CS787 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	13.16oz (146mm)
	CS790	CS789 (1.03mm)	CS788 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	13.37oz (147mm)
	CS791	CS790 (1.03mm)	CS789 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	13.58oz (148mm)
English	CS792	CS791 (1.03mm)	CS790 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	13.79oz (149mm)
	CS793	CS792 (1.03mm)	CS791 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	14.00oz (150mm)
	CS794	CS793 (1.03mm)	CS792 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	14.21oz (151mm)
	CS795	CS794 (1.03mm)	CS793 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	14.42oz (152mm)
	CS796	CS795 (1.03mm)	CS794 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	14.63oz (153mm)
English	CS797	CS796 (1.03mm)	CS795 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	14.84oz (154mm)
	CS798	CS797 (1.03mm)	CS796 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	15.05oz (155mm)
	CS799	CS798 (1.03mm)	CS797 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	15.26oz (156mm)
	CS800	CS799 (1.03mm)	CS798 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	15.47oz (157mm)
	CS801	CS800 (1.03mm)	CS799 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	15.68oz (158mm)
English	CS802	CS801 (1.03mm)	CS800 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	15.89oz (159mm)
	CS803	CS802 (1.03mm)	CS801 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	16.10oz (160mm)
	CS804	CS803 (1.03mm)	CS802 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	16.31oz (161mm)
	CS805	CS804 (1.03mm)	CS803 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	16.52oz (162mm)
	CS806	CS805 (1.03mm)	CS804 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	16.73oz (163mm)
English	CS807	CS806 (1.03mm)	CS805 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	16.94oz (164mm)
	CS808	CS807 (1.03mm)	CS806 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	17.15oz (165mm)
	CS809	CS808 (1.03mm)	CS807 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	17.36oz (166mm)
	CS810	CS809 (1.03mm)	CS808 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	17.57oz (167mm)
	CS811	CS810 (1.03mm)	CS809 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	17.78oz (168mm)
English	CS812	CS811 (1.03mm)	CS810 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	17.99oz (169mm)
	CS813	CS812 (1.03mm)	CS811 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	18.20oz (170mm)
	CS814	CS813 (1.03mm)	CS812 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	18.41oz (171mm)
	CS815	CS814 (1.03mm)	CS813 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	18.62oz (172mm)
	CS816	CS815 (1.03mm)	CS814 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	18.83oz (173mm)
English	CS817	CS816 (1.03mm)	CS815 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	19.04oz (174mm)
	CS818	CS817 (1.03mm)	CS816 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	19.25oz (175mm)
	CS819	CS818 (1.03mm)	CS817 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	19.46oz (176mm)
	CS820	CS819 (1.03mm)	CS818 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	19.67oz (177mm)
	CS821	CS820 (1.03mm)	CS819 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	19.88oz (178mm)
English	CS822	CS821 (1.03mm)	CS820 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	20.09oz (179mm)
	CS823	CS822 (1.03mm)	CS821 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	20.30oz (180mm)
	CS824	CS823 (1.03mm)	CS822 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	20.51oz (181mm)
	CS825	CS824 (1.03mm)	CS823 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	20.72oz (182mm)
	CS826	CS825 (1.03mm)	CS824 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	20.93oz (183mm)
English	CS827	CS826 (1.03mm)	CS825 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	21.14oz (184mm)
	CS828	CS827 (1.03mm)	CS826 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	21.35oz (185mm)
	CS829	CS828 (1.03mm)	CS827 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	21.56oz (186mm)
	CS830	CS829 (1.03mm)	CS828 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	21.77oz (187mm)
	CS831	CS830 (1.03mm)	CS829 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	21.98oz (188mm)
English	CS832	CS831 (1.03mm)	CS830 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	22.19oz (189mm)
	CS833	CS832 (1.03mm)	CS831 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	22.40oz (190mm)
	CS834	CS833 (1.03mm)	CS832 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	22.61oz (191mm)
	CS835	CS834 (1.03mm)	CS833 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	22.82oz (192mm)
	CS836	CS835 (1.03mm)	CS834 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	23.03oz (193mm)
English	CS837	CS836 (1.03mm)	CS835 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	23.24oz (194mm)
	CS838	CS837 (1.03mm)	CS836 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	23.45oz (195mm)
	CS839	CS838 (1.03mm)	CS837 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	23.66oz (196mm)
	CS840	CS839 (1.03mm)	CS838 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	23.87oz (197mm)
	CS841	CS840 (1.03mm)	CS839 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	24.08oz (198mm)
English	CS842	CS841 (1.03mm)	CS840 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	24.29oz (199mm)
	CS843	CS842 (1.03mm)	CS841 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	24.50oz (200mm)
	CS844	CS843 (1.03mm)	CS842 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	24.71oz (201mm)
	CS845	CS844 (1.03mm)	CS843 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	24.92oz (202mm)
	CS846	CS845 (1.03mm)	CS844 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	25.13oz (203mm)
English	CS847	CS846 (1.03mm)	CS845 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	25.34oz (204mm)
	CS848	CS847 (1.03mm)	CS846 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	25.55oz (205mm)
	CS849	CS848 (1.03mm)	CS847 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	25.76oz (206mm)
	CS850	CS849 (1.03mm)	CS848 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	25.97oz (207mm)
	CS851	CS850 (1.03mm)	CS849 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	26.18oz (208mm)
English	CS852	CS851 (1.03mm)	CS850 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	26.39oz (209mm)
	CS853	CS852 (1.03mm)	CS851 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	26.60oz (210mm)
	CS854	CS853 (1.03mm)	CS852 (1.03mm)	Two-Way Speaker	100W	300W	75Hz - 20kHz	4 Ohms	26.81oz (211mm)
	CS855	CS854 (1.03mm)	CS853 (1.03mm)	Two-Way Speaker	10				

[illegible][illegible]

Especificações										Tipo					
Pontas Contínuas em funcionamento		Fluxo de Potência em funcionamento		Frequência de resposta		Sensibilidade (dB/√ @ 1m)		Diâmetro exterior		Diâmetro do cabo de montagem		Propriedade total de montagem		Propriedade de montagem	
CS760C	6-1/2" componente CS760C	30W	35W	75Hz - 20kHz	105W	40ms	90dB	5-1/8" (130mm)	4-3/4" (120mm)	3-15/32" (88mm)	2-5/16" (65mm)	2-9/32" (58mm)	2-5/16" (65mm)	2-19/32" (66mm)	2-5/16" (65mm)
		47	5-1/4"	75Hz - 20kHz	105W	40ms	90dB	5-1/8" (130mm)	4-3/4" (120mm)	3-15/32" (88mm)	2-5/16" (65mm)	2-9/32" (58mm)	2-5/16" (65mm)	2-19/32" (66mm)	2-5/16" (65mm)
		CS734	35W	70Hz - 20kHz	135W	40ms	93dB	5-1/8" (130mm)	4-3/4" (120mm)	3-15/32" (88mm)	2-5/16" (65mm)	2-9/32" (58mm)	2-5/16" (65mm)	2-19/32" (66mm)	2-5/16" (65mm)
		CS732	45W	55Hz - 20kHz	135W	40ms	93dB	5-1/8" (130mm)	4-3/4" (120mm)	3-15/32" (88mm)	2-5/16" (65mm)	2-9/32" (58mm)	2-5/16" (65mm)	2-19/32" (66mm)	2-5/16" (65mm)
		CS763	45W	55Hz - 20kHz	135W	40ms	93dB	5-1/8" (130mm)	4-3/4" (120mm)	3-15/32" (88mm)	2-5/16" (65mm)	2-9/32" (58mm)	2-5/16" (65mm)	2-19/32" (66mm)	2-5/16" (65mm)
CS760C	6-1/2" componente CS760C	30W	35W	75Hz - 20kHz	105W	40ms	90dB	5-1/8" (130mm)	4-3/4" (120mm)	3-15/32" (88mm)	2-5/16" (65mm)	2-9/32" (58mm)	2-5/16" (65mm)	2-19/32" (66mm)	2-5/16" (65mm)
		47	5-1/4"	75Hz - 20kHz	105W	40ms	90dB	5-1/8" (130mm)	4-3/4" (120mm)	3-15/32" (88mm)	2-5/16" (65mm)	2-9/32" (58mm)	2-5/16" (65mm)	2-19/32" (66mm)	2-5/16" (65mm)
		CS734	35W	70Hz - 20kHz	135W	40ms	93dB	5-1/8" (130mm)	4-3/4" (120mm)	3-15/32" (88mm)	2-5/16" (65mm)	2-9/32" (58mm)	2-5/16" (65mm)	2-19/32" (66mm)	2-5/16" (65mm)
		CS732	45W	55Hz - 20kHz	135W	40ms	93dB	5-1/8" (130mm)	4-3/4" (120mm)	3-15/32" (88mm)	2-5/16" (65mm)	2-9/32" (58mm)	2-5/16" (65mm)	2-19/32" (66mm)	2-5/16" (65mm)
		CS763	45W	55Hz - 20kHz	135W	40ms	93dB	5-1/8" (130mm)	4-3/4" (120mm)	3-15/32" (88mm)	2-5/16" (65mm)	2-9/32" (58mm)	2-5/16" (65mm)	2-19/32" (66mm)	2-5/16" (65mm)

[illegible][illegible][illegible][illegible][illegible][illegible]

Торговая марка:	JBK
Назначение товара:	Автоматизированная аналитическая система
Изготовитель:	ХК «МАНИ ИНТЕРНЭШЛ ИНДУСТРИ ИНКЮРПОРЭТЭЛ С.А.», 69901 КОНЬКВИТЭЛ, С.Г. ГОРЬКОГО, АЛТАЙСКИЙ СПИРТ. КОД. ОДИК. 1900
Сфера происхождения:	Китай
Импорт в Россию:	ООО «КАМАН РУС СБЭКС», РОССИЯ, 123177, МОСКВА, ПРЕСВЕНСКАЯ ДАБ. Д.10
Информация о сервисных центрах:	http://ru.jb.com тел. +7-800-700-0467
Срок службы:	не ограничен
Срок хранения:	7 лет
Условия применения:	Стандартные при нормальных значениях климатических факторов внешнего среды
Комплектация соответствует:	Товар не подлежит обязательной сертификации. Информационные тексты и органы по сертификации «Росстандарт» Москва. [ЭА] «РОССТАНДРТ» № 05-21-0478 от 31.10.2013
