



0 (800) 800 130
(050) 462 0 130
(063) 462 0 130
(067) 462 0 130

130
COM.UA

Internet store of autogoods



km-130

CAR RECEIVERS — Receivers • Media receivers and stations • Native receivers • CD/DVD changers • FM-modulators/USB adapters • Flash memory • Face plates and adapters • Antennas • Accessories | CAR AUDIO — Car audio speakers • Amplifiers • Subwoofers • Processors • Crossovers • Headphones • Accessories | TRIP COMPUTERS — Universal computers • Model computers • Accessories | GPS NAVIGATORS — Portable GPS • Built-in GPS • GPS modules • GPS trackers • Antennas for GPS navigators • Accessories | VIDEO — DVR • TV sets and monitors • Car TV tuners • Cameras • Videomodules • Transcoders • Car TV antennas • Accessories | SECURITY SYSTEMS — Car alarms • Bike alarms • Mechanical blockers • Immobilizers • Sensors • Accessories | OPTIC AND LIGHT — Xenon • Bixenon • Lamps • LED • Stroboscopes • Optic and Headlights • Washers • Light, rain sensors • Accessories | PARKTRONICS AND MIRRORS — Rear parktronic • Front parktronic • Combined parktronic • Rear-view mirrors • Accessories | HEATING AND COOLING — Seat heaters • Mirrors heaters • Screen-wipers heaters • Engine heaters • Auto-refrigerators • Air conditioning units • Accessories | TUNING — Vibro-isolation • Noise-isolation • Tint films • Accessories | ACCESSORIES — Radar-detectors • Handsfree, Bluetooth • Windowlifters • Compressors • Beeps, loudspeakers • Measuring instruments • Cleaners • Carsits • Miscellaneous | MOUNTING — Installation kits • Upholstery • Grilles • Tubes • Cable and wire • Tools • Miscellaneous | POWER — Batteries • Converters • Start-charging equipment • Capacitors • Accessories | MARINE AUDIO AND ELECTRONICS — Marine receivers • Marine audio speakers • Marine subwoofers • Marine amplifiers • Accessories | CAR CARE PRODUCTS — Additives • Washer fluid • Care accessories • Car polish • Flavors • Adhesives and sealants | LIQUID AND OIL — Motor oil • Transmission oil • Brake fluid • Antifreeze • Technical lubricant







In store "130" you can find and buy almost all necessary goods for your auto in Kyiv and other cities, delivery by ground and postal services. Our experienced consultants will provide you with exhaustive information and help you to chose the very particular thing. We are waiting for you at the address

<https://130.com.ua>

Car Audio speaker	汽车音响
Hand-parleur audio automobile	车载扬声器
Alto-falante automotivo	汽车音响喇叭
Fanzengautisuspecher	车载扬声器
Diffusore Car Audio	汽车音响喇叭
Autoluidspreker	车载扬声器
Bistèreophon/italar	汽车音响喇叭
Autokuitin	汽车音响喇叭
Автомобильный динамик	汽车音响喇叭
Bilhögtalare	汽车音响喇叭
Bhögtalare	汽车音响喇叭
Speaker car Audio	汽车音响喇叭
Araba Ses Hopartörü	汽车音响喇叭

[illegible]

by HARMAN

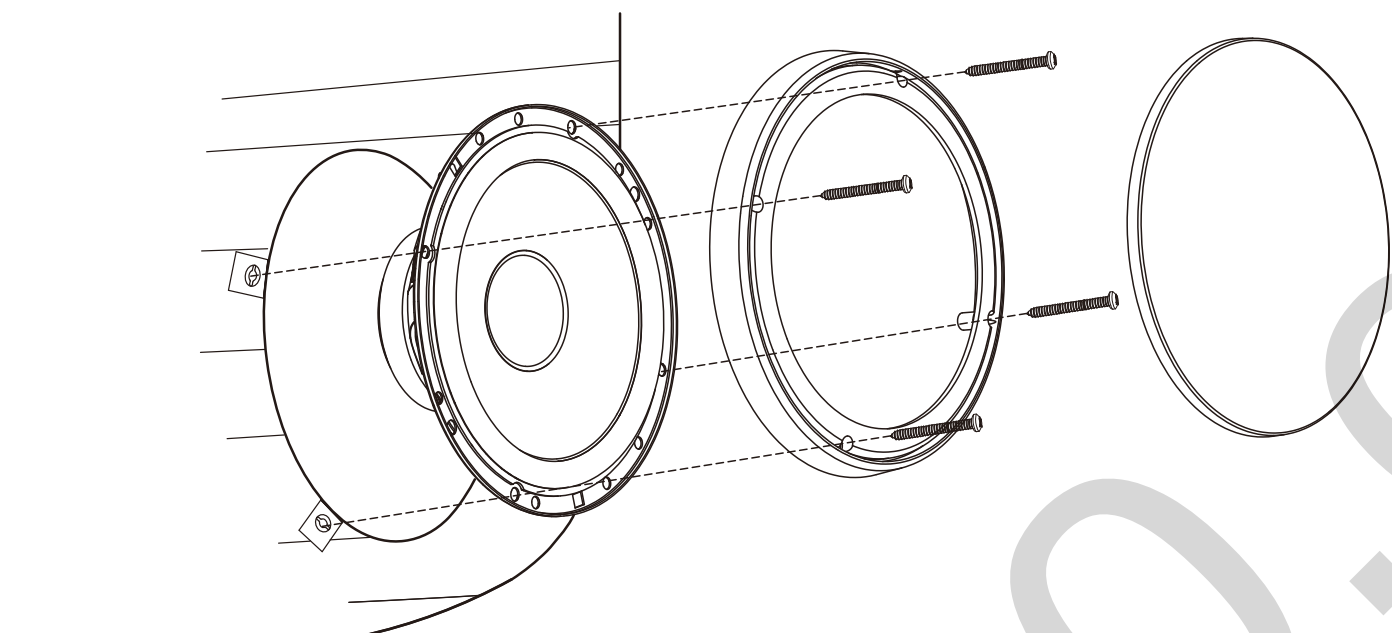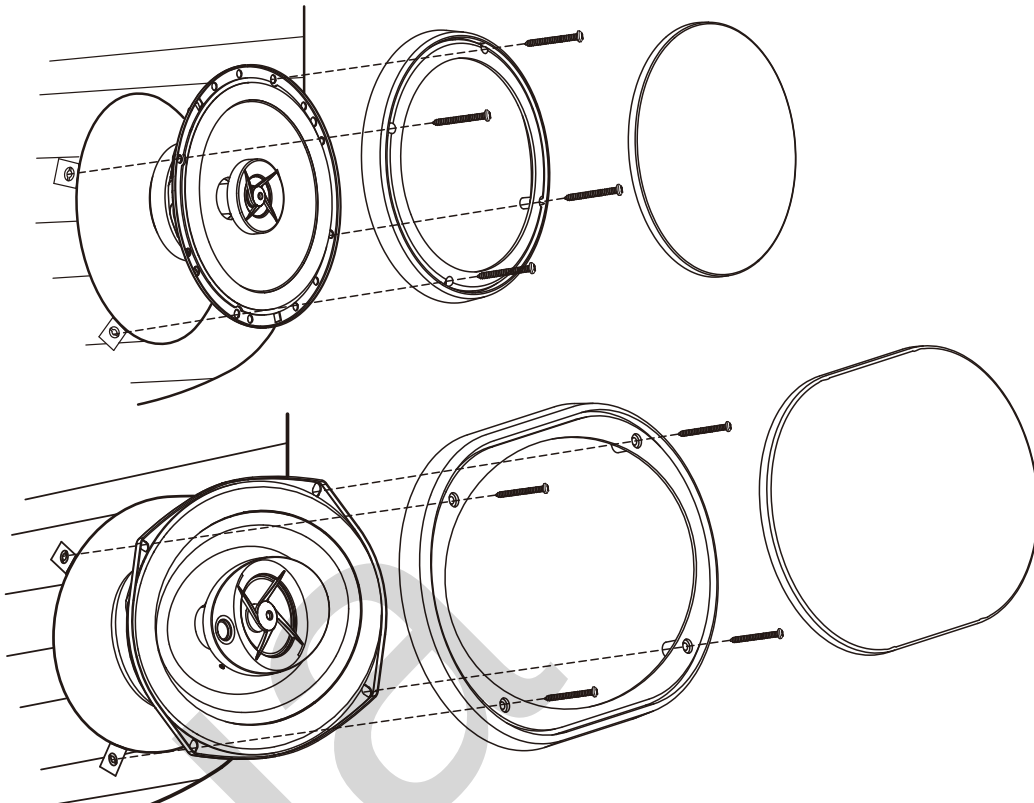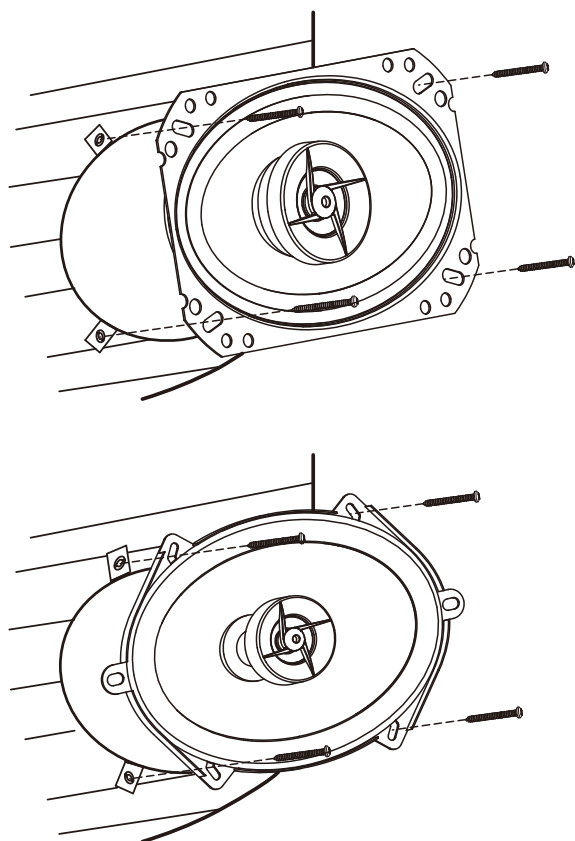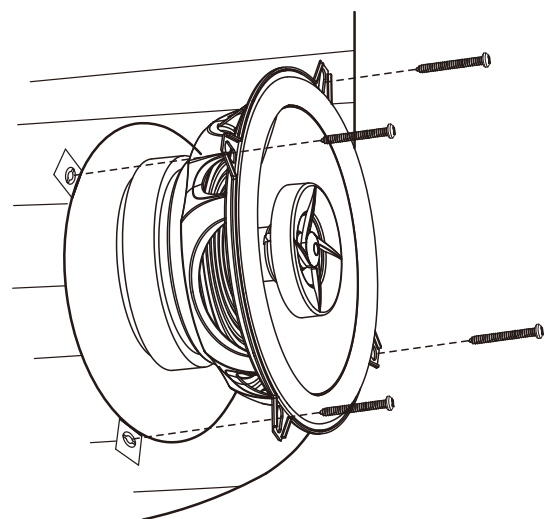

www.jbl.com

Diagram illustrating the connection of a 12V battery to a car stereo. The battery is connected to the car's chassis (ground) and a fuse. The positive terminal is connected to the stereo's power input through a fuse. The negative terminal is connected to the stereo's ground input.

Technical drawings of the 16-inch subwoofer showing front and top views with dimensions.


Front View Dimensions:

- Overall Diameter: 16" (406.4mm)
- Mounting Flange Diameter: 11 1/16" (280.9mm)
- Mounting Flange Thickness: 2 29/32" (74mm)
- Mounting Flange Hole Diameter: 3 7/16" (86.9mm)


Top View Dimensions:

- Overall Diameter: 16" (406.4mm)
- Mounting Flange Diameter: 11 1/4" (294.6mm)
- Mounting Flange Hole Diameter: 5 29/32" (150.2mm)

STAGE 6402

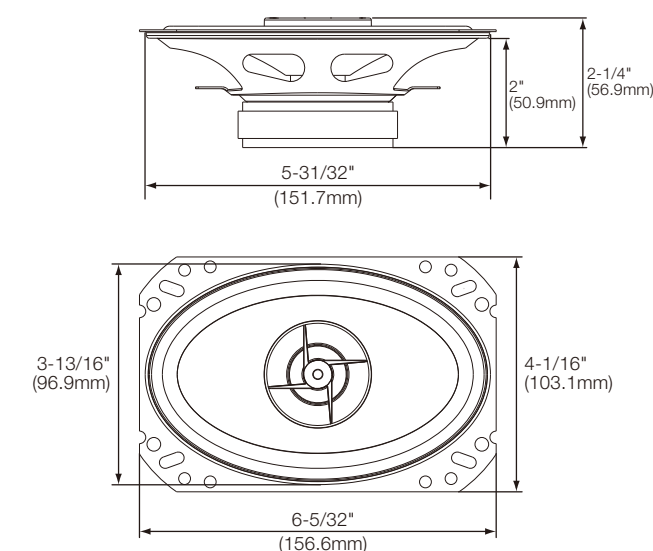

STAGE 8602

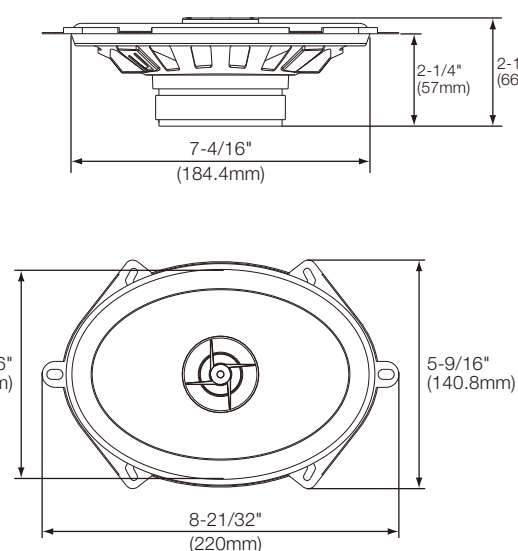

SPECIFICATIONS	STAGE 502	STAGE 602	STAGE 6402	STAGE 8602	STAGE 9603	STAGE 600C
Type	5-1/4" (130mm) Coaxial Car Speaker	6-1/2" (165mm) Coaxial Car Speaker	4" x 6" (102mm x 152mm) Coaxial Car Speaker	6" x 8" (152mm x 203mm) Coaxial Car Speaker	6" x 9" (152mm x 230mm) Three-Way Car Speaker	6-1/2" Car Audio Component System
Continuous power handling	35W	45W	35W	60W	70W	50W
Peak power handling	105W	135W	105W	180W	210W	150W
Frequency response	70Hz – 20kHz	55Hz – 20kHz	75Hz – 20kHz	20Hz – 20kHz	45Hz – 20kHz	50Hz – 20kHz
Nominal impedance	4 ohms	4 ohms	4 ohms	4 ohms	4 ohms	4 ohms
Sensitivity (2.83V/m)	91dB	91dB	90dB	91dB	92dB	90dB
External diameter	5-1/8" (130mm)	6-9/16" (166.4mm)	6-5/32" (156.6mm) x 4-1/16" (103.1mm)	8-21/32" (220mm) x 5-9/16" (140.8mm)	9-1/4" (234.6mm) x 6-7/16" (163.6mm)	6-9/16" (166.4mm)
Mounting cutout diameter	4-3/4" (120mm)	5-12/16" (145.7mm)	5-31/32" (151.7mm)	7-4/16" (184.4mm)	8-11/16" (220.9mm)	5-12/16" (145.7mm)
Total depth	2-1/2" (63.1mm)	2-10/16" (66.4mm)	2-1/4" (56.9mm)	2-10/16" (66.7mm)	3-7/16" (86.9mm)	2-10/16" (66.4mm)
Mounting depth	2-3/16" (56mm)	2-5/16" (58.7mm)	2" (50.9mm)	2-1/4" (57mm)	2-29/32" (74mm)	2-5/16" (58.7mm)

ESPECIFICAÇÕES	STAGE 502	STAGE 602	STAGE 6402	STAGE 8602	STAGE 9603	STAGE 600C
Tipo	5-1/4" (130mm) Alto falante automotivo coaxial	6-1/2" (165mm) Alto falante automotivo coaxial	4" x 6" (102mm x 152mm) Alto falante automotivo coaxial	6" x 8" (152mm x 203mm) Alto falante automotivo coaxial	6" x 9" (152mm x 230mm) Alto falante automotivo triaxial	6-1/2" Car Audio Sistema de componentes
Potência contínua máxima	35W	45W	35W	60W	70W	50W
Potência máxima de pico	105W	135W	105W	180W	210W	150W
Resposta de frequência	70Hz – 20kHz	55Hz – 20kHz	75Hz – 20kHz	20Hz – 20kHz	45Hz – 20kHz	50Hz – 20kHz
Impedância nominal	4 ohms	4 ohms	4 ohms	4 ohms	4 ohms	4 ohms
Sensibilidade (2,83V/m)	91dB	91dB	90dB	91dB	92dB	90dB
Diâmetro externo	5-1/8" (130mm)	6-9/16" (166.4mm)	6-5/32" (156.6mm) x 4-1/16" (103.1mm)	8-21/32" (220mm) x 5-9/16" (140.8mm)	9-1/4" (234.6mm) x 6-7/16" (163.6mm)	6-9/16" (166.4mm)
Diâmetro do corte de montagem	4-3/4" (120mm)	5-12/16" (145.7mm)	5-31/32" (151.7mm)	7-4/16" (184.4mm)	8-11/16" (220.9mm)	5-12/16" (145.7mm)
Profundidade total	2-1/2" (63.1mm)	2-10/16" (66.4mm)	2-1/4" (56.9mm)	2-10/16" (66.7mm)	3-7/16" (86.9mm)	2-10/16" (66.4mm)
Profundidade de montagem	2-3/16" (56mm)	2-5/16" (58.7mm)	2" (50.9mm)	2-1/4" (57mm)	2-29/32" (74mm)	2-5/16" (58.7mm)

TECHNISCHE DATEN	STAGE 502	STAGE 602	STAGE 6402	STAGE 8602	STAGE 9603	STAGE 600C
Typ	5-1/4" (130mm) Koaxialer Fahrzeuglautsprecher	6-1/2" (165mm) Koaxialer Fahrzeuglautsprecher	4" x 6" (102mm x 152mm) Koaxialer Fahrzeuglautsprecher	6" x 8" (152mm x 203mm) Koaxialer Fahrzeuglautsprecher	6" x 9" (152mm x 230mm) Drei-Wege- Fahrzeuglautsprecher	6-1/2" Car Audio Komponentensystem
Kontinuierliche Leistung	35W	45W	35W	60W	70W	50W
Spitzenleistung	105W	135W	105W	180W	210W	150W
Frequenzbereich	70Hz – 20kHz	55Hz – 20kHz	75Hz – 20kHz	20Hz – 20kHz	45Hz – 20kHz	50Hz – 20kHz
Nennimpedanz	4 ohms	4 ohms	4 ohms	4 ohms	4 ohms	4 ohms
Empfindlichkeit (2,83V/m)	91dB	91dB	90dB	91dB	92dB	90dB
Äußerer Durchmesser	5-1/8" (130mm)	6-9/16" (166.4mm)	6-5/32" (156.6mm) x 4-1/16" (103.1mm)	8-21/32" (220mm) x 5-9/16" (140.8mm)	9-1/4" (234.6mm) x 6-7/16" (163.6mm)	6-9/16" (166.4mm)
Gesamtschnitt-Durchmesser	4-3/4" (120mm)	5-12/16" (145.7mm)	5-31/32" (151.7mm)	7-4/16" (184.4mm)	8-11/16" (220.9mm)	5-12/16" (145.7mm)
Montagtiefe	2-1/2" (63.1mm)	2-10/16" (66.4mm)	2-1/4" (56.9mm)	2-10/16" (66.7mm)	3-7/16" (86.9mm)	2-10/16" (66.4mm)
Montagetiefe	2-3/16" (56mm)	2-5/16" (58.7mm)	2" (50.9mm)	2-1/4" (57mm)	2-29/32" (74mm)	2-5/16" (58.7mm)

SPESIFIKASJONER	STAGE 502	STAGE 602	STAGE 6402	STAGE 8602	STAGE 9603	STAGE 600C
Type	5-1/4" (130mm) Koaksial bihøyttaler	6-1/2" (165mm) Koaksial bihøyttaler	4" x 6" (102mm x 152mm) Koaksial bihøyttaler	6" x 8" (152mm x 203mm) Koaksial bihøyttaler	6" x 9" (152mm x 230mm) Tre-veis bihøyttaler	6-1/2" Car Audio Komponentsystem
Kontinuerlig effekthåndtering	35W	45W	35W	60W	70W	50W
Toppuffekthåndtering	105W	135W	105W	180W	210W	150W
Frekvensrespons	70Hz – 20kHz	55Hz – 20kHz	75Hz – 20kHz	20Hz – 20kHz	45Hz – 20kHz	50Hz – 20kHz
Nominell impedans	4 ohms	4 ohms	4 ohms	4 ohms	4 ohms	4 ohms
Sensitivitet (2,83 V/m)	91dB	91dB	90dB	91dB	92dB	90dB
Ekstern diameter	5-1/8" (130mm)	6-9/16" (166.4mm)	6-5/32" (156.6mm) x 4-1/16" (103.1mm)	8-21/32" (220mm) x 5-9/16" (140.8mm)	9-1/4" (234.6mm) x 6-7/16" (163.6mm)	6-9/16" (166.4mm)
Monteringsdiameter	4-3/4" (120mm)	5-12/16" (145.7mm)	5-31/32" (151.7mm)	7-4/16" (184.4mm)	8-11/16" (220.9mm)	5-12/16" (145.7mm)
Totaldybde	2-1/2" (63.1mm)	2-10/16" (66.4mm)	2-1/4" (56.9mm)	2-10/16" (66.7mm)	3-7/16" (86.9mm)	2-10/16" (66.4mm)
Monteringsdybde	2-3/16" (56mm)	2-5/16" (58.7mm)	2" (50.9mm)	2-1/4" (57mm)	2-29/32" (74mm)	2-5/16" (58.7mm)

TEKNISET TIEDOT	STAGE 502	STAGE 602	STAGE 6402	STAGE 8602	STAGE 9603	STAGE 600C
Tyyppi	5-1/4" (130mm) Koaksiaalibihyttäler	6-1/2" (165mm) Koaksiaalibihyttäler	4" x 6" (102mm x 152mm) Koaksiaalibihyttäler	6" x 8" (152mm x 203mm) Koaksiaalibihyttäler	6" x 9" (152mm x 230mm) Kolmitie-autokautin	6-1/2" Car Audio Komponenttijärjestelmä
Tehonkesto jatkuva	35W	45W	35W	60W	70W	50W
Tehonkesto huippu	105W	135W	105W	180W	210W	150W
Taajuusvaste	70Hz – 20kHz	55Hz – 20kHz	75Hz – 20kHz	20Hz – 20kHz	45Hz – 20kHz	50Hz – 20kHz
Nimellimpedanssi	4 ohms	4 ohms	4 ohms	4 ohms	4 ohms	4 ohms
Herkkyys (2,83 V/m)	91dB	91dB	90dB	91dB	92dB	90dB
Ulkoinen halkaisija	5-1/8" (130mm)	6-9/16" (166.4mm)	6-5/32" (156.6mm) x 4-1/16" (103.1mm)	8-21/32" (220mm) x 5-9/16" (140.8mm)	9-1/4" (234.6mm) x 6-7/16" (163.6mm)	6-9/16" (166.4mm)
Asennusaukon halkaisija	4-3/4" (120mm)	5-12/16" (145.7mm)	5-31/32" (151.7mm)	7-4/16" (184.4mm)	8-11/16" (220.9mm)	5-12/16" (145.7mm)
Kokonaissyvyys	2-1/2" (63.1mm)	2-10/16" (66.4mm)	2-1/4" (56.9mm)	2-10/16" (66.7mm)	3-7/16" (86.9mm)	2-10/16" (66.4mm)
Asennussyvyys	2-3/16" (56mm)	2-5/16" (58.7mm)	2" (50.9mm)	2-1/4" (57mm)	2-29/32" (74mm)	2-5/16" (58.7mm)

SPECIFIKATIONER	STAGE 502	STAGE 602	STAGE 6402	STAGE 8602	STAGE 9603	STAGE 600C
Type	5-1/4" (130mm) Koaksial bihögtalare	6-1/2" (165mm) Koaksial bihögtalare	4" x 6" (102mm x 152mm) Koaksial bihögtalare	6" x 8" (152mm x 203mm) Koaksial bihögtalare	6" x 9" (152mm x 230mm) Treveis bihögtalare	6-1/2" Car Audio Komponentsystem
Kontinuerlig effekthåndtering	35W	45W	35W	60W	70W	50W
Spidsbelastning	105W	135W	105W	180W	210W	150W
Frekvensområde	70Hz – 20kHz	55Hz – 20kHz	75Hz – 20kHz	20Hz – 20kHz	45Hz – 20kHz	50Hz – 20kHz
Nominel impedans	4 ohms	4 ohms	4 ohms	4 ohms	4 ohms	4 ohms
Følsomhed (2,83 V/m)	91dB	91dB	90dB	91dB	92dB	90dB
Udvendig diameter	5-1/8" (130mm)	6-9/16" (166.4mm)	6-5/32" (156.6mm) x 4-1/16" (103.1mm)	8-21/32" (220mm) x 5-9/16" (140.8mm)	9-1/4" (234.6mm) x 6-7/16" (163.6mm)	6-9/16" (166.4mm)
Diameter for monteringsudskæring	4-3/4" (120mm)	5-12/16" (145.7mm)	5-31/32" (151.7mm)	7-4/16" (184.4mm)	8-11/16" (220.9mm)	5-12/16" (145.7mm)
Samlet dybde	2-1/2" (63.1mm)	2-10/16" (66.4mm)	2-1/4" (56.9mm)	2-10/16" (66.7mm)	3-7/16" (86.9mm)	2-10/16" (66.4mm)
Monteringsdybde	2-3/16" (56mm)	2-5/16" (58.7mm)	2" (50.9mm)	2-1/4" (57mm)	2-29/32" (74mm)	2-5/16" (58.7mm)

仕様書	STAGE 502	STAGE 602	STAGE 6402	STAGE 8602	STAGE 9603	STAGE 600C
型	5-1/4" (130mm) 同軸カースピーカー	6-1/2" (165mm) 同軸カースピーカー	4" x 6" (102mm x 152mm) 同軸カースピーカー	6" x 8" (152mm x 203mm) 同軸カースピーカー	6" x 9" (152mm x 230mm) 3ウェイカースピーカー	6-1/2" Car Audio コンポーネントシステム
連続許容入力	35W	45W	35W	60W	70W	50W
ピーク許容入力	105W	135W	105W	180W	210W	150W
周波数特性	70Hz – 20kHz	55Hz – 20kHz	75Hz – 20kHz	20Hz – 20kHz	45Hz – 20kHz	50Hz – 20kHz
公称インピーダンス	4 ohms	4 ohms	4 ohms	4 ohms	4 ohms	4 ohms
感度(2.83V/m)	91dB	91dB	90dB	91dB	92dB	90dB
外形直径	5-1/8" (130mm)	6-9/16" (166.4mm)	6-5/32" (156.6mm) x 4-1/16" (103.1mm)	8-21/32" (220mm) x 5-9/16" (140.8mm)	9-1/4" (234.6mm) x 6-7/16" (163.6mm)	6-9/16" (166.4mm)
取り付けカットアウト直径	4-3/4" (120mm)	5-12/16" (145.7mm)	5-31/32" (151.7mm)	7-4/16" (184.4mm)	8-11/16" (220.9mm)	5-12/16" (145.7mm)
トータル寸法	2-1/2" (63.1mm)	2-10/16" (66.4mm)	2-1/4" (56.9mm)	2-10/16" (66.7mm)	3-7/16" (86.9mm)	2-10/16" (66.4mm)
埋め込み寸法	2-3/16" (56mm)	2-5/16" (58.7mm)	2" (50.9mm)	2-1/4" (57mm)	2-29/32" (74mm)	2-5/16" (58.7mm)

规格	STAGE 502	STAGE 602	STAGE 6402	STAGE 8602	STAGE 9603	STAGE 600C
类型	5-1/4" (130mm) 同轴车载扬声器	6-1/2" (165mm) 同轴车载扬声器	4" x 6" (102mm x 152mm) 同轴车载扬声器	6" x 8" (152mm x 203mm) 同轴车载扬声器	6" x 9" (152mm x 230mm) 三分频车载扬声器	6-1/2" Car Audio 分体音响系统
连续功率承受能力	35W	45W	35W	60W	70W	50W
峰值功率承受能力	105W	135W	105W	180W	210W	150W
频率响应	70Hz – 20kHz	55Hz – 20kHz	75Hz – 20kHz	20Hz – 20kHz	45Hz – 20kHz	50Hz – 20kHz
标称阻抗	4 ohms	4 ohms	4 ohms	4 ohms	4 ohms	4 ohms
灵敏度 (2.83V/m)	91dB	91dB	90dB	91dB	92dB	90dB
外径	5-1/8" (130mm)	6-9/16" (166.4mm)	6-5/32" (156.6mm) x 4-1/16" (103.1mm)	8-21/32" (220mm) x 5-9/16" (140.8mm)	9-1/4" (234.6mm) x 6-7/16" (163.6mm)	6-9/16" (166.4mm)
安装切口直径	4-3/4" (120mm)	5-12/16" (145.7mm)	5-31/32" (151.7mm)	7-4/16" (184.4mm)	8-11/16" (220.9mm)	5-12/16" (145.7mm)
总厚度	2-1/2" (63.1mm)	2-10/16" (66.4mm)	2-1/4" (56.9mm)	2-10/16" (66.7mm)	3-7/16" (86.9mm)	2-10/16" (66.4mm)
安装深度	2-3/16" (56mm)	2-5/16" (58.7mm)	2" (50.9mm)	2-1/4" (57mm)	2-29/32" (74mm)	2-5/16" (58.7mm)

规格	STAGE 502	STAGE 602	STAGE 6402	STAGE 8602	STAGE 9603	STAGE 600C
類型	5-1/4" (130mm) 同軸汽車喇叭	6-1/2" (165mm) 同軸汽車喇叭	4" x 6" (102mm x 152mm) 同軸汽車喇叭	6" x 8" (152mm x 203mm) 同軸汽車喇叭	6" x 9" (152mm x 230mm) 三路汽車喇叭	6-1/2" Car Audio 分體音響系統
連續的功率處理	35W	45W	35W	60W	70W	50W
峰值的功率處理	105W	135W	105W	180W	210W	150W
頻率回應	70Hz – 20kHz	55Hz – 20kHz	75Hz – 20kHz	20Hz – 20kHz	45Hz – 20kHz	50Hz – 20kHz
標稱阻抗	4 ohms	4 ohms	4 ohms	4 ohms	4 ohms	4 ohms
感度度 (2.83V/m)	91dB	91dB	90dB	91dB	92dB	90dB
外徑	5-1/8" (130mm)	6-9/16" (166.4mm)	6-5/32" (156.6mm) x 4-1/16" (103.1mm)	8-21/32" (220mm) x 5-9/16" (140.8mm)	9-1/4" (234.6mm) x 6-7/16" (163.6mm)	6-9/16" (166.4mm)
安裝開孔直徑	4-3/4" (120mm)	5-12/16" (145.7mm)	5-31/32" (151.7mm)	7-4/16" (184.4mm)	8-11/16" (220.9mm)	5-12/16" (145.7mm)
總厚度	2-1/2" (63.1mm)	2-10/16" (66.4mm)	2-1/4" (56.9mm)	2-10/16" (66.7mm)	3-7/16" (86.9mm)	2-10/16" (66.4mm)
安裝深度	2-3/16" (56mm)	2-5/16" (58.7mm)	2" (50.9mm)	2-1/4" (57mm)	2-29/32" (74mm)	2-5/16" (58.7mm)

SPECIFICATIONS	STAGE 502	STAGE 602	STAGE 6402	STAGE 8602	STAGE 9603	STAGE 600C
Type	5-1/4" (130mm) Haut-parleur automobile coaxial	6-1/2" (165mm) Haut-parleur automobile coaxial	4" x 6" (102mm x 152mm) Haut-parleur automobile coaxial	6" x 8" (152mm x 203mm) Haut-parleur automobile coaxial	6" x 9" (152mm x 230mm) Haut-parleur automobile trois voies	6-1/2" Car Audio Système de composants
Puissance admissible continue	35W	45W	35W	60W	70W	50W
Puissance admissible crête	105W	135W	105W	180W	210W	150W
Réponse en fréquence	70Hz – 20kHz	55Hz – 20kHz	75Hz – 20kHz	20Hz – 20kHz	45Hz – 20kHz	50Hz – 20kHz
Impédance nominale	4 ohms	4 ohms	4 ohms	4 ohms	4 ohms	4 ohms
Sensibilité (2,83V/m)	91dB	91dB	90dB	91dB	92dB	90dB
Diamètre externe	5-1/8" (130mm)	6-9/16" (166.4mm)	6-5/32" (156.6mm) x 4-1/16" (103.1mm)	8-21/32" (220mm) x 5-9/16" (140.8mm)	9-1/4" (234.6mm) x 6-7/16" (163.6mm)	6-9/16" (166.4mm)
Diamètre de découpe de montage	4-3/4" (120mm)	5-12/16" (145.7mm)	5-31/32" (151.7mm)	7-4/16" (184.4mm)	8-11/16" (220.9mm)	5-12/16" (145.7mm)
Profondeur totale	2-1/2" (63.1mm)	2-10/16" (66.4mm)	2-1/4" (56.9mm)	2-10/16" (66.7mm)	3-7/16" (86.9mm)	2-10/16" (66.4mm)
Profondeur de montage	2-3/16" (56mm)	2-5/16" (58.7mm)	2" (50.9mm)	2-1/4" (57mm)	2-29/32" (74mm)	2-5/16" (58.7mm)

ESPECIFICACIONES	STAGE 502	STAGE 602	STAGE 6402	STAGE 8602	STAGE 9603	STAGE 600C
Tipo	5-1/4" (130mm) Altavoz coaxial para automóvil	6-1/2" (165mm) Altavoz coaxial para automóvil	4" x 6" (102mm x 152mm) Altavoz coaxial para automóvil	6" x 8" (152mm x 203mm) Altavoz coaxial para automóvil	6" x 9" (152mm x 230mm) Altavoz de tres vías para automóvil	6-1/2" Car Audio Sistema de componentes
Gestión de potencia máxima continua	45W	35W	60W	70W	50W	
Gestión de potencia pico	105W	135W	105W	210W	150W	
Intervalo de frecuencias	70Hz – 20kHz	55Hz – 20kHz	75Hz – 20kHz	20Hz – 20kHz	45Hz – 20kHz	50Hz – 20kHz
Impedancia nominal	4 ohms	4 ohms	4 ohms	4 ohms	4 ohms	4 ohms
Sensibilidad (2.83V/m)	91dB	91dB	90dB	91dB	92dB	90dB
Diámetro externo	5-1/8" (130mm)	6-9/16" (166mm)	6-5/32" (156.6mm x 4-1/16" (103.1mm)	8-21/32" (220mm x 5-9/16" (140.8mm)	9-1/4" (234.6mm x 6-7/16" (163.6mm)	6-9/16" (166mm)
Diámetro de corte para montaje	4-3/4" (120mm)	5-12/16" (145.7mm)	5-13/32" (151.7mm)	7-4/16" (184.4mm)	8-11/16" (220.9mm)	5-12/16" (145.7mm)
Profundidad total	2-1/2" (63.1mm)	2-10/16" (66.4mm)	2-1/4" (56.9mm)	2-10/16" (66.7mm)	3-7/16" (86.9mm)	2-10/16" (66.4mm)
Profundidad de montaje	2-3/16" (66.2mm)	2-5/16" (58.7mm)	2-1/4" (56.9mm)	2-1/4" (57mm)	2-29/32" (74mm)	2-5/16" (68.7mm)