



PHONES

(044) 360-7-130
 (050) 336-0-130
 (063) 788-0-130
 (067) 233-0-130
 (068) 282-0-130

130 Internet store of autogoods

COM.UA



ICQ
 294-0-130
 597-0-130

SKYPE
 km-130

CAR RECEIVERS — Receivers • Media receivers and stations • Native receivers • CD/DVD changers • FM-modulators/USB adapters • Flash memory • Facia plates and adapters • Antennas • Accessories |
 CAR AUDIO — Car audio speakers • Amplifiers • Subwoofers • Processors • Crossovers • Headphones • Accessories | TRIP COMPUTERS — Universal computers • Model computers • Accessories |
 GPS NAVIGATORS — Portable GPS • Built-in GPS • GPS modules • GPS trackers • Antennas for GPS navigators • Accessories | VIDEO — DVR • TV sets and monitors • Car TV tuners • Cameras • Videomodules
 • Transcoders • Car TV antennas • Accessories | SECURITY SYSTEMS — Car alarms • Bike alarms • Mechanical blockers • Immobilizers • Sensors • Accessories | OPTIC AND LIGHT — Xenon • Bixenon • Lamps
 • LED • Stroboscopes • Optic and Headlights • Washers • Light, rain sensors • Accessories | PARKTRONICS AND MIRRORS — Rear parktronic • Front parktronic • Combined parktronic • Rear-view mirrors
 • Accessories | HEATING AND COOLING — Seat heaters • Mirrors heaters • Screen-wipers heaters • Engine heaters • Auto-refrigerators • Air conditioning units • Accessories | TUNING — Vibro-isolation
 • Noise-isolation • Tint films • Accessories | ACCESSORIES — Radar-detectors • Handsfree, Bluetooth • Windowlifters • Compressors • Beeps, loudspeakers • Measuring instruments • Cleaners • Carsits
 • Miscellaneous | MOUNTING — Installation kits • Upholstery • Grilles • Tubes • Cable and wire • Tools • Miscellaneous | POWER — Batteries • Converters • Start-charging equipment • Capacitors
 • Accessories | MARINE AUDIO AND ELECTRONICS — Marine receivers • Marine audio speakers • Marine subwoofers • Marine amplifiers • Accessories | CAR CARE PRODUCTS — Additives • Washer fluid •
 Care accessories • Car polish • Flavors • Adhesives and sealants | LIQUID AND OIL — Motor oil • Transmission oil • Brake fluid • Antifreeze • Technical lubricant



In store "130" you can find and buy almost all necessary goods for your auto in Kyiv and other cities, delivery by ground and postal services. Our experienced consultants will provide you with exhaustive information and help you to chose the very particular thing. We are waiting for you at the address

<http://130.com.ua>

Elite 165 W-RC



Utopia Be 2-way kit



ADVANTAGES

- Available in 2 versions:
active: without crossover or passive: with crossover

TECHNICAL CHARACTERISTICS

2-way kit, 6 1/2" (165mm) diameter
Woofer: 6 1/2" (165mm)
"W" cone
Beryllium inverted dome tweeter
Max. power: 160W

Nom. power: 80W
Sensitivity [2.83V/1m]: 93dB
Impedance: 2 Ohms
Frequency response: 60Hz - 30kHz
(Grilles supplied)

Elite TB 872



Utopia Be® tweeter




- Pure Beryllium inverted dome
- High power Neodymium ring magnet
- Thick cast zinc alloy mounting

SPECIFICATIONS

Nominal power	20W
Maximum power	200 W
Sensitivity	94.1 dB
Cone	Beryllium
Surround	Poron®
Nom. impedance	8Ohm
DC resistance	6Ohm
VC diameter	20 mm
VC height	1.4mm
Former	Aluminum
Layers	2
Wire	Aluminum
Inductance	-
Xmax	-
Magnet dxh	Neodymium
Magnet weight	-
Flux density	2.1 T
Gap height	2.5 mm
Net weight	-

FREQUENCY RESPONSE / IMPEDANCE

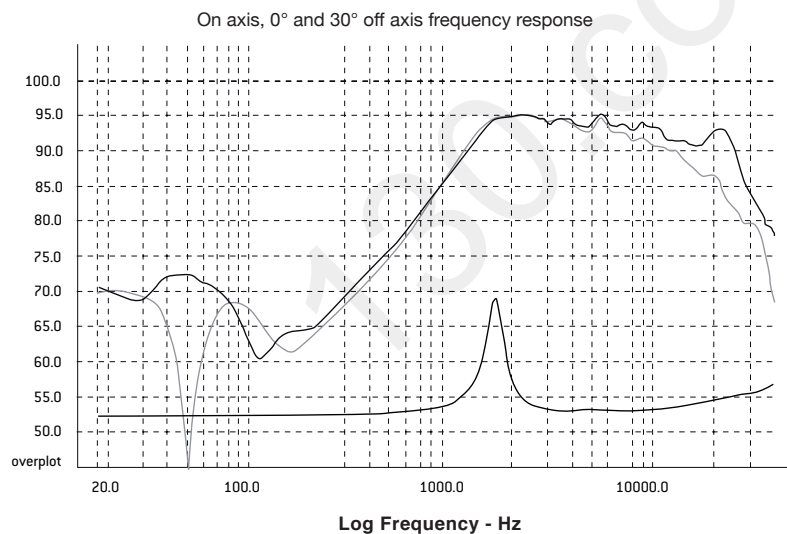


PARAMETERS

Fs	1294 Hz
Vas	-
Qts	-
Qes	-
Qms	-
Re	6Ohm
Sd	7.07cm ²
Cas	-
Mas	-
Ras	-
Cms	-
Mms	-
Rms	-
Ces	-
Les	-
Res	-
Bl	-
SPL	93 dB/W/m

MECHANICAL DRAWING

Unit: mm

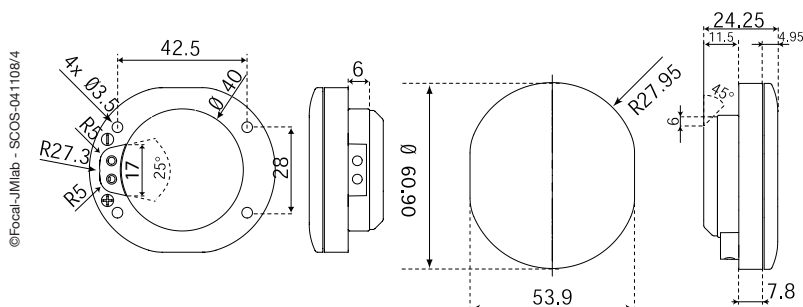

Elite 6W-RC



6 1/2" 165 W-RC woofer




- High power handling
- Aluminum basket
- W composite sandwich cone

SPECIFICATIONS

Nominal power	80W
Maximum power	160W
Sensitivity	93dB
Cone	W
Surround	Butyl
Nom. impedance	2Ohm
DC resistance	1.7Ohm
VC diameter	32mm
VC height	15mm
Former	Kapton®
Layers	2
Wire	Copper
Inductance	0.11 mH
Xmax	5.5
Magnet dxh	90x17
Magnet weight	1550g
Flux density	1 T
Gap height	6 mm
Net weight	1800 g

FREQUENCY RESPONSE / IMPEDANCE

On axis, 0° and 30° off axis frequency response

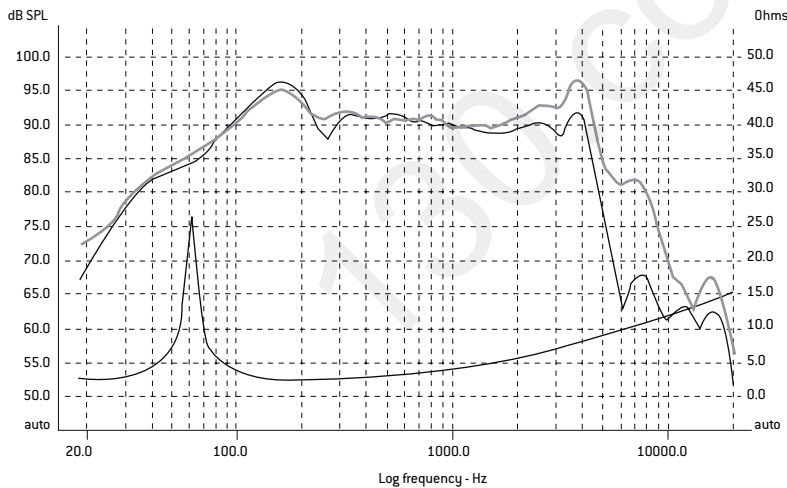


PARAMETERS

Fs	60,85 Hz
Vas	3.68 liters
Qts	0.56
Qes	0.6
Qms	10.43
Re	1.7Ohm
Sd	132.73cm ²
Cas	6.89E-08m ⁵ /N
Mas	99,27Kg/m ⁴
Ras	3639.09Ohm, ac
Cms	3.91E-04m/N
Mms	17.49g
Rms	0.641Kg/s
Ces	923.13mF
Les	7.41mH
Res	29.55Ohm
BI	4.35N/A
SPL	87.45 dB/W/m

MECHANICAL DRAWING

Unit: mm

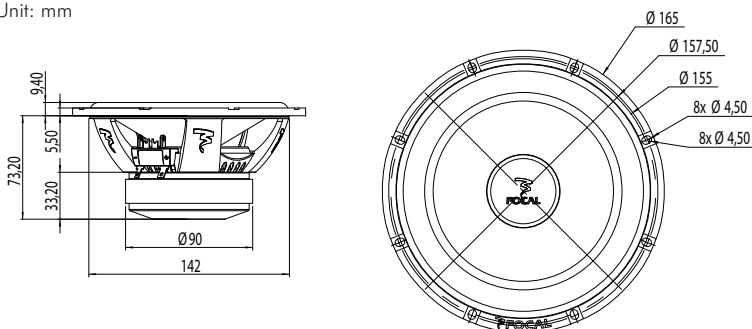

Load	V (l)	F-3 (Hz)
Sealed	30	75